

United States Department of Agriculture

Natural Resources Conservation Service In cooperation with the New Mexico Agricultural Experiment Station

Soil Survey of Curry and Southwest Quay Counties, New Mexico



How To Use This Soil Survey

General Soil Map

The general soil map, which is a color map, shows the survey area divided into groups of associated soils called general soil map units. This map is useful in planning the use and management of large areas.

To find information about your area of interest, locate that area on the map, identify the name of the map unit in the area on the color-coded map legend, then refer to the section **General Soil Map Units** for a general description of the soils in your area.


Detailed Soil Maps

The detailed soil maps can be useful in planning the use and management of small areas.

To find information about your area of interest, locate that area on the **Index to Map Sheets**. Note the number of the map sheet and go to that sheet.

Locate your area of interest on the map sheet. Note the map unit symbols that are in that area. Go to the **Contents**, which lists the map units by symbol and name and shows the page where each map unit is described.

The **Contents** shows which table has data on a specific land use for each detailed soil map unit. Also see the **Contents** for sections of this publication that may address your specific needs.

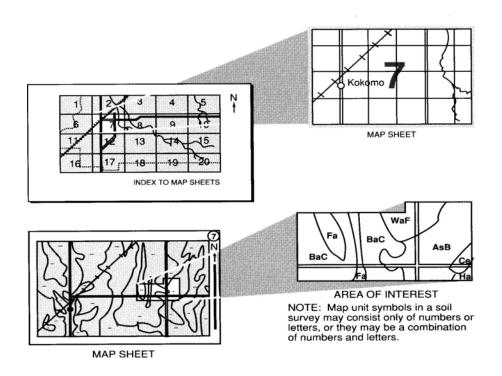

This soil survey is a publication of the National Cooperative Soil Survey, a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service has leadership for the Federal part of the National Cooperative Soil Survey. This survey was made cooperatively by the Natural Resources Conservation Service and the New Mexico Agricultural Experiment Station. The survey is part of the technical assistance furnished to the Central Curry and Southwest Quay Soil and Water Conservation Districts.

Major fieldwork for this soil survey was completed in 1997. Soil names and descriptions were approved in 2007. Unless otherwise indicated, statements in this publication refer to conditions in the survey area in 2007. The most current official data are available on the Internet.

Soil maps in this survey may be copied without permission. Enlargement of these maps, however, could cause misunderstanding of the detail of mapping. If enlarged, maps do not show the small areas of contrasting soils that could have been shown at a larger scale.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410, or call (800) 795-3272 (voice) or (202) 795-6382 (TDD). USDA is an equal opportunity provider and employer.

Cover: The principle dryland crops grown are winter wheat and grain sorghum, shown here, on Olton clay loam, 0 to 1 percent slopes.

Additional information about the Nation's natural resources is available on the Natural Resources Conservation Service homepage on the World Wide Web. The address is http://www.nrcs.usda.gov

Contents

How to Use This Survey	i
Foreword	
General Nature of the Survey Area	1
Climate	1
How this Survey Was Made	
Detailed Soil Map Units	
10—Regnier-Rock outcrop-Lacoca complex, 30 to 80 percent slopes	
11—Tucumcari-Hassell clay loams, 0 to 5 percent slopes	
13—Tucumcari-Redona association, 0 to 5 percent slopes	
28—Lacoca-San Jon-Rock outcrop complex, 5 to 20 percent slopes	
31—Chispa-Redona association, 0 to 3 percent slopes	
32—Regnier-Lacoca-Rock outcrop complex, 3 to 25 percent slopes	
36—Alama silt loam, 1 to 5 percent slopes	
37—Ima-Gallen association, 2 to 7 percent slopes	
58—Redona-Armesa association, 0 to 5 percent slopes	
60—Chispa-Armesa-Redona association, 2 to 7 percent slopes	
61—Berwolf-Roswell association, 1 to 15 percent slopes	
AcA—Acuff loam, 0 to 1 percent slopes	
AcB—Acuff loam, 1 to 3 percent slopes	
AfA—Amarillo fine sandy loam, 0 to 1 percent slopes	
AfB—Amarillo fine sandy loam, 1 to 3 percent slopes	
Ans—Amarillo loamy fine sand, 1 to 3 percent slopes	
AvA—Arvana fine sandy loam, 0 to 1 percent slopes	
DRC—Drake soils, 1 to 8 percent slopes	
EsA—Estacado loam, 0 to 1 percent slopes	
EsB—Estacado loam, 1 to 3 percent slopes	
FrA—Friona loam, 0 to 1 percent slopes	
GoB—Gomez loamy fine sand, 0 to 3 percent slopes	
GrA—Grier clay loam, 0 to 2 percent slopes	
KmB—Kimberson gravelly loam, 0 to 3 percent slopes	
LcA—Lazbuddie clay, 0 to 1 percent slopes	
LoA—Lofton clay loam, 0 to 1 percent slopes	
McA—McLean clay, 0 to 1 percent slopes, occasionally ponded	
MsD—Milsand loamy fine sand, 1 to 8 percent slopes	
MsE—Milsand-Arch complex, 1 to 20 percent slopes	
NtC—Nutivoli fine sand, 3 to 8 percent slopes	
NtD—Nutivoli fine sand, 5 to 12 percent slopes	46
OcA—Olton clay loam, 0 to 1 percent slopes	
OcB—Olton clay loam, 1 to 3 percent slopes	48
PcA—Pep clay loam, 0 to 1 percent slopes	
PcB—Pep clay loam, 1 to 3 percent slopes	
PeA—Pep loam, 0 to 1 percent slopes	
PeB—Pep loam, 1 to 3 percent slopes	
PMG—Potter-Mobeetie association, 8 to 45 percent slopes	
PoA—Portales loam, 0 to 1 percent slopes	55
PsA—Posev fine sandy loam, 0 to 1 percent slopes	56

PsB—Posey fine sandy loam, 1 to 3 percent slopes	
PsC—Posey fine sandy loam, 3 to 8 percent slopes	58
RaA—Randall clay, 0 to 1 percent slopes, frequently ponded	59
RcA—Ranco clay, 0 to 1 percent slopes, frequently ponded	
SaA—Slaughter loam, 0 to 2 percent slopes	62
SnC—Spantara fine sand, 1 to 5 percent slopes	63
SpA—Sparenberg clay, 0 to 1 percent slopes, occasionally ponded	
SsA—Sparks loam, 0 to 2 percent slopes	
W—Water	
Prime Farmland	
Use and Management of the Soils	
Interpretive Ratings	
Rating Class Terms	
Numerical Ratings	
Yields Per Acre	
Land Capability Classification	
Rangeland	/ 1
Windbreaks and Environmental Plantings	/3
Recreation	
Engineering	
Building Site Development	
Sanitary Facilities	
Construction Materials	
Water Management	
Hydric Soils	
Soil Properties	
Engineering Index Properties	83
Physical Soil Properties	
Chemical Soil Properties	
Water Features	87
Soil Features	88
Classification of the Soils	91
Soil Series and Their Morphology	92
Acuff Series	
Alama Series	
Amarillo Series	94
Arch Series	
Armesa Series	
Arvana Series	
Berwolf Series	
Bippus Series	
Chispa Series	
Drake Series	
Estacado Series.	
Friona Series	
Gallen Series	
Gomez Series	
Grier Series	
Hassell Series	
Ima Series	
Kimberson Series	114

Lacoca Series	.115
Lazbuddie Series	.116
Lofton Series	.117
McLean Series	.118
Milsand Series	.119
Mobeetie Series	.120
Nutivoli Series	.121
Olton Series	
Pep Series	
Portales Series	
Posey Series	.126
Potter Series	
Ranco Series	.128
Randall Series	.129
Redona Series	
Regnier Series	
Roswell Series	
San Jon Series	
Slaughter Series	
Spantara Series	
Sparenberg Series	
Sparks Series	
Tucumcari Series	
References	.141
Glossary	.143
Tables	.159
Table 1.—Temperature and Precipitation	.160
Table 2.—Freeze Dates in Spring and Fall	
Table 3.—Growing Season	
Table 4.—Acreage and Proportionate Extent of the Soils	
Table 5.—Irrigated and Nonirrigated Yields by Map Unit Component	.163
Table 6.—Rangeland Productivity	
Table 7.—Camp Areas, Picnic Areas, and Playgrounds	
Table 8.—Paths, Trails, and Golf Course Fairways	.177
Table 9.—Dwellings and Small Commercial Buildings	.182
Table 10.—Roads and Streets, Shallow Excavations, and Lawns and	
Landscaping	
Table 11.—Sewage Disposal	
Table 12.—Landfills	
Table 13.—Source of Gravel and Sand	
Table 14.—Source of Reclamation Material, Roadfill, and Topsoil	
Table 15.—Ponds and Embankments	
Table 16.—Engineering Index Properties	
Table 17.—Physical Properties of the Soils	
Table 18.—Chemical Properties of the Soils	
Table 19.—Water Features	
Table 20.—Soil Features	
Table 21.—Taxonomic Classification of the Soils	.262

Issued 2007

Foreword

Soil surveys contain information that affects land use planning in survey areas. They include predictions of soil behavior for selected land uses. The surveys highlight soil limitations, improvements needed to overcome the limitations, and the impact of selected land uses on the environment.

Soil surveys are designed for many different users. Farmers, ranchers, foresters, and agronomists can use the surveys to evaluate the potential of the soil and the management needed for maximum food and fiber production. Planners, community officials, engineers, developers, builders, and home buyers can use the surveys to plan land use, select sites for construction, and identify special practices needed to ensure proper performance. Conservationists, teachers, students, and specialists in recreation, wildlife management, waste disposal, and pollution control can use the surveys to help them understand, protect, and enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. The information in this report is intended to identify soil properties that are used in making various land use or land treatment decisions. Statements made in this report are intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

These and many other soil properties that affect land use are described in this soil survey. The location of each soil is shown on the detailed soil maps. Each soil in the survey area is described, and information on specific uses is given. Help in using this publication and additional information are available at the local office of the Natural Resources Conservation Service or New Mexico Cooperative Extension.

Dennis Alexander State Conservationist Natural Resources Conservation Service

Soil Survey of Curry and Southwest Quay Counties, New Mexico

By Robert A. Hill

Fieldwork by Rusty Dowell, Robert A. Hill, and Ken Scheffe

United States Department of Agriculture, Natural Resources Conservation Service, in cooperation with New Mexico Agricultural Experiment Station

This soil survey updates the survey of Curry County and Southwest Quay Soil Surveys published in 1958 and 1960 respectively (USDA). It provides additional information and has larger maps, which show the soils in greater detail.

General Nature of the Survey Area

This section provides climate information about Curry and Southwest Quay Counties.

Climate

Prepared by the Natural Resources Conservation Service National Water and Climate Center, Portland, Oregon

Thunderstorm days, relative humidity, percent sunshine, and wind information are estimated from a climate station in Clovis. New Mexico.

Table 1 gives data on temperature and precipitation for the survey area as recorded at Clovis in the period 1971 to 2000. Table 2 shows probable dates of the first freeze in fall and the last freeze in spring. Table 3 provides data on the length of the growing season.

In winter, the average temperature is 39.1 degrees F and the average daily minimum temperature is 25.4 degrees. The lowest temperature on record, which occurred at Clovis on February 1, 1951, is -17 degrees. In summer, the average temperature is 75.3 degrees and the average daily maximum temperature is 88.9 degrees. The highest temperature, which occurred at Clovis on June 25, 1990, is 110 degrees.

Growing degree days are shown in Table 1. They are equivalent to "heat units." During the month, growing degree days accumulate by the amount that the average temperature each day exceeds a base temperature (50 degrees F). The normal monthly accumulation is used to schedule single or successive plantings of a crop between the last freeze in spring and the first freeze in fall.

The average annual total precipitation is about 18.65 inches. Of this, about 15.61 inches, or 84 percent, usually falls in April through October. The growing season for most crops falls within this period. The heaviest 1-day rainfall during the period of record was 5.26 inches at Clovis on September 7, 1957. Thunderstorms occur on about 54 days each year, and most occur in July.

The average seasonal snowfall is 14.0 inches. The greatest snow depth at any one time during the period of record was 14 inches recorded on January 30, 1999. On an average, 11 days per year have at least 1 inch of snow on the ground. The heaviest 1-day snowfall on record was 11 inches recorded on November 27, 1923.

The average relative humidity in mid-afternoon is about 41 percent. Humidity is higher at night, and the average at dawn is about 68 percent. The sun shines 78 percent of the time in summer and 68 percent in winter. The prevailing wind is from the southwest. Average wind speed is highest, 14.5 miles per hour, in April.

How This Survey Was Made

This survey was made to provide information about the soils and miscellaneous areas in the survey area. The information includes a description of the soils and miscellaneous areas and their location and a discussion of their suitability, limitations, and management for specified uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They dug many holes to study the soil profile, which is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

The soils and miscellaneous areas in the survey area are in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested

through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Detailed Soil Map Units

The map units delineated on the detailed soil maps in this survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions in this section, along with the maps, can be used to determine the suitability and potential of a unit for specific uses. They also can be used to plan the management needed for those uses.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. The contrasting components are mentioned in the map unit descriptions. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives the principal hazards and limitations to be considered in planning for specific uses.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase

commonly indicates a feature that affects use or management. For example, Acuff Loam, 0 to 1 percent slopes is a phase of the Acuff series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A complex consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Tucumcari-Hassell clay loams, 0 to 5 percent slopes is an example.

An association is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Tucumcari-Redona association, 0 to 5 percent slopes is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Drake soils, 1 to 8 percent slopes, is an undifferentiated group in this survey area.

This survey includes *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Table 4 lists the map units in this survey area. Other tables give properties of the soils and the limitations, capabilities, and potentials for many uses. The Glossary defines many of the terms used in describing the soils.

10—Regnier-Rock outcrop-Lacoca complex, 30 to 80 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Regnier and similar soils: 35 percent

Rock outcrop: 30 percent

Lacoca and similar soils: 20 percent Minor components: 15 percent

Component Descriptions

Regnier soils

Landscape: Breaks Landform: Scarp slopes

Parent material: Colluvium and slope alluvium derived from sandstone and shale

Slope: 30 to 80 percent

Surface fragments: About 2 percent subangular channers

Depth class: Shallow

Depth to restrictive feature: 12 to 20 inches to bedrock, paralithic

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 1.8 inches (very low) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Very high

Calcium carbonate average in horizon of maximum accumulation: About 20 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2 (slightly sodic)

Ecological site: Breaks North Exposure

Potential native vegetation: Black grama, sideoats grama, New Mexico feathergrass,

blue grama, little bluestem

Land capability subclass (nonirrigated): 7e

Typical Profile

A—0 to 3 inches; loam C—3 to 12 inches; clay loam Cr—12 to 60 inches; bedrock

Rock outcrop

Parent material: Sandstone and shale

Depth to restrictive feature: 0 inches to bedrock, lithic

Land capability subclass (nonirrigated): 8s

Lacoca soils

Landscape: Breaks

Landform: Structural benches

Parent material: Alluvium derived from sandstone and/or residuum weathered from

sandstone

Slope: 30 to 50 percent

Surface fragments: About 5 percent subangular channers

Depth class: Very shallow and shallow

Depth to restrictive feature: 4 to 20 inches to bedrock, lithic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 1.1 inches (very low)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very high

Calcium carbonate average in horizon of maximum accumulation: About 18 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)
Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Breaks North Exposure

Potential native vegetation: Blue grama, little bluestem, sideoats grama, New Mexico

feathergrass, sand bluestem

Land capability subclass (nonirrigated): 7s

Typical Profile

A—0 to 8 inches; loam R—8 to 60 inches; bedrock

Minor Components

Redona and similar soils

Composition: About 10 percent

Slope: 0 to 2 percent

Drainage class: Well drained Ecological site: Loamy Berwolf and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy Plains

11—Tucumcari-Hassell clay loams, 0 to 5 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Tucumcari and similar soils: 50 percent Hassell and similar soils: 40 percent Minor components: 10 percent

Component Descriptions

Tucumcari soils

Landscape: Plains Landform: Pediments

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 0 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 11.8 inches (high) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 2 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly sodic)

Ecological site: Clavev

Potential native vegetation: Blue grama, alkali sacaton, tobosa, sideoats grama,

fourwing saltbush

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 5 inches; clay loam Bt—5 to 19 inches; clay loam

Btk—19 to 49 inches; clay loam Bk—49 to 60 inches; clay

Hassell soils

Landscape: Plains Landform: Pediments

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 0 to 5 percent

Depth class: Moderately deep

Depth to restrictive feature: 20 to 40 inches to bedrock, paralithic

Drainage class: Well drained

Slowest permeability: 0.06 to 0.2 in/hr (slow)

Available water capacity: About 5.8 inches (low)

Shrink-swell potential: About 7.5 percent (high)

Runoff class: High

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: About 2 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Clayey

Potential native vegetation: Blue grama, alkali sacaton, tobosa, sideoats grama,

fourwing saltbush

Land capability subclass (nonirrigated): 6c

Typical Profile

A—0 to 4 inches; clay loam Bt1—4 to 22 inches; silty clay Bt2—22 to 32 inches; clay Cr—32 to 60 inches; bedrock

Minor Components

Lacoca and similar soils

Composition: About 10 percent

Slope: 5 to 20 percent

Depth to restrictive feature: 4 to 20 inches to bedrock, lithic

Drainage class: Well drained Ecological site: Clayey

13—Tucumcari-Redona association, 0 to 5 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Tucumcari and similar soils: 50 percent Redona and similar soils: 40 percent Minor components: 10 percent

Component Descriptions

Tucumcari soils

Landscape: Plains Landform: Swales

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 0 to 2 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 11.7 inches (high) Shrink-swell potential: About 4.4 percent (moderate)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 2 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Clayey

Potential native vegetation: Blue grama, alkali sacaton, tobosa, sideoats grama,

fourwing saltbush

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 5 inches; loam Bt—5 to 19 inches; clay loam Btk—19 to 49 inches; clay loam Bk—49 to 60 inches; clay

Redona soils

Landscape: Plains Landform: Pediments

Parent material: Red bed eolian and alluvium derived from sandstone and shale

Slope: 0 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 10.2 inches (high) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: About 2 percent Salinity average in horizon of maximum accumulation: None (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Loamy

Potential native vegetation: Blue grama, sideoats grama, tobosa, black grama, vine

mesquite

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 4 inches; loam

Bt—4 to 23 inches; sandy clay loam

Btk-23 to 60 inches; loam

Minor Components

Gullied land

Composition: About 10 percent

28—Lacoca-San Jon-Rock outcrop complex, 5 to 20 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Lacoca and similar soils: 40 percent San Jon and similar soils: 30 percent

Rock outcrop: 15 percent Minor components: 15 percent

Component Descriptions

Lacoca soils

Landscape: Hills

Landform: Structural benches

Parent material: Alluvium derived from sandstone and/or residuum weathered from

sandstone

Slope: 5 to 20 percent

Surface fragments: About 5 percent subangular channers

Depth class: Very shallow and shallow

Depth to restrictive feature: 4 to 20 inches to bedrock, lithic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 1.3 inches (very low)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sandstone Savannah

Potential native vegetation: Blue grama, sideoats grama, New Mexico feathergrass,

black grama, little bluestem

Land capability subclass (nonirrigated): 7s

Typical Profile

A—0 to 12 inches; cobbly fine sandy loam

R-12 to 60 inches; bedrock

San Jon soils

Landscape: Hills

Landform: Structural benches

Parent material: Red bed eolian and alluvium derived from sandstone and shale

Slope: 5 to 20 percent

Depth class: Moderately deep

Depth to restrictive feature: 20 to 40 inches to bedrock, paralithic

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 4.7 inches (low) Shrink-swell potential: About 4.3 percent (moderate)

Runoff class: High

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Loamy

Potential native vegetation: Blue grama, sideoats grama, tobosa, black grama, vine

mesquite

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 6 inches; loam Bw—6 to 33 inches; clay loam

R—33 to 60 inches; bedrock

Rock outcrop

Parent material: Barren sandstone and shale

Depth to restrictive feature: 0 inches to bedrock, lithic

Land capability subclass (nonirrigated): 8s

Minor Components

Tucumcari and similar soils

Composition: About 8 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Clayey Redona and similar soils

Composition: About 7 percent

Slope: 0 to 1 percent

Drainage class: Well drained Ecological site: Loamy

31—Chispa-Redona association, 0 to 3 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Chispa and similar soils: 50 percent Redona and similar soils: 40 percent Minor components: 10 percent

Component Descriptions

Chispa soils

Landscape: Piedmont slopes

Landform: Low hills

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 0 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 8.2 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 20 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 4 mmhos/cm (very

slightly saline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Sandy Loam

Potential native vegetation: Black grama, blue grama, sand dropseed, sideoats

grama

Land capability subclass (nonirrigated): 6s

Typical Profile

A-0 to 7 inches; fine sandy loam

Bk1 and Bk2—7 to 43 inches; sandy clay loam BCk—43 to 60 inches; sandy clay loam

Redona soils

Landscape: Piedmont slopes

Landform: Alluvial flats

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 0 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 10.2 inches (high) Shrink-swell potential: About 4.3 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 15 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Sandy Loam

Potential native vegetation: Blue grama, little bluestem, sideoats grama, black grama,

dropseed

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 8 inches; fine sandy loam Bt, Btk, Bk—8 to 60 inches; loam

Minor Components

Soils shallow to petrocalcic and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained Ecological site: Shallow

32—Regnier-Lacoca-Rock outcrop complex, 3 to 25 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Regnier and similar soils: 40 percent Lacoca and similar soils: 30 percent

Rock outcrop: 15 percent Minor components: 15 percent

Component Descriptions

Regnier soils

Landscape: Hills Landform: Pediments

Parent material: Colluvium and slope alluvium derived from sandstone and shale

Slope: 3 to 20 percent

Surface fragments: About 2 percent subangular channers

Depth class: Shallow

Depth to restrictive feature: 12 to 20 inches to bedrock, paralithic

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 1.9 inches (very low) Shrink-swell potential: About 3.0 percent (moderate)

Runoff class: High

Calcium carbonate average in horizon of maximum accumulation: About 20 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly sodic)

Ecological site: Red Shale

Potential native vegetation: Alkali sacaton, blue grama, tobosa, buffalograss,

fourwing saltbush

Land capability subclass (nonirrigated): 6c

Typical Profile

A—0 to 8 inches; loam C—8 to 12 inches; clay loam Cr—12 to 60 inches; bedrock

Lacoca soils

Landscape: Hills

Landform: Structural benches

Parent material: Alluvium derived from sandstone and/or residuum weathered from

sandstone

Slope: 10 to 25 percent

Surface fragments: About 8 percent subangular channers

Depth class: Very shallow and shallow

Depth to restrictive feature: 4 to 20 inches to bedrock, lithic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: None.7 inches (very low)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: High

Calcium carbonate average in horizon of maximum accumulation: About 20 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Shallow Sandstone

Potential native vegetation: Blue grama, little bluestem, sideoats grama, New Mexico

feathergrass, black grama

Land capability subclass (nonirrigated): 7s

Typical Profile

A—0 to 5 inches; sandy loam R—5 to 60 inches; bedrock

Rock outcrop

Parent material: Barren or nearly barren sandstone and shale

Depth to restrictive feature: 0 inches to bedrock. lithic

Land capability subclass (nonirrigated): 8s

Minor Components

Redona and similar soils

Composition: About 10 percent

Slope: 0 to 2 percent

Drainage class: Well drained Ecological site: Loamy Tucumcari and similar soils Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Clayey

36—Alama silt loam, 1 to 5 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Alama and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Alama soils

Landscape: Plains Landform: Alluvial flats

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 1 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 11.5 inches (high) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 8 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Loamy

Potential native vegetation: Blue grama, galleta, sideoats grama, black grama, vine

mesquite

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 3 inches; silt loam

Bw1, Bw2, Bw3—3 to 28 inches; silty clay loam

Bk, 2Bk-28 to 60 inches; silt loam

Minor Components

Tucumcari and similar soils

Composition: About 10 percent

Slope: 0 to 2 percent

Drainage class: Well drained Ecological site: Clayey

37—Ima-Gallen association, 2 to 7 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Ima and similar soils: 70 percent Gallen and similar soils: 20 percent Minor components: 10 percent

Component Descriptions

Ima soils

Landscape: Piedmonts Landform: Hillslopes

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 2 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 7.7 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very low

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Sandy Loam

Potential native vegetation: Blue grama, little bluestem, sideoats grama, black grama,

dropseed

Land capability subclass (irrigated): 4e Land capability subclass (nonirrigated): 6c

Typical Profile

A-0 to 12 inches; fine sandy loam

Bw, Bk, C—12 to 60 inches; fine sandy loam

Gallen soils

Landscape: Piedmonts

Landform: Hills

Parent material: Gravelly slope alluvium derived from igneous, metamorphic, and

sedimentary rock Slope: 2 to 7 percent

Surface fragments: About 15 percent subrounded gravel

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 3.5 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 20 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Gravelly

Potential native vegetation: Black grama, blue grama, sideoats grama, New Mexico

feathergrass, sand dropseed

Land capability subclass (nonirrigated): 6s

Typical Profile

A—0 to 5 inches: gravelly sandy loam

Bw-5 to 20 inches; very gravelly sandy loam Bk—20 to 60 inches; extremely gravelly sandy loam

Minor Components

Chispa and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy Loam

Redona and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy Loam

58—Redona-Armesa association, 0 to 5 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Redona and similar soils: 50 percent Armesa and similar soils: 25 percent Minor components: 25 percent

Component Descriptions

Redona soils

Landscape: Plains Landform: Pediments

Parent material: Red bed eolian and alluvium derived from sandstone and shale

Slope: 0 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 10.5 inches (high) Shrink-swell potential: About 4.4 percent (moderate)

Runoff class: Low

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Calcium carbonate average in horizon of maximum accumulation: About 15 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Loamy

Potential native vegetation: Blue grama, sideoats grama, tobosa, black grama, vine

mesquite

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 6 inches; sandy clay loam

Bt, Btk, Bk—6 to 60 inches; sandy clay loam

Armesa soils

Landscape: Plains Landform: Pediments

Parent material: Eolian deposits and alluvium derived from sandstone and shale

Slope: 0 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 8.9 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 55 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Limy

Potential native vegetation: Blue grama, sideoats grama, black grama, hairy grama,

sand dropseed

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 2 inches; sandy clay loam

Bw, Bk1, Bk2, Bk3—2 to 60 inches; sandy clay loam

Minor Components

Tucumcari and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Drainage class: Well drained Ecological site: Clayey Chispa and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Drainage class: Well drained Ecological site: Sandy Loam

Soils shallow to petrocalcic and similar soils

Composition: About 5 percent

Slope: 0 to 5 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained Ecological site: Shallow

60—Chispa-Armesa-Redona association, 2 to 7 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Chispa and similar soils: 40 percent Armesa and similar soils: 30 percent Redona and similar soils: 20 percent Minor components: 10 percent

Component Descriptions

Chispa soils

Landscape: Piedmont slopes

Landform: Low hills

Parent material: Red bed alluvium derived from sandstone and shale

Slope: 2 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 7.9 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 4 mmhos/cm (very

slightly saline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Sandy Loam

Potential native vegetation: Black grama, bush muhly, blue grama, sand dropseed,

sideoats grama

Land capability subclass (nonirrigated): 6s

Typical Profile

A-0 to 7 inches; fine sandy loam

Bk1, Bk2—7 to 32 inches; sandy clay loam BCk—32 to 60 inches; sandy clay loam

Armesa soils

Landscape: Piedmont slopes

Landform: Low hills

Parent material: Eolian deposits and alluvium derived from sandstone and shale

Slope: 2 to 7 percent

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 8.8 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 55 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

(HUHSallile)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly sodic)

Ecological site: Limy

Potential native vegetation: Blue grama, sideoats grama, black grama, hairy grama,

sand dropseed

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 10 inches; fine sandy loam

Bk1, Bk2—10 to 60 inches; sandy clay loam

Redona soils

Landscape: Piedmont slopes

Landform: Pediments

Parent material: Red bed eolian and alluvium derived from sandstone and shale

Slope: 2 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 10.3 inches (high)

Shrink-swell potential: About 4.4 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 15 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly sodic)

Ecological site: Sandy Loam

Potential native vegetation: Blue grama, little bluestem, sideoats grama, black grama,

dropseed

Land capability subclass (irrigated): 4e Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 6 inches; fine sandy loam

Bt, Btk, Bk—6 to 60 inches; sandy clay loam

Minor Components

Soils shallow to petrocalcic and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained Ecological site: Shallow

61—Berwolf-Roswell association, 1 to 15 percent slopes

Map Unit Setting

Major land resource area: 70

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Berwolf and similar soils: 60 percent Roswell and similar soils: 20 percent Minor components: 20 percent

Component Descriptions

Berwolf soils

Landscape: Dune fields Landform: Interdunes

Parent material: Eolian deposits derived from sandstone and shale

Slope: 1 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 7.5 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very low

Calcium carbonate average in horizon of maximum accumulation: About 15 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Sandy Plains

Potential native vegetation: Dropseed, little bluestem, sand bluestem, New Mexico

feathergrass, sand dropseed

Land capability subclass (nonirrigated): 6c

Typical Profile

A—0 to 11 inches; loamy fine sand Bt1, Bt2—11 to 42 inches; sandy loam Bk1, Bk2—42 to 60 inches; fine sandy loam

Roswell soils

Landscape: Dune fields Landform: Dunes

Parent material: Eolian sands derived from sandstone and shale

Slope: 5 to 15 percent Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid) Available water capacity: About 4.6 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very low

Calcium carbonate average in horizon of maximum accumulation: None

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)
Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sandhills

Potential native vegetation: Sand bluestem, dropseed, giant sandreed, little

bluestem, sand sagebrush

Land capability subclass (nonirrigated): 7e

Typical Profile

A—0 to 8 inches; fine sand C—8 to 60 inches; fine sand

Minor Components

Soils shallow to petrocalcic and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained Ecological site: Shallow Berwolf and similar soils

Composition: About 10 percent

Slope: 0 to 5 percent

Drainage class: Well drained Ecological site: Sandy Plains

AcA—Acuff loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Acuff and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Acuff soils

Landscape: Tablelands Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.9 inches (high) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 1 Land capability subclass (nonirrigated): 4c

Typical Profile

Ap1—0 to 9 inches; loam Bt1—9 to 16 inches; clay loam Bt2—16 to 33 inches; clay loam Btk1—33 to 80 inches; clay loam

Minor Components

Estacado and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Olton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

AcB—Acuff loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Acuff and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Acuff soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.9 inches (high) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap1 and Ap2—0 to 7 inches; loam Bt1 and Bt2—7 to 33 inches; clay loam Btk1 and Bk-33 to 80 inches; clay loam

Minor Components

Olton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Estacado and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

AfA—Amarillo fine sandy loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Amarillo and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Amarillo soils

Landscape: Tablelands Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.2 inches (high) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Sandy Loam PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, hairy grama,

little bluestem

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap1—0 to 9 inches; fine sandy loam

Bt1 and Bt2—9 to 42 inches; sandy clay loam

Btk-42 to 80 inches; clay loam

Minor Components

Spantara and similar soils

Composition: About 8 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Gomez and similar soils

Composition: About 7 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

AfB—Amarillo fine sandy loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Amarillo and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Amarillo soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 8.9 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Sandy Loam PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, hairy grama,

little bluestem

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 10 inches; fine sandy loam Bt—10 to 35 inches; sandy clay loam Btk—35 to 80 inches; sandy clay loam

Minor Components

Spantara and similar soils

Composition: About 8 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Gomez and similar soils

Composition: About 7 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

AnB—Amarillo loamy fine sand, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Amarillo and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Amarillo soils

Landscape: Tablelands

Landform: Plains, playa slopes (fig. 1)
Parent material: Loamy eolian deposits

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 8.8 inches (moderate)



Figure 1.—Irrigated grain sorghum on an area of Amarillo loamy fine sand, 1 to 3 percent slopes. The irrigated crop provides wind erosion protection during the growing season and as a residue when left on the surface.

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Sandy PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

sagebrush, sideoats grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 7 inches; loamy fine sand

Bt1 and Bt2—7 to 37 inches; sandy clay loam and loam

Btk-37 to 80 inches; clay loam

Minor Components

Spantara and similar soils

Composition: About 8 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36 Gomez and similar soils

Composition: About 7 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

AvA—Arvana fine sandy loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Arvana and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Arvana soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent

Depth class: Moderately deep

Depth to restrictive feature: 20 to 40 inches to petrocalcic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 4.8 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 2 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2 (slightly sodic)

Ecological site: Sandy Loam PE 25-36

Potential native vegetation: Black grama, blue grama, sideoats grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 6e

Typical Profile

Ap—0 to 8 inches; fine sandy loam Bt1—8 to 17 inches: clay loam

Bt2—17 to 31 inches; sandy clay loam Bkm—31 to 35 inches; cemented material

BCk-35 to 80 inches; clay loam

Minor Components

Amarillo and similar soils

Composition: About 14 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

Milsand and similar soils

Composition: About 1 percent

Slope: 5 to 20 percent

Drainage class: Excessively drained Ecological site: Sand Hills PE 25-36

BcA—Bippus clay loam, 0 to 2 percent slopes, occasionally flooded

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Bippus and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Bippus soils

Landscape: Tablelands Landform: Draws, flood plains Parent material: Loamy alluvium

Slope: 0 to 2 percent

Depth class: Very deep

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 10.8 inches (high) Shrink-swell potential: About 4.1 percent (moderate)

Flooding hazard: Rare—during the months of April to October

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2 (slightly sodic)

Ecological site: Draw PE 25-36

Potential native vegetation: Western wheatgrass, blue grama, galleta, sideoats

grama, vine mesquite

Land capability subclass (irrigated): 2w Land capability subclass (nonirrigated): 4c

Typical Profile

A1, A2—0 to 13 inches; clay loam Bw1—13 to 23 inches; clay loam Bw2—23 to 80 inches; clay loam

Minor Components

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Olton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Portales and similar soils

Composition: About 4 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Randall and similar soils

Composition: About 1 percent

Slope: 0 to 1 percent

Drainage class: Poorly drained Ecological site: Playa PE 25-36

DRC—Drake soils, 1 to 8 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Drake and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Drake soils

Landscape: Tablelands Landform: Dunes

Parent material: Loamy eolian deposits

Slope: 1 to 8 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 7.5 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 16 percent Gypsum average in horizon of maximum accumulation: About 2 percent Salinity average in horizon of maximum accumulation: About 2 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 7 (slightly sodic)

Ecological site: High Lime PE 25-36

Potential native vegetation: Alkali sacaton, black grama, blue grama, fourwing

saltbush, sideoats grama

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 7 inches; loam

Bk1—7 to 28 inches; sandy clay loam

Bk2—28 to 55 inches; loam

Bk3-55 to 80 inches; fine sandy loam

Minor Components

Spantara and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Portales and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

EsA—Estacado loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

The difficulty of the degree of (14.0 to 17.0 degree

Frost-free period: 180 to 200 days

Map Unit Composition

Estacado and similar soils: 90 percent

Minor components: 10 percent

Component Descriptions

Estacado soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 10.8 inches (high)

Shrink-swell potential: About 3.6 percent (moderate)

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 30 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (slightly

sodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap and Ap2—0 to 11 inches; loam Btk1—11 to 20 inches; clay loam Btk2—20 to 80 inches; clay loam

Minor Components

Posey and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

EsB—Estacado loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Estacado and similar soils: 85 percent

Minor components: 15 percent

Component Descriptions

Estacado soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Available water capacity: About 10.7 inches (high) Shrink-swell potential: About 3.5 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 35 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 13 inches; loam

Btk1—13 to 22 inches; clay loam Btk2—22 to 30 inches; clay loam Btk3—30 to 80 inches; clay loam

Minor Components

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Bippus and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Drainage class: Well drained Flooding hazard: Rare

Ecological site: Draw PE 25-36

Kimberson and similar soils Composition: About 5 percent

Slope: 1 to 5 percent

Depth to restrictive feature: 10 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

FrA—Friona loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Friona and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Friona soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent

Depth class: Moderately deep

Depth to restrictive feature: 20 to 40 inches to petrocalcic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 5.4 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 35 percent

Gypsum average in horizon of maximum accumulation: About 2 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1

(slightly sodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap-0 to 6 inches; loam

Bt1, Bt2—6 to 24 inches; clay loam Btk—24 to 30 inches; clay loam

Bkm—30 to 41 inches; cemented material Bk—41 to 80 inches; sandy clay loam

Minor Components

Acuff and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Arvana and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

GoB—Gomez loamy fine sand, 0 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Gomez and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Gomez soils

Landscape: Tablelands Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 6.7 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 3

(slightly sodic)

Ecological site: Sandy PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

sagebrush, sideoats grama Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4e

Typical Profile

A—0 to 12 inches; loamy fine sand Bk1—12 to 20 inches; fine sandy loam

Bk2-20 to 23 inches; loam

Bk3—23 to 47 inches; loamy fine sand C—47 to 80 inches; loamy fine sand

Minor Components

Spantara and similar soils

Composition: About 10 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

GrA—Grier clay loam, 0 to 2 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Grier and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Grier soils

Landscape: Tablelands

Landform: Playa floors, pluvial lakes (relict), basin floors

Parent material: Clayey lacustrine deposits

Slope: 0 to 2 percent Depth class: Very deep

Drainage class: Somewhat poorly drained Slowest permeability: 0.06 to 0.2 in/hr (slow) Available water capacity: About 10.5 inches (high) Shrink-swell potential: About 6.6 percent (high)

Ponding hazard: Frequent—during the months of September and October;

Occasional—during the months of April to August Seasonal high water table depth: About 9 to 36 inches

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 30 percent

Gypsum average in horizon of maximum accumulation: About 1 percent

Salinity average in horizon of maximum accumulation: About 6 mmhos/cm (slightly saline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 15 (moderately sodic)

Ecological site: Wet Saline PE 25-36

Potential native vegetation: Alkali sacaton, mat muhly, inland saltgrass, vine

mesquite, western wheatgrass

Land capability subclass (nonirrigated): 5w

Typical Profile

A-0 to 4 inches; clay loam

Bw1, Bw2-4 to 18 inches; clay loam

Bgk1, Bgk2—18 to 35 inches; sandy clay loam

Bgk3, Bgk4—35 to 80 inches; clay loam

Minor Components

Drake and similar soils

Composition: About 5 percent

Slope: 1 to 9 percent

Drainage class: Well drained Ecological site: High Lime PE 25-36

Portales and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

KmB—Kimberson gravelly loam, 0 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Kimberson and similar soils: 90 percent

Minor components: 10 percent

Component Descriptions

Kimberson soils

Landscape: Tablelands Landform: Plains, low hills

Parent material: Loamy eolian deposits

Slope: 0 to 3 percent Depth class: Shallow

Depth to restrictive feature: 10 to 20 inches to petrocalcic

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 2.0 inches (very low)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 50 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Very Shallow PE 25-36

Potential native vegetation: Black grama, sideoats grama, cane bluestem, hairy

grama, threeawn

Land capability subclass (nonirrigated): 7s

Typical Profile

A1—0 to 5 inches; gravelly loam A2—5 to 14 inches; gravelly loam

Bkm—14 to 20 inches; cemented material BCk—20 to 80 inches; gravelly loam

Minor Components

Pep and similar soils

Composition: About 5 percent

Slope: 1 to 3 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

LcA—Lazbuddie clay, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Lazbuddie and similar soils: 85 percent

Minor components: 15 percent

Component Descriptions

Lazbuddie soils

Landscape: Tablelands Landform: Playa steps

Parent material: Clayey lacustrine deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Moderately well drained Slowest permeability: 0.06 to 0.2 in/hr (slow)

Available water capacity: About 8.9 inches (moderate)

Shrink-swell potential: About 7.5 percent (high)

Ponding hazard: Rare Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 12 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2 (slightly sodic)

Ecological site: Playa PE 25-36

Potential native vegetation: Pennsylvania smartweed, blue grama, buffalograss,

common spikerush, western wheatgrass Land capability subclass (nonirrigated): 5w

Typical Profile

A-0 to 10 inches; clay

Bss1, Bss2—10 to 45 inches; clay Bss3—45 to 80 inches; clay

Minor Components

McLean and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Somewhat poorly drained

Ecological site: Playa PE 25-36

Randall and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Poorly drained Ecological site: Playa PE 25-36

LoA—Lofton clay loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Lofton and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Lofton soils

Landscape: Tablelands Landform: Depressions

Parent material: Clayey eolian deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Moderately well drained Slowest permeability: 0.06 to 0.2 in/hr (slow) Available water capacity: About 10.4 inches (high) Shrink-swell potential: About 5.5 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 28 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 1 Land capability subclass (nonirrigated): 4c

Typical Profile

A—0 to 6 inches; clay loam Bt1, Bt2—6 to 25 inches; silty clay Btk, Bk—25 to 80 inches; clay loam

Minor Components

Olton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Lazbuddie and similar soils Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Somewhat poorly drained

Ecological site: Playa PE 25-36

McLean and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Somewhat poorly drained

Ecological site: Playa PE 25-36

McA—McLean clay, 0 to 1 percent slopes, occasionally ponded

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

McLean and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

McLean soils

Landscape: Tablelands Landform: Playa floors

Parent material: Clayey lacustrine deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Somewhat poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Available water capacity: About 8.5 inches (moderate)

Shrink-swell potential: About 17.0 percent (very high)

Ponding hazard: Occasional—during the months of April to October

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Playa PE 25-36

Potential native vegetation: Pennsylvania smartweed, blue grama, buffalograss,

common spikerush, western wheatgrass Land capability subclass (nonirrigated): 4w

Typical Profile

A-0 to 6 inches; clay

Bss1, Bss2—6 to 41 inches; clay Bkss1—41 to 61 inches; clay Bkss2, Bkss3—61 to 80 inches; clay

Minor Components

Portales and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

MsD—Milsand loamy fine sand, 1 to 8 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,420 feet (1,250 to 1,651 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Milsand and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Milsand soils

Landscape: Tablelands Landform: Dunes

Parent material: Sandy eolian deposits

Slope: 1 to 8 percent Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid) Available water capacity: About 3.0 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very low

Calcium carbonate average in horizon of maximum accumulation: About 3 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sand Hills PE 25-36

Potential native vegetation: Havard's oak, sand bluestem, little bluestem, sand

sagebrush, giant sandreed, sideoats grama, spike dropseed

Land capability subclass (nonirrigated): 6e

Typical Profile

A—0 to 6 inches; loamy fine sand Ck1—6 to 30 inches; loamy fine sand Ck2—30 to 80 inches; fine sand

Minor Components

Arch and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: High Lime PE 25 - 36

Spantara and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Gomez and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

MsE—Milsand-Arch complex, 1 to 20 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Milsand and similar soils: 50 percent Arch and similar soils: 40 percent Minor components: 10 percent

Component Descriptions

Milsand soils

Landscape: Tablelands Landform: Dunes

Parent material: Sandy eolian deposits

Slope: 1 to 20 percent Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid)

Available water capacity: About 2.6 inches (very low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 6 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sand Hills PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

lovegrass, sideoats grama

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 8 inches; fine sand C-8 to 30 inches; fine sand Ab-30 to 37 inches: fine sand Cb-37 to 80 inches; fine sand

Arch soils

Landscape: Tablelands Landform: Interdunes

Parent material: Loamy eolian deposits

Slope: 1 to 10 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 8.5 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 50 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: High Lime PE 25-36

Potential native vegetation: Alkali sacaton, black grama, blue grama, fourwing

saltbush, sideoats grama

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 6 inches; fine sandy loam Bk1—6 to 16 inches; sandy clay loam Bk2—16 to 37 inches; sandy clay loam Bk3—37 to 80 inches; sandy clay loam

Minor Components

Spantara and similar soils

Composition: About 10 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

NtC—Nutivoli fine sand, 3 to 8 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Nutivoli and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Nutivoli soils

Landscape: Tablelands Landform: Dunes (fig. 2) Parent material: Eolian sands

Slope: 3 to 8 percent Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid) Available water capacity: About 4.7 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: None

Gypsum average in horizon of maximum accumulation: None



Figure 2.—Native rangeland on an area of Nutivoli fine sand, 3 to 8 percent slopes. The Nutivoli soils are in the Sand Hills ecological site.

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sand Hills PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

lovegrass, sideoats grama

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 6 inches; fine sand

C1, C2, C3, C4—6 to 80 inches; fine sand

Minor Components

Milsand and similar soils

Composition: About 5 percent

Slope: 5 to 20 percent

Drainage class: Excessively drained Ecological site: Sand Hills PE 25-36

Spantara and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

NtD—Nutivoli fine sand, 5 to 12 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Nutivoli and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Nutivoli soils

Landscape: Tablelands

Landform: Dunes

Parent material: Eolian sands

Slope: 5 to 12 percent Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid) Available water capacity: About 4.4 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: None

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Sand Hills PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

lovegrass, sideoats grama

Land capability subclass (nonirrigated): 6e

Typical Profile

A-0 to 28 inches; fine sand

C1, C2, C3-28 to 80 inches; fine sand

Minor Components

Gomez and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

Milsand and similar soils

Composition: About 5 percent

Slope: 5 to 20 percent

Drainage class: Excessively drained Ecological site: Sand Hills PE 25-36

Amarillo and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

OcA—Olton clay loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Olton and similar soils: 95 percent Minor components: 5 percent

Component Descriptions

Olton soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 11.0 inches (high) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 35 percent Gypsum average in horizon of maximum accumulation: About 2 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 2s Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 6 inches; clay loam Bt—6 to 17 inches; clay

Btk1, Btk2, Btk3—17 to 41 inches; clay loam Btk4, Btk5—41 to 80 inches; clay loam

Minor Components

Slaughter and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

OcB—Olton clay loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Olton and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Olton soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 10.5 inches (high) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 35 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline) Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap1, Ap2—0 to 9 inches; clay loam Bt1, Bt2—9 to 25 inches; clay Btk1—25 to 34 inches; clay loam Btk2—34 to 80 inches; clay loam

Minor Components

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Estacado and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Kimberson and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

PcA—Pep clay loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Pep and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Pep soils

Landscape: Plateaus or tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 7.9 inches (moderate)

Shrink-swell potential: About 3.0 percent (moderate)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, buffalograss, black grama,

hairy grama, sand dropseed, threeawn, vine mesquite

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 10 inches; clay loam Bw1—10 to 16 inches; clay loam Bw2—16 to 32 inches; clay loam Bk—32 to 80 inches; clay loam

Minor Components

Estacado and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Olton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

PcB—Pep clay loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Pep and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Pep soils

Landscape: Plateaus or tablelands Landform: Playa slopes, plains

Parent material: Loamy eolian deposits

Soil Survey of Curry and Southwest Quay Counties, New Mexico

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 7.9 inches (moderate)

Shrink-swell potential: About 3.0 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 25 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, buffalograss, black grama,

hairy grama, sand dropseed, threeawn, vine mesquite

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 9 inches; clay loam Bw1—9 to 15 inches; clay loam Bw2—15 to 31 inches; clay loam Bk—31 to 80 inches; clay loam

Minor Components

Estacado and similar soils

Composition: About 10 percent

Slope: 1 to 3 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Olton and similar soils

Composition: About 5 percent

Slope: 1 to 3 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

PeA—Pep loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Pep and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Pep soils

Landscape: Tablelands Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Available water capacity: About 10.9 inches (high)

Shrink-swell potential: About 4.3 percent (moderate)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 33 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None

(nonsodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap-0 to 7 inches; loam

Bw1, Bw2—7 to 20 inches; clay loam Bk1, Bk2—20 to 80 inches; clay loam

Minor Components

Estacado and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Olton and similar soils

Composition: About 5 percent

Slope: 1 to 3 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

PeB—Pep loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Pep and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Pep soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 10.2 inches (high) Shrink-swell potential: About 3.1 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 33 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1

(slightly sodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

A1, A2—0 to 14 inches; loam Bw—14 to 30 inches; loam

Bk1, Bk2—30 to 80 inches; clay loam

Minor Components

Estacado and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

PMG—Potter-Mobeetie association, 8 to 45 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Potter and similar soils: 45 percent

Mobeetie and similar soils: 35 percent

Minor components: 20 percent

Component Descriptions

Potter soils

Landscape: Breaks

Landform: Ridges, scarp slopes Parent material: Loamy alluvium

Slope: 8 to 30 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 4.2 inches (low) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 65 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2

(slightly sodic)

Ecological site: Very Shallow PE 25-36

Potential native vegetation: Little bluestem, sideoats grama, black grama, blue

grama, New Mexico feathergrass, hairy grama

Land capability subclass (nonirrigated): 7s

Typical Profile

A-0 to 4 inches; loam

Bk—4 to 9 inches: gravelly loam

BCk and C—9 to 80 inches; gravelly loam and extremely cobbly loam

Mobeetie soils

Landscape: Breaks

Landform: Valley sides, scarp slopes Parent material: Loamy colluvium

Slope: 8 to 45 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 6.7 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 13 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Mixedland Slopes PE 25-36

Potential native vegetation: Little bluestem, blue grama, sideoats grama, black

grama. New Mexico feathergrass, hairy grama

Land capability subclass (nonirrigated): 7e

Typical Profile

A—0 to 12 inches; fine sandy loam
Bw—12 to 16 inches; fine sandy loam
Bk1, Bk2—16 to 80 inches; fine sandy loam

Minor Components

Bippus and similar soils

Composition: About 10 percent

Slope: 0 to 2 percent

Drainage class: Well drained Flooding hazard: Rare

Ecological site: Draw PE 25-36

Kimberson and similar soils

Composition: About 5 percent

Slope: 1 to 5 percent

Depth to restrictive feature: 10 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

Estacado and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

PoA—Portales loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Portales and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Portales soils

Landscape: Tablelands Landform: Plains, playa steps

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 10.9 inches (high) Shrink-swell potential: About 3.9 percent (moderate)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 28 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

A—0 to 15 inches; loam

Bk1—15 to 35 inches; clay loam

Bk2, Bk3, Bk4—35 to 80 inches; loam and clay loam

Minor Components

Acuff and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

PsA—Posey fine sandy loam, 0 to 1 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Posey and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Posey soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 1 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.6 inches (high) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: About 1 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap1, Ap2—0 to 11 inches; fine sandy loam Btk1—11 to 17 inches; sandy clay loam Btk2—17 to 42 inches; sandy clay loam Btk3—42 to 80 inches; sandy clay loam

Minor Components

Amarillo and similar soils

Composition: About 5 percent

Slope: 1 to 3 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

Estacado and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Limy Upland PE 25-36

Gomez and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

PsB—Posey fine sandy loam, 1 to 3 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Posey and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Posey soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 1 to 3 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.7 inches (high) Shrink-swell potential: About 1.5 percent (low) Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: About 3 percent Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 2

(slightly sodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4c

Typical Profile

Ap—0 to 6 inches; fine sandy loam Btk1—6 to 13 inches; clay loam Btk2—13 to 52 inches; clay loam Btk3—52 to 80 inches; clay loam

Minor Components

Amarillo and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

PsC—Posey fine sandy loam, 3 to 8 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Posey and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Posey soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Slope: 3 to 8 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate) Available water capacity: About 9.5 inches (high) Shrink-swell potential: About 1.5 percent (low)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 40 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Limy Upland PE 25-36

Potential native vegetation: Blue grama, sideoats grama, black grama, buffalograss,

hairy grama

Land capability subclass (irrigated): 4e Land capability subclass (nonirrigated): 4e

Typical Profile

A—0 to 12 inches; fine sandy loam Btk1—12 to 22 inches; clay loam Btk2—22 to 38 inches; clay loam Btk3—38 to 80 inches; sandy clay loam

Minor Components

Amarillo and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Sandy Loam PE 25-36

Kimberson and similar soils Composition: About 5 percent

Slope: 1 to 5 percent

Depth to restrictive feature: 10 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

RaA—Randall clay, 0 to 1 percent slopes, frequently ponded

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Randall and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Randall soils

Landscape: Tablelands Landform: Playa floors (fig. 3)

Parent material: Clayey lacustrine deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow) Available water capacity: About 8.2 inches (moderate) Shrink-swell potential: About 18.0 percent (very high)



Figure 3.—This playa lake is in an area of Randall clay, 0 to 1 percent slopes, frequently ponded. The large playa lakes provide seasonal habitat for migratory waterfowl.

Ponding hazard: Frequent—during months of April to October

Seasonal high water table depth: None to 6 inches during the months of May, June, September, and October; 12 to 18 inches during the months of April, May, and November

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 10 percent Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Playa PE 25-36

Potential native vegetation: Pennsylvania smartweed, blue grama, buffalograss,

common spikerush, western wheatgrass Land capability subclass (nonirrigated): 6w

Typical Profile

A1, A2—0 to 17 inches; clay Bss1—17 to 28 inches; clay Bss2, Bss3—28 to 80 inches; clay

Minor Components

60

Lofton and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Moderately well drained Ecological site: Deep Hardland PE 25-36

McLean and similar soils

Composition: About 5 percent

Drainage class: Somewhat poorly drained

Ecological site: Playa PE 25-36

RcA—Ranco clay, 0 to 1 percent slopes, frequently ponded

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Ranco and similar soils: 90 percent Minor components: 10 percent

Component Descriptions

Ranco soils

Landscape: Tablelands Landform: Playa floors

Parent material: Clayey lacustrine deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow) Available water capacity: About 7.9 inches (moderate) Shrink-swell potential: About 17.0 percent (very high)

Ponding hazard: Frequent—during months of April to October

Seasonal high water table depth: None to 6 inches during the months of May, June, September, and October; 12 to 18 inches during the months of April, May, and November

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm (nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Playa PE 25-36

Potential native vegetation: Pennsylvania smartweed, blue grama, buffalograss,

common spikerush, western wheatgrass Land capability subclass (nonirrigated): 6w

Typical Profile

A—0 to 5 inches; clay Bw—5 to 12 inches; clay

Bss1, Bss2—12 to 80 inches; clay

Minor Components

Sparenberg and similar soils Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Moderately well drained

Ecological site: Playa PE 25-36

SaA—Slaughter loam, 0 to 2 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Slaughter and similar soils: 85 percent

Minor components: 15 percent

Component Descriptions

Slaughter soils

Landscape: Tablelands Landform: Plains, low hills

Parent material: Loamy eolian deposits

Slope: 0 to 2 percent

Depth class: Very shallow and shallow

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow) Available water capacity: About 3.2 inches (low) Shrink-swell potential: About 4.5 percent (moderate)

Runoff class: Medium

Calcium carbonate average in horizon of maximum accumulation: About 35 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 2 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: About 1 (slightly sodic)

Ecological site: Very Shallow PE 25-36

Potential native vegetation: Black grama, sideoats grama, cane bluestem, hairy

grama, threeawn

Land capability subclass (irrigated): 4s Land capability subclass (nonirrigated): 6s

Typical Profile

A-0 to 6 inches: loam

Bt1, Bt2—6 to 18 inches; clay loam Bkm—18 to 30 inches; cemented material BCk—30 to 80 inches; sandy clay loam

Minor Components

Sparks and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Friona and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Depth to restrictive feature: 20 to 40 inches to petrocalcic

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

SnC—Spantara fine sand, 1 to 5 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Spantara and similar soils: 85 percent

Minor components: 15 percent

Component Descriptions

Spantara soils

Landscape: Tablelands

Landform: Plains, playa slopes

Parent material: Coarse-loamy eolian deposits

Slope: 1 to 5 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid) Available water capacity: About 6.8 inches (moderate)

Shrink-swell potential: About 1.5 percent (low)

Runoff class: Very low

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: None (nonsaline)
Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Sandy PE 25-36

Potential native vegetation: Little bluestem, sand bluestem, sand dropseed, sand

sagebrush, sideoats grama

Land capability subclass (irrigated): 3e Land capability subclass (nonirrigated): 4e

Typical Profile

A1, A2—0 to 10 inches; fine sand

Bt1, Bt2, Bt3, Bt4—10 to 45 inches; fine sand, loamy fine sand, fine sandy loam

Bt5—45 to 80 inches; loamy fine sand

Minor Components

Nutivoli and similar soils

Composition: About 10 percent

Slope: 1 to 9 percent

Drainage class: Excessively drained Ecological site: Sand Hills PE 25-36

Gomez and similar soils

Composition: About 5 percent

Slope: 0 to 3 percent

Drainage class: Well drained Ecological site: Sandy PE 25-36

SpA—Sparenberg clay, 0 to 1 percent slopes, occasionally ponded

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Sparenberg and similar soils: 90 percent

Minor components: 10 percent

Component Descriptions

Sparenberg soils

Landscape: Tablelands Landform: Playa floors

Parent material: Clayey lacustrine deposits

Slope: 0 to 1 percent Depth class: Very deep

Drainage class: Somewhat poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Available water capacity: About 7.9 inches (moderate)

Shrink-swell potential: About 17.0 percent (very high)

Ponding hazard: Occasional—during months of April to October

Runoff class: Negligible

Calcium carbonate average in horizon of maximum accumulation: About 10 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Playa PE 25-36

Potential native vegetation: Pennsylvania smartweed, blue grama, buffalograss,

common spikerush, western wheatgrass Land capability subclass (nonirrigated): 4w

Typical Profile

A—0 to 4 inches; clay Bw—4 to 12 inches; clay Bss—12 to 46 inches; clay Bkss—46 to 80 inches; clay

Minor Components

Lofton and similar soils

Composition: About 10 percent

Slope: 0 to 1 percent

Drainage class: Moderately well drained Ecological site: Deep Hardland PE 25-36

SsA—Sparks loam, 0 to 2 percent slopes

Map Unit Setting

Major land resource area: 77

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Frost-free period: 180 to 200 days

Map Unit Composition

Sparks and similar soils: 85 percent Minor components: 15 percent

Component Descriptions

Sparks soils

Landscape: Tablelands

Landform: Plains

Parent material: Loamy eolian deposits

Slope: 0 to 2 percent Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.06 to 0.2 in/hr (slow)

Available water capacity: About 11.3 inches (high)

Shrink-swell potential: About 4.4 percent (moderate)

Runoff class: Low

Calcium carbonate average in horizon of maximum accumulation: About 15 percent

Gypsum average in horizon of maximum accumulation: None

Salinity average in horizon of maximum accumulation: About 1 mmhos/cm

(nonsaline)

Sodium adsorption ratio average in horizon of maximum accumulation: None (nonsodic)

Ecological site: Deep Hardland PE 25-36

Potential native vegetation: Blue grama, buffalograss, galleta, sideoats grama,

western wheatgrass

Land capability subclass (irrigated): 2e Land capability subclass (nonirrigated): 4c

Typical Profile

A—0 to 6 inches; loam Bt1—6 to 18 inches; clay

Bt2, Btk-18 to 80 inches; clay loam

Minor Components

Acuff and similar soils

Composition: About 5 percent

Slope: 0 to 1 percent

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Friona and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Depth to restrictive feature: 20 to 40 inches to petrocalcic

Drainage class: Well drained

Ecological site: Deep Hardland PE 25-36

Slaughter and similar soils

Composition: About 5 percent

Slope: 0 to 2 percent

Depth to restrictive feature: 9 to 20 inches to petrocalcic

Drainage class: Well drained

Ecological site: Very Shallow PE 25-36

W-Water

This map unit consists of areas of natural or constructed bodies of surface water. No interpretations are assigned to this map unit.

Prime Farmland

The list below lists the map units in the survey area that are considered prime farmland. This list does not constitute a recommendation for a particular land use.

In an effort to identify the extent and location of prime farmland, the Natural Resources Conservation Service, in cooperation with other interested Federal, State, and local government organizations, has inventoried land that can be used for the production of the Nation's food supply.

Prime farmland (fig. 4) is of major importance in meeting the Nation's short- and long-range needs for food and fiber. Because the supply of high-quality farmland is limited, the U.S. Department of Agriculture recognizes that responsible levels of government, as well as individuals, should encourage and facilitate the wise use of our Nation's prime farmland.

Prime farmland, as defined by the U.S. Department of Agriculture, is land that has the best combination of physical and chemical characteristics for producing food, feed, forage, fiber, and oilseed crops and is available for these uses. It could be cultivated land, pastureland, forestland, or other land, but it is not urban or built-up land or water areas. The soil quality, growing season, and moisture supply are those needed for the soil to economically produce sustained high yields of crops when proper management, including water management, and acceptable farming methods are applied. In general, prime farmland has an adequate and dependable supply of



Figure 4.—Center pivot irrigation on an area of Acuff loam, 0 to 1 percent slopes. This soil is classified as Prime Farmland when irrigated.

moisture from precipitation or irrigation, a favorable temperature and growing season, acceptable acidity or alkalinity, an acceptable salt and sodium content, and few or no rocks. The water supply is dependable and of adequate quality. Prime farmland is permeable to water and air. It is not excessively erodible or saturated with water for long periods, and it either is not frequently flooded during the growing season or is protected from flooding. Slope ranges mainly from 0 to 5 percent. More detailed information about the criteria for prime farmland is available at the local office of the Natural Resources Conservation Service.

A recent trend in land use in some areas has been the loss of some prime farmland to industrial and urban uses. The loss of prime farmland to other uses puts pressure on marginal lands, which generally are more erodible, droughty, and less productive and cannot be easily cultivated.

For some soils identified in the list as prime farmland, measures that overcome a hazard or limitation, such as flooding, wetness, and droughtiness, are needed. Onsite evaluation is needed to determine whether or not the hazard or limitation has been overcome by corrective measures.

AcA—Acuff loam, 0 to 1 percent slopes AcB—Acuff loam, 1 to 3 percent slopes FrA—Friona loam, 0 to 1 percent slopes LoA—Lofton clay loam, 0 to 1 percent slopes OcA—Olton clay loam, 0 to 1 percent slopes OcB—Olton clay loam, 1 to 3 percent slopes SsA—Sparks loam, 0 to 2 percent slopes Prime Farmland when irrigated Prime Farmland when irrigated

Use and Management of the Soils

This soil survey is an inventory and evaluation of the soils in the survey area. It can be used to adjust land uses to the limitations and potentials of natural resources and the environment. Also, it can help to prevent soil-related failures in land uses.

In preparing a soil survey, soil scientists, conservationists, engineers, and others collect extensive field data about the nature and behavioral characteristics of the soils. They collect data on erosion, droughtiness, flooding, and other factors that affect various soil uses and management. Field experience and collected data on soil properties and performance are used as a basis in predicting soil behavior.

Information in this section can be used to plan the use and management of soils for crops and pasture; as rangeland and forestland; as sites for buildings, sanitary facilities, highways and other transportation systems, and parks and other recreational facilities; and for wildlife habitat. It can be used to identify the potentials and limitations of each soil for specific land uses and to help prevent construction failures caused by unfavorable soil properties.

Planners and others using soil survey information can evaluate the effect of specific land uses on productivity and on the environment in all or part of the survey area. The survey can help planners to maintain or create a land use pattern in harmony with the natural soil.

Contractors can use this survey to locate sources of sand and gravel, roadfill, and topsoil. They can use it to identify areas where bedrock, wetness, or very firm soil layers can cause difficulty in excavation.

Health officials, highway officials, engineers, and others may also find this survey useful. The survey can help them plan the safe disposal of wastes and locate sites for pavements, sidewalks, campgrounds, playgrounds, lawns, and trees and shrubs.

Interpretive Ratings

The interpretive tables in this survey rate the soils in the survey area for various uses. Many of the tables identify the limitations that affect specified uses and indicate the severity of those limitations. The ratings in these tables are both verbal and numerical.

Rating Class Terms

Rating classes are expressed in the tables in terms that indicate the extent to which the soils are limited by all of the soil features that affect a specified use or in terms that indicate the suitability of the soils for the use. Thus, the tables may show limitation classes or suitability classes. Terms for the limitation classes are *not limited*, *somewhat limited*, and *very limited*. The suitability ratings are expressed as *well suited*, *moderately suited*, *poorly suited*, and *unsuited* or as *good*, *fair*, and *poor*.

Numerical Ratings

Numerical ratings in the tables indicate the relative severity of individual limitations. The ratings are shown as decimal fractions ranging from 0.00 to 1.00. They indicate gradations between the point at which a soil feature has the greatest negative impact on the use and the point at which the soil feature is not a limitation.

The limitations appear in order from the most limiting to the least limiting. Thus, if more than one limitation is identified, the most severe limitation is listed first and the least severe one is listed last.

Yields Per Acre

The average yields per acre that can be expected of the principal crops under a high level of management are shown in Table 5. In any given year, yields may be higher or lower than those indicated in the table because of variations in rainfall and other climatic factors. The land capability classification of map units in the survey area also is shown in the table.

The yields are based mainly on the experience and records of farmers, conservationists, and extension agents. Available yield data from nearby counties and results of field trials and demonstrations also are considered.

The management needed to obtain the indicated yields of the various crops depends on the kind of soil and the crop. Management can include drainage, erosion control, and protection from flooding; the proper planting and seeding rates; suitable high-yielding crop varieties; appropriate and timely tillage; control of weeds, plant diseases, and harmful insects; favorable soil reaction and optimum levels of nitrogen, phosphorus, potassium, and trace elements for each crop; effective use of crop residue, barnyard manure, and green manure crops; and harvesting that ensures the smallest possible loss.

For yields of irrigated crops, it is assumed that the irrigation system is adapted to the soils and to the crops grown, that good-quality irrigation water is uniformly applied as needed, and that tillage is kept to a minimum.

The estimated yields reflect the productive capacity of each soil for each of the principal crops. Yields are likely to increase as new production technology is developed. The productivity of a given soil compared with that of other soils, however, is not likely to change.

Crops other than those shown in Table 5 are grown in the survey area, but estimated yields are not listed because the acreage of such crops is small. The local office of the Natural Resources Conservation Service or the New Mexico Cooperative Extension can provide information about the management and productivity of the soils for those crops. Other information is available on the Internet at http://soils.usda.gov.

Land Capability Classification

Land capability classification shows, in a general way, the suitability of soils for most kinds of field crops. Crops that require special management are excluded. The soils are grouped according to their limitations for field crops, the risk of damage if they are used for crops, and the way they respond to management. The criteria used in grouping the soils do not include major and generally expensive landforming that would change slope, depth, or other characteristics of the soils, nor do they include possible but unlikely major reclamation projects. Capability classification is not a substitute for interpretations designed to show suitability and limitations of groups of soils for rangeland, for forestland, or for engineering purposes.

In the capability system, soils are generally grouped at three levels—capability class, subclass, and unit. (18)

Capability classes, the broadest groups, are designated by the numbers 1 through 8. The numbers indicate progressively greater limitations and narrower choices for practical use. The classes are defined as follows:

Class 1 soils have slight limitations that restrict their use.

Class 2 soils have moderate limitations that restrict the choice of plants or that require moderate conservation practices.

Class 3 soils have severe limitations that restrict the choice of plants or that require special conservation practices, or both.

Class 4 soils have very severe limitations that restrict the choice of plants or that require very careful management, or both.

Class 5 soils are subject to little or no erosion but have other limitations, impractical to remove, that restrict their use mainly to pasture, rangeland, forestland, or wildlife habitat.

Class 6 soils have severe limitations that make them generally unsuitable for cultivation and that restrict their use mainly to pasture, rangeland, forestland, or wildlife habitat.

Class 7 soils have very severe limitations that make them unsuitable for cultivation and that restrict their use mainly to grazing, forestland, or wildlife habitat.

Class 8 soils and miscellaneous areas have limitations that preclude commercial plant production and that restrict their use to recreational purposes, wildlife habitat, watershed, or esthetic purposes.

Capability subclasses are soil groups within one class. They are designated by adding a small letter, e, w, s, or c, to the class numeral, for example, 2e. The letter e shows that the main hazard is the risk of erosion unless close-growing plant cover is maintained; w shows that water in or on the soil interferes with plant growth or cultivation (in some soils the wetness can be partly corrected by artificial drainage); s shows that the soil is limited mainly because it is shallow, droughty, or stony; and c, used in only some parts of the United States, shows that the chief limitation is climate that is very cold or very dry.

In class 1 there are no subclasses because the soils of this class have few limitations. Class 5 contains only the subclasses indicated by *w*, *s*, or *c* because the soils in class 5 are subject to little or no erosion. They have other limitations that restrict their use to pasture, rangeland, forestland, wildlife habitat, or recreation.

Capability units are soil groups within a subclass. The soils in a capability unit are enough alike to be suited to the same crops and pasture plants, to require similar management, and to have similar productivity. Capability units are generally designated by adding an Arabic numeral to the subclass symbol, for example, 2e-4 and 3e-6. These units are not given in all soil surveys.

Rangeland

In areas that have similar climate and topography, differences in the kind and amount of vegetation produced on rangeland are closely related to the kind of soil. Effective management is based on the relationship between the soils and vegetation and water.

Table 6 shows, for each soil that supports rangeland vegetation, the ecological site and the potential annual production of vegetation in favorable, normal, and unfavorable years. An explanation of the column headings in the table follows.

An *ecological site* is the product of all the environmental factors responsible for its development. It has characteristic soils that have developed over time throughout the soil development process; a characteristic hydrology, particularly infiltration and runoff that has developed over time; and a characteristic plant community (kind and amount of vegetation). The hydrology of a site is influenced by development of the soil and plant community. The vegetation, soils, and hydrology are all interrelated. Each is influenced by the others and influences the development of the others. The plant community on an ecological site is typified by an association of species that differs from that of other ecological sites in the kind and/or proportion of species or in total production. Descriptions of ecological sites are provided in the Field Office Technical Guide, which is available in local offices of the Natural Resources Conservation Service or on the Internet at http://soils.usda.gov.



Figure 5.—Native rangeland on an area of Acuff loam, 0 to 1 percent slopes. The Acuff soils are in the Deep Hardland ecological site.

Total dry-weight production is the amount of vegetation that can be expected to grow annually on well managed rangeland that is supporting the potential natural plant community. It includes all vegetation, whether or not it is palatable to grazing animals. It includes the current year's growth of leaves, twigs, and fruits of woody plants. It does not include the increase in stem diameter of trees and shrubs. It is expressed in pounds per acre of air-dry vegetation for favorable, normal, and unfavorable years. In a favorable year, the amount and distribution of precipitation and the temperatures make growing conditions substantially better than average. In a normal year, growing conditions are about average. In an unfavorable year, growing conditions are well below average, generally because of low available soil moisture. Yields are adjusted to a common percent of air-dry moisture content.

Range management requires a knowledge of the kinds of soil and of the potential natural plant community. It also requires an evaluation of the present range similarity index and rangeland trend. Range similarity index is determined by comparing the present plant community with the potential natural plant community on a particular rangeland ecological site. The more closely the existing community resembles the potential community, the higher the range similarity index. Rangeland trend is defined as the direction of change in an existing plant community relative to the potential natural plant community. Further information about the range similarity index and rangeland trend is available in the "National Range and Pasture Handbook," (16), available in local offices of the Natural Resources Conservation Service or on the Internet at http://soils.usda.gov.

The objective in range management is to control grazing so that the plants growing on a site are about the same in kind and amount as the potential natural plant community for that site. Such management generally results in the optimum production of vegetation, control of undesirable brush species, conservation of water, and control of erosion. Sometimes, however, an area with a range similarity index somewhat below the potential meets grazing needs, provides wildlife habitat, and protects soil and water resources.

Windbreaks and Environmental Plantings

Windbreaks protect livestock, buildings, yards, fruit trees, gardens, and cropland from wind and snow; help to keep snow on fields; and provide food and cover for wildlife. Field windbreaks are narrow plantings made at right angles to the prevailing wind and at specific intervals across the field. The interval depends on the erodibility of the soil.

Environmental plantings help to beautify and screen houses and other buildings and to abate noise. The plants, mostly evergreen shrubs and trees, are closely spaced. To ensure plant survival, a healthy planting stock of suitable species should be planted properly on a well prepared site and maintained in good condition.

Additional information on planning windbreaks, screens, and planting and caring for trees and shrubs can be obtained from the local office of the Natural Resources Conservation Service, the New Mexico Cooperative Extension, a commercial nursery, or on the Internet at http://soils.usda.gov.

Recreation

The soils of the survey area are rated in Table 7 and Table 8 according to limitations that affect their suitability for recreation. The ratings are both verbal and numerical. Rating class terms indicate the extent to which the soils are limited by all of the soil features that affect the recreational uses. *Not limited* indicates that the soil has features that are very favorable for the specified use. Good performance and very low maintenance can be expected. *Somewhat limited* indicates that the soil has features that are moderately favorable for the specified use. The limitations can be overcome or minimized by special planning, design, or installation. Fair performance and moderate maintenance can be expected. *Very limited* indicates that the soil has one or more features that are unfavorable for the specified use. The limitations generally cannot be overcome without major soil reclamation, special design, or expensive installation procedures. Poor performance and high maintenance can be expected.

Numerical ratings in the tables indicate the severity of individual limitations. The ratings are shown as decimal fractions ranging from 00.01 to 1.00. They indicate gradations between the point at which a soil feature has the greatest negative impact on the use (1.00) and the point at which the soil feature is not a limitation (0.00).

The ratings in the tables are based on restrictive soil features, such as wetness, slope, and texture of the surface layer. Susceptibility to flooding is considered. Not considered in the ratings, but important in evaluating a site, are the location and accessibility of the area, the size and shape of the area and its scenic quality, vegetation, access to water, potential water impoundment sites, and access to public sewer lines. The capacity of the soil to absorb septic tank effluent and the ability of the soil to support vegetation also are important. Soils that are subject to flooding are limited for recreational uses by the duration and intensity of flooding and the season when flooding occurs. In planning recreational facilities, onsite assessment of the height, duration, intensity, and frequency of flooding is essential.

The information in Table 7 and Table 8 can be supplemented by other information in this survey, for example, interpretations for building site development, construction materials, sanitary facilities, and water management.

Camp areas require site preparation, such as shaping and leveling the tent and parking areas, stabilizing roads and intensively used areas, and installing sanitary facilities and utility lines. Camp areas are subject to heavy foot traffic and some vehicular traffic. The ratings are based on the soil properties that affect the ease of developing camp areas and the performance of the areas after development. Slope, stoniness, and depth to bedrock or a cemented pan are the main concerns affecting

the development of camp areas. The soil properties that affect the performance of the areas after development are those that influence trafficability and promote the growth of vegetation, especially in heavily used areas. For good trafficability, the surface of camp areas should absorb rainfall readily, remain firm under heavy foot traffic, and not be dusty when dry. The soil properties that influence trafficability are texture of the surface layer, depth to a water table, ponding, flooding, permeability, and large stones. The soil properties that affect the growth of plants are depth to bedrock or a cemented pan, permeability, and toxic substances in the soil.

Picnic areas are subject to heavy foot traffic. Most vehicular traffic is confined to access roads and parking areas. The ratings are based on the soil properties that affect the ease of developing picnic areas and that influence trafficability and the growth of vegetation after development. Slope and stoniness are the main concerns affecting the development of picnic areas. For good trafficability, the surface of picnic areas should absorb rainfall readily, remain firm under heavy foot traffic, and not be dusty when dry. The soil properties that influence trafficability are texture of the surface layer, depth to a water table, ponding, flooding, permeability, and large stones. The soil properties that affect the growth of plants are depth to bedrock or a cemented pan, permeability, and toxic substances in the soil.

Playgrounds require soils that are nearly level, are free of stones, and can withstand intensive foot traffic. The ratings are based on the soil properties that affect the ease of developing playgrounds and that influence trafficability and the growth of vegetation after development. Slope and stoniness are the main concerns affecting the development of playgrounds. For good trafficability, the surface of the playgrounds should absorb rainfall readily, remain firm under heavy foot traffic, and not be dusty when dry. The soil properties that influence trafficability are texture of the surface layer, depth to a water table, ponding, flooding, permeability, and large stones. The soil properties that affect the growth of plants are depth to bedrock or a cemented pan, permeability, and toxic substances in the soil.

Paths and trails for hiking and horseback riding should require little or no slope modification through cutting and filling. The ratings are based on the soil properties that affect trafficability and erodibility. These properties are stoniness, depth to a water table, ponding, flooding, slope, and texture of the surface layer.

Off-road motorcycle trails require little or no site preparation. They are not covered with surfacing material or vegetation. Considerable compaction of the soil material is likely. The ratings are based on the soil properties that influence erodibility, trafficability, dustiness, and the ease of revegetation. These properties are stoniness, slope, depth to a seasonal high water table, ponding, flooding, and texture of the surface layer.

Golf course fairways are subject to heavy foot traffic and some light vehicular traffic. Cutting or filling may be required. Irrigation is not considered in the ratings. The ratings are based on the soil properties that affect plant growth and trafficability after vegetation is established. The properties that affect plant growth are reaction; depth to a water table; ponding; depth to bedrock or a cemented pan; the available water capacity in the upper 40 inches; the content of salts, sodium, or calcium carbonate; and sulfidic materials. The properties that affect trafficability are flooding, In areas that have similar climate and topography, differences in the kind and amount of vegetation produced on rangeland are closely related to the kind of soil. Effective management is based on the relationship between the soils and vegetation and water.

Engineering

This section provides information for planning land uses related to urban development and to water management. Soils are rated for various uses, and the most limiting features are identified. Ratings are given for building site development, sanitary facilities, construction materials, and water management. The ratings are based on observed performance of the soils and on the data in the tables described under the heading "Soil Properties."

Information in this section is intended for land use planning, for evaluating land use alternatives, and for planning site investigations prior to design and construction. The information, however, has limitations. For example, estimates and other data generally apply only to that part of the soil between the surface and a depth of 5 to 7 feet. Because of the map scale, small areas of different soils may be included within the mapped areas of a specific soil.

The information is not site specific and does not eliminate the need for onsite investigation of the soils or for testing and analysis by personnel experienced in the design and construction of engineering works.

Government ordinances and regulations that restrict certain land uses or impose specific design criteria were not considered in preparing the information in this section. Local ordinances and regulations should be considered in planning, in site selection, and in design.

Soil properties, site features, and observed performance were considered in determining the ratings in this section. During the fieldwork for this soil survey, determinations were made about particle-size distribution, liquid limit, plasticity index, soil reaction, depth to bedrock, hardness of bedrock within 5 to 7 feet of the surface, soil wetness, depth to a water table, ponding, slope, likelihood of flooding, natural soil structure aggregation, and soil density. Data were collected about kinds of clay minerals, mineralogy of the sand and silt fractions, and the kinds of adsorbed cations. Estimates were made for erodibility, permeability, corrosivity, shrink-swell potential, available water capacity, and other behavioral characteristics affecting engineering uses.

This information can be used to evaluate the potential of areas for residential, commercial, industrial, and recreational uses; make preliminary estimates of construction conditions; evaluate alternative routes for roads, streets, highways, pipelines, and underground cables; evaluate alternative sites for sanitary landfills, septic tank absorption fields, and sewage lagoons; plan detailed onsite investigations of soils and geology; locate potential sources of gravel, sand, earthfill, and topsoil; plan drainage systems, irrigation systems, ponds, terraces, and other structures for soil and water conservation; and predict performance of proposed small structures and pavements by comparing the performance of existing similar structures on the same or similar soils.

The information in the tables, along with the soil maps, the soil descriptions, and other data provided in this survey, can be used to make additional interpretations.

Some of the terms used in this soil survey have a special meaning in soil science and are defined in the Glossary.

Building Site Development

Soil properties influence the development of building sites, including the selection of the site, the design of the structure, construction, performance after construction, and maintenance. Table 9 and Table 10 shows the degree and kind of soil limitations that affect dwellings with and without basements, small commercial buildings, local roads and streets, shallow excavations, and lawns and landscaping.

Rating class terms indicate the extent to which the soils are limited by all of the soil features that affect building site development. *Not limited* indicates that the soil

has features that are very favorable for the specified use. Good performance and very low maintenance can be expected. *Somewhat limited* indicates that the soil has features that are moderately favorable for the specified use. The limitations can be overcome or minimized by special planning, design, or installation. Fair performance and moderate maintenance can be expected. *Very limited* indicates that the soil has one or more features that are unfavorable for the specified use. The limitations generally cannot be overcome without major soil reclamation, special design, or expensive installation procedures. Poor performance and high maintenance can be expected.

Numerical ratings in the tables indicate the severity of individual limitations. The ratings are shown as decimal fractions ranging from 00.01 to 1.00. They indicate gradations between the point at which a soil feature has the greatest negative impact on the use (1.00) and the point at which the soil feature is not a limitation (0.00).

Dwellings are single-family houses of three stories or less. For dwellings without basements, the foundation is assumed to consist of spread footings of reinforced concrete built on undisturbed soil at a depth of 2 feet or at the depth of maximum frost penetration, whichever is deeper. For dwellings with basements, the foundation is assumed to consist of spread footings of reinforced concrete built on undisturbed soil at a depth of about 7 feet. The ratings for dwellings are based on the soil properties that affect the capacity of the soil to support a load without movement and on the properties that affect excavation and construction costs. The properties that affect the load-supporting capacity include depth to a water table, ponding, flooding, subsidence, linear extensibility (shrink-swell potential), and compressibility. Compressibility is inferred from the Unified classification. The properties that affect the ease and amount of excavation include depth to a water table, ponding, flooding, slope, depth to bedrock or a cemented pan, hardness of bedrock or a cemented pan, and the amount and size of rock fragments.

Small commercial buildings are structures that are less than three stories high and do not have basements. The foundation is assumed to consist of spread footings of reinforced concrete built on undisturbed soil at a depth of 2 feet or at the depth of maximum frost penetration, whichever is deeper. The ratings are based on the soil properties that affect the capacity of the soil to support a load without movement and on the properties that affect excavation and construction costs. The properties that affect the load-supporting capacity include depth to a water table, ponding, flooding, subsidence, linear extensibility (shrink-swell potential), and compressibility (which is inferred from the Unified classification). The properties that affect the ease and amount of excavation include flooding, depth to a water table, ponding, slope, depth to bedrock or a cemented pan, hardness of bedrock or a cemented pan, and the amount and size of rock fragments.

Local roads and streets have an all-weather surface and carry automobile and light truck traffic all year. They have a subgrade of cut or fill soil material; a base of gravel, crushed rock, or soil material stabilized by lime or cement; and a surface of flexible material (asphalt), rigid material (concrete), or gravel with a binder. The ratings are based on the soil properties that affect the ease of excavation and grading and the traffic-supporting capacity. The properties that affect the ease of excavation and grading are depth to bedrock or a cemented pan, hardness of bedrock or a cemented pan, depth to a water table, ponding, flooding, the amount of large stones, and slope. The properties that affect the traffic-supporting capacity are soil strength (as inferred from the AASHTO group index number), subsidence, linear extensibility (shrink-swell potential), the potential for frost action, depth to a water table, and ponding.

Shallow excavations are trenches or holes dug to a maximum depth of 5 or 6 feet for graves, utility lines, open ditches, or other purposes. The ratings are based on the soil properties that influence the ease of digging and the resistance to sloughing.

Depth to bedrock or a cemented pan, hardness of bedrock or a cemented pan, the amount of large stones, and dense layers influence the ease of digging, filling, and compacting. Depth to the seasonal high water table, flooding, and ponding may restrict the period when excavations can be made. Slope influences the ease of using machinery. Soil texture, depth to the water table, and linear extensibility (shrink-swell potential) influence the resistance to sloughing.

Lawns and landscaping require soils on which turf and ornamental trees and shrubs can be established and maintained. Irrigation is not considered in the ratings. The ratings are based on the soil properties that affect plant growth and trafficability after vegetation is established. The properties that affect plant growth are reaction; depth to a water table; ponding; depth to bedrock or a cemented pan; the available water capacity in the upper 40 inches; the content of salts, sodium, or calcium carbonate; and sulfidic materials. The properties that affect trafficability are flooding, depth to a water table, ponding, slope, stoniness, and the amount of sand, clay, or organic matter in the surface layer.

Sanitary Facilities

Table 11 and Table 12 shows the degree and kind of soil limitations that affect septic tank absorption fields, sewage lagoons, sanitary landfills, and daily cover for landfill. The ratings are both verbal and numerical. Rating class terms indicate the extent to which the soils are limited by all of the soil features that affect these uses. *Not limited* indicates that the soil has features that are very favorable for the specified use. Good performance and very low maintenance can be expected. *Somewhat limited* indicates that the soil has features that are moderately favorable for the specified use. The limitations can be overcome or minimized by special planning, design, or installation. Fair performance and moderate maintenance can be expected. *Very limited* indicates that the soil has one or more features that are unfavorable for the specified use. The limitations generally cannot be overcome without major soil reclamation, special design, or expensive installation procedures. Poor performance and high maintenance can be expected.

Numerical ratings in the tables indicate the severity of individual limitations. The ratings are shown as decimal fractions ranging from 00.01 to 1.00. They indicate gradations between the point at which a soil feature has the greatest negative impact on the use (1.00) and the point at which the soil feature is not a limitation (0.00).

Septic tank absorption fields are areas in which effluent from a septic tank is distributed into the soil through subsurface tiles or perforated pipe. Only that part of the soil between depths of 24 and 60 inches is evaluated. The ratings are based on the soil properties that affect absorption of the effluent, construction and maintenance of the system, and public health. Permeability, depth to a water table, ponding, depth to bedrock or a cemented pan, and flooding affect absorption of the effluent. Stones and boulders, ice, and bedrock or a cemented pan interfere with installation. Subsidence interferes with installation and maintenance. Excessive slope may cause lateral seepage and surfacing of the effluent in down slope areas.

Some soils are underlain by loose sand and gravel or fractured bedrock at a depth of less than 4 feet below the distribution lines. In these soils the absorption field may not adequately filter the effluent, particularly when the system is new. As a result, the ground water may become contaminated.

Sewage lagoons are shallow ponds constructed to hold sewage while aerobic bacteria decompose the solid and liquid wastes. Lagoons should have a nearly level floor surrounded by cut slopes or embankments of compacted soil. Nearly impervious soil material for the lagoon floor and sides is required to minimize seepage and contamination of ground water. Considered in the ratings are slope, permeability, depth to a water table, ponding, depth to bedrock or a cemented pan, flooding, large stones, and content of organic matter.

Soil permeability is a critical property affecting the suitability for sewage lagoons. Most porous soils eventually become sealed when they are used as sites for sewage lagoons. Until sealing occurs, however, the hazard of pollution is severe. Soils that have a permeability rate of more than 2 inches per hour are too porous for the proper functioning of sewage lagoons. In these soils, seepage of the effluent can result in contamination of the ground water. Ground-water contamination is also a hazard if fractured bedrock is within a depth of 40 inches, if the water table is high enough to raise the level of sewage in the lagoon, or if floodwater overtops the lagoon.

A high content of organic matter is detrimental to proper functioning of the lagoon because it inhibits aerobic activity. Slope, bedrock, and cemented pans can cause construction problems, and large stones can hinder compaction of the lagoon floor. If the lagoon is to be uniformly deep throughout, the slope must be gentle enough and the soil material must be thick enough over bedrock or a cemented pan to make land smoothing practical.

A trench sanitary landfill is an area where solid waste is placed in successive layers in an excavated trench. The waste is spread, compacted, and covered daily with a thin layer of soil excavated at the site. When the trench is full, a final cover of soil material at least 2 feet thick is placed over the landfill. The ratings in the table are based on the soil properties that affect the risk of pollution, the ease of excavation, trafficability, and revegetation. These properties include permeability, depth to bedrock or a cemented pan, depth to a water table, ponding, slope, flooding, texture, stones and boulders, highly organic layers, soil reaction, and content of salts and sodium. Unless otherwise stated, the ratings apply only to that part of the soil within a depth of about 6 feet. For deeper trenches, onsite investigation may be needed.

Hard, nonrippable bedrock, creviced bedrock, or highly permeable strata in or directly below the proposed trench bottom can affect the ease of excavation and the hazard of ground-water pollution. Slope affects construction of the trenches and the movement of surface water around the landfill. It also affects the construction and performance of roads in areas of the landfill.

Soil texture and consistence affect the ease with which the trench is dug and the ease with which the soil can be used as daily or final cover. They determine the workability of the soil when dry and when wet. Soils that are plastic and sticky when wet are difficult to excavate, grade, or compact and are difficult to place as a uniformly thick cover over a layer of refuse.

The soil material used as the final cover for a trench landfill should be suitable for plants. It should not have excess sodium or salts and should not be too acid. The surface layer generally has the best workability, the highest content of organic matter, and the best potential for plants. Material from the surface layer should be stockpiled for use as the final cover.

In an area sanitary landfill, solid waste is placed in successive layers on the surface of the soil. The waste is spread, compacted, and covered daily with a thin layer of soil from a source away from the site. A final cover of soil material at least 2 feet thick is placed over the completed landfill. The ratings in the table are based on the soil properties that affect trafficability and the risk of pollution. These properties include flooding, permeability, depth to a water table, ponding, slope, and depth to bedrock or a cemented pan.

Flooding is a serious problem because it can result in pollution in areas downstream from the landfill. If permeability is too rapid or if fractured bedrock, a fractured cemented pan, or the water table is close to the surface, the leachate can contaminate the water supply. Slope is a consideration because of the extra grading required to maintain roads in the steeper areas of the landfill. Also, leachate may flow along the surface of the soils in the steeper areas and cause difficult seepage problems.

Daily cover for landfill is the soil material that is used to cover compacted solid waste in an area sanitary landfill. The soil material is obtained offsite, transported to the landfill, and spread over the waste. The ratings in the table also apply to the final cover for a landfill. They are based on the soil properties that affect workability, the ease of digging, and the ease of moving and spreading the material over the refuse daily during wet and dry periods. These properties include soil texture, depth to a water table, ponding, rock fragments, slope, depth to bedrock or a cemented pan, reaction, and content of salts, sodium, or lime.

Loamy or silty soils that are free of large stones and excess gravel are the best cover for a landfill. Clayey soils may be sticky and difficult to spread; sandy soils are subject to wind erosion.

Slope affects the ease of excavation and of moving the cover material. Also, it can influence runoff, erosion, and reclamation of the borrow area.

After soil material has been removed, the soil material remaining in the borrow area must be thick enough over bedrock, a cemented pan, or the water table to permit revegetation. The soil material used as the final cover for a landfill should be suitable for plants. It should not have excess sodium, salts, or lime and should not be too acid.

Construction Materials

Table 13 and Table 14 provides information about the soils as potential sources of gravel, sand, topsoil, reclamation material, and roadfill. Normal compaction, minor processing, and other standard construction practices are assumed.

Sand and gravel are natural aggregates suitable for commercial use with a minimum of processing. They are used in many kinds of construction. Specifications for each use vary widely. In table 13, only the likelihood of finding material in suitable quantity is evaluated. The suitability of the material for specific purposes is not evaluated, nor are factors that affect excavation of the material. The properties used to evaluate the soil as a source of sand or gravel are gradation of grain sizes (as indicated by the Unified classification of the soil), the thickness of suitable material, and the content of rock fragments. If the bottom layer of the soil contains sand or gravel, the soil is considered a likely source regardless of thickness. The assumption is that the sand or gravel layer below the depth of observation exceeds the minimum thickness.

The soils are rated *good, fair*, or *poor* as potential sources of sand and gravel. A rating of good or fair means that the source material is likely to be in or below the soil. The bottom layer and the thickest layer of the soils are assigned numerical ratings. These ratings indicate the likelihood that the layer is a source of sand or gravel. The number 0.00 indicates that the layer is a good source. A number between 0.00 and 1.00 indicates the degree to which the layer is a likely source.

The soils are rated *good, fair*, or *poor* as potential sources of topsoil, reclamation material, and roadfill. The features that limit the soils as sources of these materials are specified in the tables. The numerical ratings given after the specified features indicate the degree to which the features limit the soils as sources of topsoil, reclamation material, or roadfill. The lower the number, the greater the limitation.

Topsoil is used to cover an area so that vegetation can be established and maintained. The upper 40 inches of a soil is evaluated for use as topsoil. Also evaluated is the reclamation potential of the borrow area. The ratings are based on the soil properties that affect plant growth; the ease of excavating, loading, and spreading the material; and reclamation of the borrow area. Toxic substances, soil reaction, and the properties that are inferred from soil texture, such as available water capacity and fertility, affect plant growth. The ease of excavating, loading, and spreading is affected by rock fragments, slope, depth to a water table, soil texture,

and thickness of suitable material. Reclamation of the borrow area is affected by slope, depth to a water table, rock fragments, depth to bedrock or a cemented pan, and toxic material.

The surface layer of most soils is generally preferred for topsoil because of its organic matter content. Organic matter greatly increases the absorption and retention of moisture and nutrients for plant growth.

Reclamation material is used in areas that have been drastically disturbed by surface mining or similar activities. When these areas are reclaimed, layers of soil material or unconsolidated geological material, or both, are replaced in a vertical sequence. The reconstructed soil favors plant growth. The ratings in the table do not apply to quarries and other mined areas that require an offsite source of reconstruction material. The ratings are based on the soil properties that affect erosion and stability of the surface and the productive potential of the reconstructed soil. These properties include the content of sodium, salts, and calcium carbonate; reaction; available water capacity; erodibility; texture; content of rock fragments; and content of organic matter and other features that affect fertility.

Roadfill is soil material that is excavated in one place and used in road embankments in another place. In this table, the soils are rated as a source of roadfill for low embankments, generally less than 6 feet high and less exacting in design than higher embankments.

The ratings are for the whole soil, from the surface to a depth of about 5 feet. It is assumed that soil layers will be mixed when the soil material is excavated and spread.

The ratings are based on the amount of suitable material and on soil properties that affect the ease of excavation and the performance of the material after it is in place. The thickness of the suitable material is a major consideration. The ease of excavation is affected by large stones, depth to a water table, and slope. How well the soil performs in place after it has been compacted and drained is determined by its strength (as inferred from the AASHTO classification of the soil) and linear extensibility (shrink-swell potential).

Water Management

Table 15 provides information on the soil properties and site features that affect water management. The degree and kind of soil limitations are given for pond reservoir areas; embankments, dikes, and levees; and aquifer-fed excavated ponds. The ratings are both verbal and numerical. Rating class terms indicate the extent to which the soils are limited by all of the soil features that affect these uses. *Not limited* indicates that the soil has features that are very favorable for the specified use. Good performance and very low maintenance can be expected. *Somewhat limited* indicates that the soil has features that are moderately favorable for the specified use. The limitations can be overcome or minimized by special planning, design, or installation. Fair performance and moderate maintenance can be expected. *Very limited* indicates that the soil has one or more features that are unfavorable for the specified use. The limitations generally cannot be overcome without major soil reclamation, special design, or expensive installation procedures. Poor performance and high maintenance can be expected.

Numerical ratings in the tables indicate the severity of individual limitations. The ratings are shown as decimal fractions ranging from 00.01 to 1.00. They indicate gradations between the point at which a soil feature has the greatest negative impact on the use (1.00) and the point at which the soil feature is not a limitation (0.00).

Pond reservoir areas hold water behind a dam or embankment. Soils best suited to this use have low seepage potential in the upper 60 inches. The seepage potential is determined by the permeability of the soil and the depth to fractured bedrock or

other permeable material. Excessive slope can affect the storage capacity of the reservoir area.

Embankments, dikes, and levees are raised structures of soil material, generally less than 20 feet high, constructed to impound water or to protect land against overflow. Embankments that have zoned construction (core and shell) are not considered. In this table, the soils are rated as a source of material for embankment fill. The ratings apply to the soil material below the surface layer to a depth of about 5 feet. It is assumed that soil layers will be uniformly mixed and compacted during construction.

The ratings do not indicate the ability of the natural soil to support an embankment. Soil properties to a depth even greater than the height of the embankment can affect performance and safety of the embankment. Generally, deeper onsite investigation is needed to determine these properties.

Soil material in embankments must be resistant to seepage, piping, and erosion and have favorable compaction characteristics. Unfavorable features include less than 5 feet of suitable material and a high content of stones or boulders, organic matter, or salts or sodium. A high water table affects the amount of usable material. It also affects trafficability.

Aquifer-fed excavated ponds are pits or dugouts that extend to a ground-water aquifer or to a depth below a permanent water table. Excluded are ponds that are fed only by surface runoff and embankment ponds that impound water 3 feet or more above the original surface. Excavated ponds are affected by depth to a permanent water table, permeability of the aquifer, and quality of the water as inferred from the salinity of the soil. Depth to bedrock and the content of large stones affect the ease of excavation.

Hydric Soils

The list below lists the map unit components that are rated as hydric soils in the survey area. This list can help in planning land uses; however, onsite investigation is recommended to determine the hydric soils on a specific site. (6,7)

The three essential characteristics of wetlands are hydrophytic vegetation, hydric soils, and wetland hydrology. (3,7,14,15) Criteria for all of the characteristics must be met for areas to be identified as wetlands. Undrained hydric soils that have natural vegetation should support a dominant population of ecological wetland plant species. Hydric soils that have been converted to other uses should be capable of being restored to wetlands.

Hydric soils are defined by the National Technical Committee for Hydric Soils (NTCHS) as soils that formed under conditions of saturation, flooding, or ponding long enough during the growing season to develop anaerobic conditions in the upper part. (4) These soils, under natural conditions, are either saturated or inundated long enough during the growing season to support the growth and reproduction of hydrophytic vegetation.

The NTCHS definition identifies general soil properties that are associated with wetness. In order to determine whether a specific soil is a hydric soil or nonhydric soil, however, more specific information, such as information about the depth and duration of the water table, is needed. Thus, criteria that identify those estimated soil properties unique to hydric soils have been established. (5) These criteria are used to identify map unit components that normally are associated with wetlands. The criteria used are selected estimated soil properties that are described in "Soil Taxonomy" (13) and "Keys to Soil Taxonomy" (11) and in the "Soil Survey Manual." (9)

If soils are wet enough for a long enough period of time to be considered hydric, they should exhibit certain properties that can be easily observed in the field. These visible properties are indicators of hydric soils. The indicators used to make onsite

determinations of hydric soils are specified in "Field Indicators of Hydric Soils in the United States." (6)

Hydric soils are identified by examining and describing the soil to a depth of about 20 inches. This depth may be greater if determination of an appropriate indicator so requires. It is always recommended that soils be excavated and described to the depth necessary for an understanding of the redoximorphic processes. Then, using the completed soil descriptions, soil scientists can compare the soil features required by each indicator and specify which indicators have been matched with the conditions observed in the soil. The soil can be identified as a hydric soil if at least one of the approved indicators is present.

Map units that are dominantly made up of hydric soils may have small areas, or inclusions, of nonhydric soils in the higher positions on the landform, and map units dominantly made up of nonhydric soils may have inclusions of hydric soils in the lower positions on the landform.

The criteria for hydric soils are represented by codes in the table (for example, 2B3). Definitions for the codes are as follows:

- All Histels except for Folistels, and Histosols except for Folists.
- Soils in Aquic suborders, great groups, or subgroups, Albolls suborder, Historthels great group, Histoturbels great group, Pachic subgroups, or Cumulic subgroups that:
 - are somewhat poorly drained and have a water table at the surface (0.0 feet) during the growing season, or
 - o are poorly drained or very poorly drained and have either:
 - a water table at the surface (0.0 feet) during the growing season if textures are coarse sand, sand, or fine sand in all layers within a depth of 20 inches, or
 - a water table at a depth of 0.5 foot or less during the growing season if permeability is equal to or greater than 6.0 in/hr in all layers within a depth of 20 inches, or
 - a water table at a depth of 1.0 foot or less during the growing season if permeability is less than 6.0 in/hr in any layer within a depth of 20 inches.
- Soils that are frequently ponded for long or very long duration during the growing season.
- Soils that are frequently flooded for long or very long duration during the growing season.

GrA Grier clay loam, 0 to 2 percent slopes

RaA Randall clay, 0 to 1 percent slopes, frequently ponded

RcA Ranco clay, 0 to 1 percent slopes, frequently ponded

Soil Properties

Data relating to soil properties are collected during the course of the soil survey. Soil properties are ascertained by field examination of the soils and by laboratory index testing of some benchmark soils. Established standard procedures are followed. During the survey, many shallow borings are made and examined to identify and classify the soils and to delineate them on the soil maps. Samples are taken from some typical profiles and tested in the laboratory to determine particle-size distribution, plasticity, and compaction characteristics.

Estimates of soil properties are based on field examinations, on laboratory tests of samples from the survey area, and on laboratory tests of samples of similar soils in nearby areas. Tests verify field observations, verify properties that cannot be estimated accurately by field observation, and help to characterize key soils.

The estimates of soil properties are shown in tables. They include physical and chemical properties, and clay mineralogy.

Engineering Index Properties

Table 16 provides the engineering classifications and the range of index properties for the layers of each soil in the survey area.

Depth to the upper and lower boundaries of each layer is indicated.

Texture is given in the standard terms used by the U.S. Department of Agriculture. These terms are defined according to percentages of sand, silt, and clay in the fraction of the soil that is less than 2 millimeters across. "Loam," for example, is soil that is 7 to 27 percent clay, 28 to 50 percent silt, and less than 52 percent sand. If the content of particles coarser than sand is 15 percent or more, an appropriate modifier is added, for example, "gravelly." Textural terms are defined in the Glossary.

Classification of the soils is determined according to the Unified soil classification system (2) and the system adopted by the American Association of State Highway and Transportation Officials. (1)

The Unified system classifies soils according to properties that affect their use as construction material. Soils are classified according to particle-size distribution of the fraction less than 3 inches across and according to plasticity index, liquid limit, and organic matter content. Sandy and gravelly soils are identified as GW, GP, GM, GC, SW, SP, SM, and SC; silty and clayey soils as ML, CL, OL, MH, CH, and OH; and highly organic soils as PT. Soils exhibiting engineering properties of two groups can have a dual classification, for example, CL-ML.

The AASHTO system classifies soils according to those properties that affect roadway construction and maintenance. In this system, the fraction of a mineral soil that is less than 3 inches across is classified in one of seven groups from A-1 through A-7 on the basis of particle-size distribution, liquid limit, and plasticity index. Soils in group A-1 are coarse grained and low in content of fines (silt and clay). At the other extreme, soils in group A-7 are fine grained. Highly organic soils are classified in group A-8 on the basis of visual inspection.

If laboratory data are available, the A-1, A-2, and A-7 groups are further classified as A-1-a, A-1-b, A-2-4, A-2-5, A-2-6, A-2-7, A-7-5, or A-7-6. As an additional refinement, the suitability of a soil as subgrade material can be indicated by a group index number. Group index numbers range from 0 for the best subgrade material to 20 or higher for the poorest.

Rock fragments larger than 10 inches across and 3 to 10 inches across are indicated as a percentage of the total soil on a dry-weight basis. The percentages are estimates determined mainly by converting volume percentage in the field to weight percentage.

Percentage (of soil particles) passing designated sieves is the percentage of the soil fraction less than 3 inches across based on an ovendry weight. The sieves, numbers 4, 10, 40, and 200 (USA Standard Series), have openings of 4.76, 2.00, 0.420, and 0.074 millimeters, respectively. Estimates are based on laboratory tests of soils sampled in the survey area and in nearby areas and on estimates made in the field.

Liquid limit and plasticity index (Atterberg limits) indicate the plasticity characteristics of a soil. The estimates are based on test data from the survey area or from nearby areas and on field examination.

The estimates of particle-size distribution, liquid limit, and plasticity index are generally rounded to the nearest 5 percent. Thus, if the ranges of gradation and Atterberg limits extend a marginal amount (1 or 2 percentage points) across classification boundaries, the classification in the marginal zone is generally omitted in the table.

Physical Soil Properties

Table 17 shows estimates of some physical characteristics and features that affect soil behavior. These estimates are given for the layers of each soil in the survey area. The estimates are based on field observations and on test data for these and similar soils.

Depth to the upper and lower boundaries of each layer is indicated.

Particle size is the effective diameter of a soil particle as measured by sedimentation, sieving, or micrometric methods. Particle sizes are expressed as classes with specific effective diameter class limits. The broad classes are sand, silt, and clay, ranging from the larger to the smaller.

Clay as a soil separate consists of mineral soil particles that are less than 0.002 millimeter in diameter. In table 17, the estimated clay content of each soil layer is given as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter.

The clay content affects the physical behavior of a soil. Particle size is important for engineering and agronomic interpretations, for determination of soil hydrologic qualities, and for soil classification.

The amount and kind of clay affect the fertility and physical condition of the soil and the ability of the soil to adsorb cations and to retain moisture. They influence shrink-swell potential, permeability, plasticity, the ease of soil dispersion, and other soil properties. The amount and kind of clay in a soil also affect tillage and earthmoving operations.

Moist bulk density is the weight of soil (ovendry) per unit volume. Volume is measured when the soil is at field moisture capacity, that is, the moisture content at 1/3- or 1/10-bar (33kPa or 10kPa) moisture tension. Weight is determined after the soil is dried at 105 degrees C. In the table, the estimated moist bulk density of each soil horizon is expressed in grams per cubic centimeter of soil material that is less than 2 millimeters in diameter. Bulk density data are used to compute shrink-swell potential, available water capacity, total pore space, and other soil properties. The moist bulk density of a soil indicates the pore space available for water and roots. Depending on soil texture, a bulk density of more than 1.4 can restrict water storage and root penetration. Moist bulk density is influenced by texture, kind of clay, content of organic matter, and soil structure.

Permeability (K-sat) refers to the ability of a soil to transmit water or air. The term "permeability," as used in soil surveys, indicates saturated hydraulic conductivity (K-

sat). The estimates in the table indicate the rate of water movement, in inches per hour, when the soil is saturated. They are based on soil characteristics observed in the field, particularly structure, porosity, and texture. Permeability is considered in the design of soil drainage systems and septic tank absorption fields.

Available water capacity refers to the quantity of water that the soil is capable of storing for use by plants. The capacity for water storage is given in inches of water per inch of soil for each soil layer. The capacity varies, depending on soil properties that affect retention of water. The most important properties are the content of organic matter, soil texture, bulk density, and soil structure. Available water capacity is an important factor in the choice of plants or crops to be grown and in the design and management of irrigation systems. Available water capacity is not an estimate of the quantity of water actually available to plants at any given time.

Linear extensibility refers to the change in length of an unconfined clod as moisture content is decreased from a moist to a dry state. It is an expression of the volume change between the water content of the clod at 1/3- or 1/10-bar tension (33kPa or 10kPa tension) and oven dryness. The volume change is reported in the table as percent change for the whole soil. Volume change is influenced by the amount and type of clay minerals in the soil.

Linear extensibility is used to determine the shrink-swell potential of soils. The shrink-swell potential is low if the soil has a linear extensibility of less than 3 percent; moderate if 3 to 6 percent; high if 6 to 9 percent; and very high if more than 9 percent. If the linear extensibility is more than 3, shrinking and swelling can cause damage to buildings, roads, and other structures and to plant roots. Special design commonly is needed.

Organic matter is the plant and animal residue in the soil at various stages of decomposition. In table 17, the estimated content of organic matter is expressed as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter.

The content of organic matter in a soil can be maintained by returning crop residue to the soil. Organic matter has a positive effect on available water capacity, water infiltration, soil organism activity, and tilth. It is a source of nitrogen and other nutrients for crops and soil organisms.

Erosion factors are shown in table 17 as the K factor (Kw and Kf) and the T factor. Erosion factor K indicates the susceptibility of a soil to sheet and rill erosion by water. Factor K is one of several factors used in the Universal Soil Loss Equation (USLE) and the Revised Universal Soil Loss Equation (RUSLE) to predict the average annual rate of soil loss by sheet and rill erosion in tons per acre per year. The estimates are based primarily on percentage of silt, sand, and organic matter and on soil structure and permeability. Values of K range from 0.02 to 0.69. Other factors being equal, the higher the value, the more susceptible the soil is to sheet and rill erosion by water.

Erosion factor Kw indicates the erodibility of the whole soil. The estimates are modified by the presence of rock fragments.

Erosion factor Kf indicates the erodibility of the fine-earth fraction, or the material less than 2 millimeters in size.

Erosion factor T is an estimate of the maximum average annual rate of soil erosion by wind or water that can occur without affecting crop productivity over a sustained period. The rate is in tons per acre per year.

Wind erodibility groups are made up of soils that have similar properties affecting their susceptibility to wind erosion in cultivated areas. The soils assigned to group 1 are the most susceptible to wind erosion, and those assigned to group 8 are the least susceptible. The groups are as follows:

- 1. Coarse sands, sands, fine sands, and very fine sands.
- 2. Loamy coarse sands, loamy sands, loamy fine sands, loamy very fine sands, ash material, and sapric soil material.

- 3. Coarse sandy loams, sandy loams, fine sandy loams, and very fine sandy loams.
 - 4L. Calcareous loams, silt loams, clay loams, and silty clay loams.
- 4. Clays, silty clays, noncalcareous clay loams, and silty clay loams that are more than 35 percent clay.
- 5. Noncalcareous loams and silt loams that are less than 20 percent clay and sandy clay loams, sandy clays, and hemic soil material.
- 6. Noncalcareous loams and silt loams that are more than 20 percent clay and noncalcareous clay loams that are less than 35 percent clay.
- 7. Silts, noncalcareous silty clay loams that are less than 35 percent clay, and fibric soil material.
- 8. Soils that are not subject to wind erosion because of rock fragments on the surface or because of surface wetness.

Wind erodibility index is a numerical value indicating the susceptibility of soil to wind erosion, or the tons per acre per year that can be expected to be lost to wind erosion. There is a close correlation between wind erosion and the texture of the surface layer, the size and durability of surface clods, rock fragments, organic matter, and a calcareous reaction. Soil moisture and frozen soil layers also influence wind erosion.

Chemical Soil Properties

Table 18 shows estimates of some chemical characteristics and features that affect soil behavior. These estimates are given for the layers of each soil in the survey area. The estimates are based on field observations and on test data for these and similar soils.

Depth to the upper and lower boundaries of each layer is indicated.

Cation-exchange capacity is the total amount of extractable bases that can be held by the soil, expressed in terms of milliequivalents per 100 grams of soil at neutrality (pH 7.0) or at some other stated pH value. Soils having a low cation-exchange capacity hold fewer cations and may require more frequent applications of fertilizer than soils having a high cation-exchange capacity. The ability to retain cations reduces the hazard of ground-water pollution.

Soil reaction is a measure of acidity or alkalinity. The pH of each soil horizon is based on many field tests. For many soils, values have been verified by laboratory analyses. Soil reaction is important in selecting crops and other plants, in evaluating soil amendments for fertility and stabilization, and in determining the risk of corrosion.

Calcium carbonate equivalent is the percent of carbonates, by weight, in the fraction of the soil less than 2 millimeters in size. The availability of plant nutrients is influenced by the amount of carbonates in the soil. Incorporating nitrogen fertilizer into calcareous soils helps to prevent nitrite accumulation and ammonium-N volatilization.

Gypsum is expressed as a percent, by weight, of hydrated calcium sulfates in the fraction of the soil less than 20 millimeters in size. Gypsum is partially soluble in water. Soils that have a high content of gypsum may collapse if the gypsum is removed by percolating water.

Salinity is a measure of soluble salts in the soil at saturation. It is expressed as the electrical conductivity of the saturation extract, in millimhos per centimeter (mmhos/cm) or decisiemens per meter (dS/m) at 25 degrees C Estimates are based on field and laboratory measurements at representative sites of nonirrigated soils. The salinity of irrigated soils is affected by the quality of the irrigation water and by the frequency of water application. Hence, the salinity of soils in individual fields can differ greatly from the value given in the table. Salinity affects the suitability of a soil for crop production, the stability of soil if used as construction material, and the potential of the soil to corrode metal and concrete.

Sodium adsorption ratio (SAR) is a measure of the amount of sodium (Na) relative to calcium (Ca) and magnesium (Mg) in the water extract from saturated soil paste. It is the ratio of the Na concentration divided by the square root of one-half of the Ca + Mg concentration. Soils that have SAR values of 13 or more may be characterized by an increased dispersion of organic matter and clay particles, reduced permeability and aeration, and a general degradation of soil structure.

Water Features

Table 19 gives estimates of various water features. The estimates are used in land use planning that involves engineering considerations.

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The four hydrologic soil groups are:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

The *months* in the table indicate the portion of the year in which the feature is most likely to be a concern.

Water table refers to a saturated zone in the soil. Table 19 indicates, by month, depth to the top (*upper limit*) and base (*lower limit*) of the saturated zone in most years. Estimates of the upper and lower limits are based mainly on observations of the water table at selected sites and on evidence of a saturated zone, namely grayish colors or mottles (redoximorphic features) in the soil. A saturated zone that lasts for less than a month is not considered a water table.

Ponding is standing water in a closed depression. Unless a drainage system is installed, the water is removed only by percolation, transpiration, or evaporation. Table 19 indicates surface water depth and the duration and frequency of ponding. Duration is expressed as very brief if less than 2 days, brief if 2 to 7 days, long if 7 to 30 days, and very long if more than 30 days. Frequency is expressed as none, rare, occasional, and frequent. None means that ponding is not probable; rare that it is unlikely but possible under unusual weather conditions (the chance of ponding is nearly 0 percent to 5 percent in any year); occasional that it occurs, on the average, once or less in 2 years (the chance of ponding is 5 to 50 percent in any year); and frequent that it occurs, on the average, more than once in 2 years (the chance of ponding is more than 50 percent in any year).

Flooding is the temporary inundation of an area caused by overflowing streams, by runoff from adjacent slopes, or by tides. Water standing for short periods after rainfall or snowmelt is not considered flooding, and water standing in swamps and marshes is considered ponding rather than flooding.

Duration and frequency are estimated. Duration is expressed as extremely brief if 0.1 hour to 4 hours, very brief if 4 hours to 2 days, brief if 2 to 7 days, long if 7 to 30 days, and very long if more than 30 days. Frequency is expressed as none, very rare, rare, occasional, frequent, and very frequent. None means that flooding is not probable; very rare that it is very unlikely but possible under extremely unusual weather conditions (the chance of flooding is less than 1 percent in any year); rare that it is unlikely but possible under unusual weather conditions (the chance of flooding is 1 to 5 percent in any year); occasional that it occurs infrequently under normal weather conditions (the chance of flooding is 5 to 50 percent in any year); frequent that it is likely to occur often under normal weather conditions (the chance of flooding is more than 50 percent in any year but is less than 50 percent in all months in any year); and very frequent that it is likely to occur very often under normal weather conditions (the chance of flooding is more than 50 percent in all months of any year).

The information is based on evidence in the soil profile, namely thin strata of gravel, sand, silt, or clay deposited by floodwater; irregular decrease in organic matter content with increasing depth; and little or no horizon development.

Also considered is local information about the extent and levels of flooding and the relation of each soil on the landscape to historic floods. Information on the extent of flooding based on soil data is less specific than that provided by detailed engineering surveys that delineate flood-prone areas at specific flood frequency levels.

Soil Features

Table 20 gives estimates of various soil features. The estimates are used in land use planning that involves engineering considerations.

A restrictive layer is a nearly continuous layer that has one or more physical, chemical, or thermal properties that significantly impede the movement of water and air through the soil or that restrict roots or otherwise provide an unfavorable root environment. Examples are bedrock, cemented layers, dense layers, and frozen layers. The table indicates the hardness and thickness of the restrictive layer, both of which significantly affect the ease of excavation. *Depth to top* is the vertical distance from the soil surface to the upper boundary of the restrictive layer.

Potential for frost action is the likelihood of upward or lateral expansion of the soil caused by the formation of segregated ice lenses (frost heave) and the subsequent collapse of the soil and loss of strength on thawing. Frost action occurs when moisture moves into the freezing zone of the soil. Temperature, texture, density, permeability, content of organic matter, and depth to the water table are the most important factors considered in evaluating the potential for frost action. It is assumed that the soil is not insulated by vegetation or snow and is not artificially drained. Silty and highly structured, clayey soils that have a high water table in winter are the most susceptible to frost action. Well drained, very gravelly, or very sandy soils are the least susceptible. Frost heave and low soil strength during thawing cause damage to pavements and other rigid structures.

Risk of corrosion pertains to potential soil-induced electrochemical or chemical action that corrodes or weakens uncoated steel or concrete. The rate of corrosion of uncoated steel is related to such factors as soil moisture, particle-size distribution, acidity, and electrical conductivity of the soil. The rate of corrosion of concrete is based mainly on the sulfate and sodium content, texture, moisture content, and acidity of the soil. Special site examination and design may be needed if the combination of factors results in a severe hazard of corrosion. The steel or concrete in installations that intersect soil boundaries or soil layers is more susceptible to corrosion than the steel or concrete in installations that are entirely within one kind of soil or within one soil layer.

Soil Survey of Curry and Southwest Quay Counties, New Mexico

For *uncoated steel*, the risk of corrosion, expressed as *low, moderate*, or *high*, is based on soil drainage class, total acidity, electrical resistivity near field capacity, and electrical conductivity of the saturation extract.

For *concrete*, the risk of corrosion also is expressed as *low, moderate*, or *high*. It is based on soil texture, acidity, and amount of sulfates in the saturation extract.

Classification of the Soils

Soils are classified so that we can more easily remember significant characteristics. Classification enables us to assemble knowledge about the soils, to see their relationship to one another and to the whole environment, and to develop principles that help us to understand their behavior and their responses to manipulation. Through classification and then the use of soil maps, we can apply our knowledge of soils to specific areas.

The system of soil classification used by the National Cooperative Soil Survey has six categories. (10,13) Beginning with the broadest, these categories are the order, suborder, great group, subgroup, family, and series. Classification is based on soil properties observed in the field or inferred from those observations or from laboratory measurements. Table 21 shows the classification of the soils in the survey area. The categories are defined in the following paragraphs.

ORDER. Twelve soil orders are recognized. The differences among orders reflect the dominant soil-forming processes and the degree of soil formation. Each order is identified by a word ending in *sol*. An example is Aridisol.

SUBORDER. Each order is divided into suborders primarily on the basis of properties that influence soil genesis and are important to plant growth or properties that reflect the most important variables within the orders. The last syllable in the name of a suborder indicates the order. An example is Argid (*Arg*, meaning presence of an argillic horizon, plus *id*, from Aridisol).

GREAT GROUP. Each suborder is divided into great groups on the basis of close similarities in kind, arrangement, and degree of development of pedogenic horizons; soil moisture and temperature regimes; type of saturation; and base status. Each great group is identified by the name of a suborder and by a prefix that indicates a property of the soil. An example is Calciargids (*Calci*, meaning a calcic horizon within 100 centimeters or 40 inches of the soil surface, plus *argid*, the suborder of the Aridisols that has an argillic horizon).

SUBGROUP. Each great group has a typic subgroup. Other subgroups are intergrades or extragrades. The typic subgroup is the central concept of the great group; it is not necessarily the most extensive. Intergrades are transitions to other orders, suborders, or great groups. Extragrades have some properties that are not representative of the great group but do not indicate transitions to any other taxonomic class. Each subgroup is identified by one or more adjectives preceding the name of the great group. The adjective *Ustic* identifies the subgroup that typifies the great group. An example is Ustic Calciargids.

FAMILY. Families are established within a subgroup on the basis of physical and chemical properties and other characteristics that affect management. Generally, the properties are those of horizons below plow depth where there is much biological activity. Among the properties and characteristics considered are particle-size class, mineralogy class, cation-exchange activity class, soil temperature regime, soil depth, and reaction class. A family name consists of the name of a subgroup preceded by terms that indicate soil properties. An example is fine-loamy, mixed, thermic Ustic Calciargids.

SERIES. The series consists of soils within a family that have horizons similar in color, texture, structure, reaction, consistence, mineral and chemical composition, and arrangement in the profile. The Redona series is an example of a fine-loamy, mixed, superactive, thermic Ustic Calciargid.

Soil Series and Their Morphology

In this section, each soil series recognized in the survey area is described. Characteristics of the soil and the material in which it formed are identified for each series. A pedon, a small three-dimensional area of soil, that is typical of the series in the survey area is described. The detailed description of each soil horizon follows standards in the "Soil Survey Manual" (9) and in the "Field Book for Describing and Sampling Soils." (8) Many of the technical terms used in the descriptions are defined in "Soil Taxonomy" (13) and in "Keys to Soil Taxonomy." (12) Unless otherwise indicated, colors in the descriptions are for dry soil. Following the pedon description is the range of important characteristics of the soils in the series.

Acuff Series

Map unit(s): AcA, AcB
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Paleustolls

Typical Pedon

Map unit in which located: AcA, Acuff loam, 0 to 1 percent slopes Location in survey area: Curry County, New Mexico; 100 feet east and 2,300 feet north of the southwest corner of section 33, T. 35 E., R. 5 N.; Latitude: 34 degrees 36 minutes 42 seconds N.; Longitude: 103 degrees 14 minutes 22 seconds W.

- Ap1—0 to 4 inches; brown (7.5YR 4/3) loam, dark brown (7.5YR 3/3) moist; weak fine subangular blocky structure; hard, very friable, moderately sticky, moderately plastic; common fine and medium roots; few fine and medium interstitial and tubular pores; slightly alkaline; abrupt smooth boundary.
- Ap2—4 to 7 inches; brown (7.5YR 4/2) loam, dark brown (7.5YR 3/2) moist; weak fine subangular blocky structure; hard, very friable, slightly sticky and slightly plastic; few very fine and medium roots; few very fine and medium pores; moderately alkaline; abrupt smooth boundary.
- Bt1—7 to 14 inches; brown (7.5YR 4/2) clay loam; dark brown (7.5YR 3/2) moist; moderate medium subangular blocky structure; very hard, friable, slightly sticky and slightly plastic; few very fine roots; few fine and medium vesicular and tubular pores; common prominent continuous clay films on surfaces of peds and in pores; moderately alkaline; clear smooth boundary.
- Bt2—14 to 33 inches; brown (7.5YR 4/4) clay loam, brown (7.5YR 4/4) moist; moderate medium subangular blocky structure; very hard, friable, slightly sticky, slightly plastic; few very fine roots; few fine and medium pores; common prominent continuous clay films on faces of peds and in pores; few threads and masses of calcium carbonate in lower part; slightly effervescent; moderately alkaline; clear smooth wavy boundary.

Btk1—33 to 57 inches; light brown (7.5YR 6/4) clay loam, brown (7.5YR 5/4) moist; moderate medium subangular blocky structure; very hard, friable, slightly sticky, slightly plastic; few very fine roots; few fine and medium pores; many prominent continuous clay films on faces of peds and in pores; common threads and masses of calcium carbonate; violently effervescent; moderately alkaline; clear smooth boundary.

Btk2—57 to 80 inches; light brown (7.5YR 6/4) clay loam, brown (7.5YR 5/4) moist; moderate medium angular blocky structure; hard, friable, slightly sticky, slightly plastic; few fine roots; common fine and very fine pores; few prominent continuous clay films on faces of peds; many masses of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics

Depth to secondary calcium carbonate: More than 20 inches

Depth to calcic horizon: 30 to 60 inches

A horizon:

Hue: 7.5YR or 10YR Value: 3 or 4, 2 or 3 moist

Chroma: 2 or 3 Bt horizon:

Hue: 5YR or 7.5YR Value: 3 to 5, 2 to 4 moist

Chroma: 2 to 4

Texture: Loam, sandy clay loam, or clay loam

Btk horizon: Hue: 5YR or 7.5YR Value: 6 to 8, 5 to 7 moist

Chroma: 4 to 6

Texture: Loam, sandy clay loam, or clay loam

Alama Series

Map unit(s): 36

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Alluvial flats

Parent material: Red bed alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 1 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-silty, mixed, superactive, thermic Ustic Haplocambids

Typical Pedon

(taken from the Guadalupe County, New Mexico Soil Survey Report)

Map unit in which located: 36, Alama silt loam, 1 to 5 percent slopes Location in adjoining survey area: About 25 miles east of Santa Rosa, Guadalupe County, New Mexico, 200 feet north and 2,550 feet west of the southeast corner of section 15, T. 8 N., R. 26 E.; Latitude: 34 degrees 54 minutes 30 seconds N.; Longitude: 104 degrees 09 minutes 55 seconds W.

- A—0 to 3 inches; reddish brown (5YR 5/4) silt loam, dark reddish brown (5YR ¾) moist; weak thin platy structure in the upper 0.5 inch, over moderate fine subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; many fine roots; many very fine and fine pores; common clusters of fine rounded wormcasts; slightly effervescent; moderately alkaline; clear smooth boundary.
- Bw1—3 to 8 inches; reddish brown (5YR 5/4) silty clay loam, dark reddish brown (5YR 3/4) moist; weak coarse prismatic and moderate fine subangular blocky structure; hard, friable, slightly sticky and slightly plastic; many fine roots; many very fine and fine pores; common clusters of fine rounded wormcasts; slightly effervescent; slightly alkaline; clear smooth boundary.
- Bw2—8 to 18 inches; reddish brown (5YR 5/4) silty clay loam, dark reddish brown (5YR 3/4) moist; weak coarse prismatic and moderate fine subangular blocky structure; hard, friable, slightly sticky and plastic; many fine roots; many very fine and fine pores; few clusters of fine rounded wormcasts; strongly effervescent; slightly alkaline; gradual smooth boundary.
- Bw3—18 to 28 inches; reddish brown (5YR 5/4) silt loam, reddish brown (5YR 4/4) moist; weak medium subangular blocky structure; hard, friable, slightly sticky and plastic; common fine roots; common very fine and few fine pores; few clusters of fine rounded wormcasts; strongly effervescent; slightly alkaline; gradual smooth boundary.
- Bk—28 to 40 inches; reddish yellow (5YR 6/6) silt loam, yellowish red (5YR 4/6) moist; weak coarse subangular blocky structure; hard, friable, slightly sticky and plastic; few fine roots; common very fine and few fine pores; calcium carbonate segregated in few fine masses and in seams; violently effervescent; moderately alkaline; gradual wavy boundary.
- 2Bk—40 to 60 inches; reddish yellow (5YR 6/6) loam, yellowish red (5YR 4/6) moist; weak coarse subangular blocky structure; slightly hard, very friable, slightly sticky and plastic; few very fine and fine pores; calcium carbonate segregated in few fine concretions; strongly effervescent; moderately alkaline.

A horizon:

Hue: 2.5YR to 7.5YR Value: 3 to 6, 3 or 4 moist

Chroma: 4 to 6

Bw, Bk, and 2Bk horizon: Hue: 2.5YR to 7.5YR Value: 3 to 7, 3 to 6 moist

Chroma: 3 to 6

Note: Some pedons have BCk or C horizons below 60 inches.

Amarillo Series

Map unit(s): AfA, AfB, AnB Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Paleustalfs

Typical Pedon

Map unit in which located: AnB, Amarillo loamy fine sand, 1 to 3 percent slopes (fig. 6). Location in survey area: Curry County, New Mexico; 100 feet south and 100 feet east from the northwest corner of section 20, T 3 N., R. 32 E.; Latitude: 34 degrees 26 minutes 26 seconds N.; Longitude: 103 degrees 35 minutes 11 seconds W.

- Ap1—0 to 5 inches; reddish brown (5YR 5/4) loamy fine sand, yellowish red (5YR 5/6) moist; weak fine granular blocky structure; soft, very friable, nonsticky and nonplastic; common fine and very fine roots; very slightly effervescent; slightly alkaline; abrupt smooth boundary.
- Ap2—5 to 12 inches; reddish brown (5YR 5/4) loamy fine sand, yellowish red (5YR 5/6) moist; weak coarse angular blocky structure; hard, friable, nonsticky and nonplastic; common very fine, fine, and medium roots; very slightly effervescent; moderately alkaline; clear smooth boundary.
- Bt1—12 to 16 inches; yellowish red (5YR 4/6) sandy clay loam, yellowish red (5YR 4/6) moist; weak coarse subangular blocky structure; hard, friable, nonsticky and nonplastic; few very fine, fine, and medium roots; few fine and medium pores; few faint clay films on faces of peds and in pores; very slightly effervescent; neutral; clear smooth boundary.
- Bt2—16 to 22 inches; reddish brown (5YR 4/4) sandy clay loam, yellowish red (5YR 4/6) moist; moderate coarse subangular blocky structure; very hard, friable, nonsticky and nonplastic; few very fine, fine, and medium roots between peds; few fine and medium tubular pores; many prominent dark red (2.5YR 3/6) continuous clay films on faces of peds and in pores; very slightly effervescent; neutral; clear smooth boundary.
- Bt3—22 to 34 inches; yellowish red (5YR 4/6) sandy clay loam, yellowish red (5YR 4/6) moist; moderate coarse subangular blocky structure; hard, friable, nonsticky and nonplastic; few very fine, fine, and medium roots; few fine and medium pores; many prominent continuous clay films on faces of peds and in pores; very slightly effervescent; strongly alkaline; abrupt smooth boundary.
- Btk1—34 to 38 inches; pink (5YR 7/4) loam, light reddish brown (5YR 6/4) moist; weak fine subangular blocky structure; very hard, friable, slightly sticky and nonplastic; few very fine, fine, and medium roots; few fine and medium pores; common distinct discontinuous clay films on faces of peds, root channels, and pores; many rounded masses of calcium carbonate; violently effervescent; moderately alkaline; clear smooth boundary.
- Btk2—38 to 57 inches; pink (7.5YR 7/4) clay loam, light reddish brown (5YR 7/4) moist; weak coarse subangular blocky structure; very hard, friable, slightly sticky and nonplastic; few very fine and medium roots; few very fine and medium pores; few distinct discontinuous clay films in root channels and pores; many rounded soft masses of calcium carbonate; violently effervescent; moderately alkaline.
- Btk3—57 to 80 inches; pink (7.5YR 8/4) clay loam, pink (7.5YR 8/4) moist; weak coarse subangular blocky structure; very hard, friable, slightly sticky and slightly plastic; few distinct discontinuous clay films in root channels and pores; many rounded soft masses of calcium carbonate; violently effervescent; strongly alkaline.



Figure 6.—A profile of Amarillo loamy fine sand, 1 to 3 percent slopes. The subsoil is a well developed soil with secondary accumulations of calcium carbonate (lime) beginning at about 110 cm.

Range in Characteristics

Depth to the calcic horizon: 30 to 60 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist Chroma: 2 to 4

Texture: Loamy fine sand or fine sandy loam

Bt horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 6

Texture: Fine sandy loam, sandy clay loam, or clay loam

Btk horizon:

Hue: 5YR or 7.5YR Value: 5 to 8, 4 to 7 moist

Chroma: 3 to 6

Texture: Loam, sandy clay loam, or clay loam

Visible calcium carbonate: 15 to 35 percent in the form of films, threads, masses, and

concretions

Arch Series

Map unit(s): MsE
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Interdunes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 1 to 10 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, carbonatic, thermic Aridic Calciustepts

Typical Pedon

Map unit in which located: MsE, Milsand-Arch complex, 1 to 20 percent slopes Location in survey area: Curry County, New Mexico; 850 feet south and 1,100 feet east of the northwest corner of section 35, T. 2 N., R. 31 E.; Latitude: 34 degrees 21 minutes 32 seconds N.; Longitude: 103 degrees 39 minutes 54 seconds W.

- A—0 to 6 inches; brown (10YR 5/3) fine sandy loam, dark brown (10YR 4/3) moist; weak fine granular structure; soft, very friable, nonsticky and nonplastic; many very fine roots; few medium pores; violently effervescent; disseminated calcium carbonate; moderately alkaline; clear smooth boundary.
- Bk1—6 to 16 inches; pale brown (10YR 6/3) sandy clay loam, brown (10YR 5/3) moist; weak fine and medium subangular blocky structure; soft, very friable, slightly sticky and slightly plastic; few very fine roots; few medium pores; violently effervescent; disseminated calcium carbonate; moderately alkaline; clear smooth boundary.
- Bk2—16 to 37 inches; very pale brown (10YR 8/3) sandy clay loam, very pale brown (10YR 7/3) moist; weak medium subangular blocky structure; slightly hard, friable, sticky and plastic; common very fine roots; few medium pores; violently effervescent; many small and medium masses and disseminated calcium carbonate; moderately alkaline; gradual smooth boundary.
- Bk3—37 to 80 inches; very pale brown (10YR 7/3) sandy clay loam, pale brown (10YR 6/3) moist; weak medium subangular blocky structure; slightly hard, friable, sticky and plastic; few fine roots; violently effervescent; many large masses and disseminated calcium carbonate; strongly alkaline.

Range in Characteristics

Depth to carbonates: Free carbonates are usually present in surface horizon.

A horizon: Hue: 10YR

Value: 5 or 6, 4 or 5 moist

Chroma: 3 or 4 Bk horizon:

Hue: 7.5YR or 10YR Value: 5 to 7, 4 to 6 moist

Chroma: 2 to 4

Texture: Fine sandy loam, sandy clay loam, or loam

Armesa Series

Map unit(s): 58, 60
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Low hills, pediments

Parent material: Eolian deposits and alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 0 to 7 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, carbonatic, thermic Ustic Haplocalcids

Typical Pedon

(taken from the DeBaca County, New Mexico Survey Report)

Map unit in which located: 50, Berwolf-Chispa-Armesa association, 0 to 5 percent slopes (as mapped in DeBaca County)

- Location in adjoining survey area: About 8 miles south of Fort Sumner, DeBaca County, New Mexico; 2,000 feet south and 2,200 feet east of the northwest corner of section 25, T. 1 N., R. 26 E.; Latitude: 34 degrees 16 minutes 59 seconds N.; Longitude: 104 degrees 10 minutes 05 seconds W.
 - A—0 to 4 inches; brown (7.5YR 5/4) fine sandy loam, dark brown (7.5YR 4/4) moist; weak fine granular structure; soft, very friable, nonsticky and nonplastic; many fine and very fine roots; violently effervescent; disseminated calcium carbonate; moderately alkaline; clear smooth boundary.
 - Bw—4 to 15 inches; brown (7.5YR 5/4) fine sandy loam, dark brown (7.5YR 4/4) moist; weak medium subangular blocky structure; soft, very friable, nonsticky and nonplastic; many fine and very fine roots; violently effervescent; disseminated calcium carbonate; moderately alkaline; abrupt wavy boundary.
 - Bk1—15 to 24 inches; light reddish brown (5YR 6/4) sandy clay loam, reddish brown (5YR 5/4) moist; moderate medium subangular blocky structure; slightly hard, friable, slightly sticky and nonplastic; few fine roots; violently effervescent; many medium masses and nodules of calcium carbonate; moderately alkaline; gradual wavy boundary.
 - Bk2—24 to 37 inches; light reddish brown (5YR 6/4) sandy clay loam, reddish brown (5YR 5/4) moist; moderate fine subangular blocky structure; hard, friable, slightly sticky and slightly plastic; violently effervescent; common small masses of calcium carbonate; moderately alkaline; gradual wavy boundary.

Bk3—37 to 60 inches; pink (5YR 7/4) sandy clay loam, light reddish brown (5YR 6/4) moist; massive; hard, friable, slightly sticky and slightly plastic; violently effervescent; common large masses of calcium carbonate; moderately alkaline.

Range in Characteristics

Depth to calcic horizon: 7 to 19 inches

Calcium carbonate equivalent: 45 to 65 percent in the control section

Coarse Fragments: 0 to 10 percent

A horizon:

Hue: 5YR to 10YR

Value: 5 or 6, 3 to 5 moist

Chroma: 3 or 4

Texture: Fine sandy loam or sandy clay loam

Bw horizon:

Hue: 5YR to 10YR

Value: 5 or 6, 4 or 5 moist

Chroma: 2 to 4

Texture: Fine sandy loam or sandy clay loam

Bk horizon:

Hue: 5YR or 7.5YR Value: 6 to 8, 5 to 7 moist

Chroma: 2 to 8

Texture: Sandy clay loam or fine sandy loam

Arvana Series

Map unit(s): AvA

Depth class: Moderately deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 2 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Petrocalcic Paleustalfs

Typical Pedon

Map unit in which located: AvA, Arvana fine sandy loam, 0 to 2 percent slopes Location in survey area: Curry County, New Mexico; 500 feet west and 100 feet south of the northeast corner of section 1, T. 2 N., R. 32 E.; Latitude: 34 degrees 26 minutes 04 seconds N.; Longitude: 103 degrees 31 minutes 52 seconds W.

- A—0 to 11 inches; reddish brown (5YR 4/4) fine sandy loam, dark reddish brown (5YR 3/4) moist; moderate, medium subangular blocky structure; hard, soft, nonsticky and nonplastic; common fine roots, few fine pores; neutral, abrupt smooth boundary.
- Bt—11 to 21 inches; reddish brown (5YR 4/4) sandy clay loam, dark reddish brown (5YR 3/4) moist; weak coarse prismatic parting to moderate, medium subangular blocky structure; very hard, friable, nonsticky and nonplastic; few

fine roots and pores; many thin continuous clay films on ped faces and in pores; neutral; clear smooth boundary.

Btk—21 to 31 inches; light reddish brown (5YR 6/3) loam, reddish brown (5YR 5/3) moist; weak medium subangular blocky structure; hard, friable, sticky and nonplastic, few fine roots; common fine and medium pores; few thin clay films on ped faces and in pores; many masses of calcium carbonate, violently effervescent; moderately alkaline; abrupt, wavy boundary.

Bkm—31 to 45 inches; pink (5YR 8/3) indurated caliche.

BCk—45 to 80 inches light reddish brown (5YR 6/3) sandy clay loam, reddish brown (5YR 5/3) moist, weak fine subangular blocky structure; hard, friable, slightly sticky and nonplastic; few fine roots and few fine pores, many medium and large masses of calcium carbonate, violently effervescent.

Range in Characteristics

Depth to carbonates: 10 to 21 inches

Depth to petrocalcic horizon: 25 to 40 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4, 3 moist Chroma: 3 or 4

Texture: Fine sandy loam Clay content: 8 to 18 percent

Bt horizon: Hue: 5YR

Value: 4, 3 moist Chroma: 3 or 4

Texture: Sandy clay loam or clay loam

Btk horizon: Hue: 5YR

Value: 5 or 6, 4 or 5 moist

Chroma: 3 or 4

Texture: Loam or clay loam

Bkm horizon: Dominantly 6 to 12 inches thick, but ranges up to 2 feet in some pedons. It is strongly cemented to indurated.

BCk horizon:

Hue: 2.5YR to 7.5YR Value: 4 to 8, 3 to 7 moist

Chroma: 3 to 8

Texture: Loam, sandy clay loam, or clay loam

Berwolf Series

Map unit(s): 61

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Interdunes

Parent material: Eolian deposits derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 1 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Coarse-loamy, mixed, superactive, thermic Ustic Calciargids

Typical Pedon

(taken from the DeBaca County, New Mexico Soil Survey Report)

Map unit in which located: 48, Berwolf-Sharvana association, 0 to 3 percent slopes (as mapped in DeBaca County)

Location in adjoining survey area: About 10 miles north and 2 miles west of Taiban, DeBaca County, New Mexico; 1,500 feet north and 2,500 feet east of the southwest corner of section 19, T. 4 N., R. 28 E.; Latitude: 34 degrees 33 minutes 12 seconds N.; Longitude: 104 degrees 02 minutes 38 seconds W.

- A—0 to 11 inches; brown (7.5YR 4/4) fine sandy loam, dark brown (7.5YR 3/4) moist; weak fine granular structure; soft, very friable, nonsticky and nonplastic; many fine and very fine roots; slightly alkaline; clear smooth boundary.
- Bt1—11 to 20 inches; reddish brown (5YR 5/4) fine sandy loam, reddish brown (5YR 4/4) moist; weak medium subangular blocky structure; hard, friable, slightly sticky and nonplastic; common fine and very fine roots; common thin clay films on faces of peds and in pores; moderately alkaline; clear wavy boundary.
- Bt2—20 to 34 inches: yellowish red (5YR 5/6) fine sandy loam, yellowish red (5YR 4/6) moist; moderate medium subangular blocky structure; hard, friable, slightly sticky and nonplastic; few fine and very fine roots; many thin clay films on faces of peds and in pores; slightly effervescent; disseminated calcium carbonate; moderately alkaline; clear wavy boundary.
- Bk1—34 to 45 inches; reddish yellow (5YR 6/6) fine sandy loam, yellowish red (5YR 5/6) moist; weak medium subangular blocky structure; soft, very friable, nonsticky and nonplastic; few fine and very fine roots; violently effervescent; common fine soft masses and few medium nodules of calcium carbonate; moderately alkaline; abrupt wavy boundary.
- Bk2—45 to 60 inches; pink (5YR 8/3) fine sandy loam, reddish yellow (5YR 7/6) moist; massive; very hard, friable, slightly sticky and nonplastic; violently effervescent; many large masses and nodules of calcium carbonate; moderately alkaline.

Range in Characteristics

Depth to the calcic horizon: Between 30 and 60 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4 to 6, 3 or 4 moist

Chroma: 2 to 6

Texture: Loamy fine sand or fine sandy loam

Bt horizon:

Hue: 2.5YR to 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 3 to 6

Textures: Sandy loam or fine sandy loam

Bk horizon:

Hue: 2.5YR to 7.5YR Value: 5 to 8, 4 to 7 moist

Chroma: 2 to 8

Textures: Sand, loamy fine sand, sandy loam, or fine sandy loam

Bippus Series

Map unit(s): BcA
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Draws, flood plains Parent material: Loamy alluvium

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 2 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Cumulic Haplustolls

Typical Pedon

Map unit in which located: BcA, Bippus clay loam, 0 to 2 percent slopes Location in survey area: Curry County, New Mexico; 900 feet south and 300 feet west of the northeast corner of section 23, T. 4 N., R. 34 E.; Latitude: 34 degrees 33 minutes 44 seconds N.; Longitude: 103 degrees 17 minutes 48 seconds W.

- A1—0 to 8 inches; brown (7.5YR 4/2) clay loam, dark brown (7.5YR 3/2) moist; moderate, medium granular and subangular blocky structure; hard, very friable; sticky and slightly plastic; many very fine and fine roots; many very fine interstitial and tubular pores; neutral; gradual smooth boundary.
- A2—8 to 13 inches; brown (7.5YR 4/3) clay loam, dark brown (7.5YR 3/3) moist; moderate, medium subangular blocky structure; hard, very friable, sticky and slightly plastic; many very fine and fine roots, many very fine interstitial and tubular pores; neutral; gradual smooth boundary.
- Bw1—13 to 23 inches; brown (7.5YR 4/3) clay loam, dark brown (7.5YR 3/3) moist; moderate, medium subangular blocky structure; hard, very friable, moderately sticky, slightly plastic; many very fine and fine roots, many fine vesicular and tubular pores, few threads of calcium carbonate, slightly effervescent; slightly alkaline; clear, smooth boundary.
- Bw2—23 to 80 inches; brown (7.5YR 4/4) clay loam, dark brown (7.5YR 3/4) moist; weak coarse prismatic structure parting to moderate, medium subangular blocky; hard, very friable, sticky and slightly plastic; common, very fine and fine roots, common, fine interstitial and tubular pores; many fine threads and few hard concretions of calcium carbonate in lower part; strongly effervescent; moderately alkaline.

Range in Characteristics

Thickness of the mollic epipedon: 20 to 40 inches

A horizon:

Hue: 7.5YR or 10YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 or 3

Bw horizon:

Hue: 7.5YR or 10YR Value: 4 or 5, 2 or 3 moist

Chroma: 2 to 4

Chispa Series

Map unit(s): 31, 60
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Low hills

Parent material: Red bed alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 0 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Ustic Haplocalcids

Typical Pedon

Map unit in which located: 50, Berwolf-Chispa-Armesa association, 0 to 5 percent slopes (as mapped in DeBaca County)

Location in adjoining survey area: About 6 miles south of Fort Sumner, DeBaca County, New Mexico; 20 feet north and 2,500 feet east of the southwest corner of section 20, T. 2 N., R. 26 E.; Latitude: 34 degrees 22 minutes 36 seconds N.; Longitude: 104 degrees 14 minutes 16 seconds W.

- A—0 to 10 inches; brown (7.5YR 4/4) fine sandy loam, dark brown (7.5YR 3/4) moist; moderate fine granular structure; slightly hard, very friable, nonsticky and nonplastic; many fine and very fine roots; violently effervescent; disseminated calcium carbonate; moderately alkaline; clear smooth boundary.
- Bk1—10 to 31 inches; brown (7.5YR 5/4) sandy clay loam, strong brown (7.5YR 4/6) moist; weak medium subangular blocky structure; very hard, friable, sticky and plastic; few fine and very fine roots; violently effervescent; many large soft masses and common medium nodules of calcium carbonate; moderately alkaline; clear wavy boundary.
- Bk2—31 to 42 inches; light brown (7.5YR 6/4) sandy clay loam, strong brown (7.5YR 4/6) moist; moderate medium subangular blocky structure; slightly hard, very friable, slightly sticky and plastic; few fine and medium roots; common fine pores; few fine concretions of calcium carbonate; violently effervescent; moderately alkaline; clear wavy boundary.
- BCk—42 to 60 inches; light reddish brown (5YR 6/4) sandy clay loam, reddish brown (5YR 4/4) moist; massive; very hard, friable, slightly sticky and slightly plastic; few fine and very fine roots; violently effervescent; few large soft masses and nodules of calcium carbonate; moderately alkaline.

Range in Characteristics

Depth to calcic horizon: 20 to 40 inches

A horizon:

Hue: 5YR to 10YR

Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 4

Bk horizon:

Hue: 5YR to 7.5YR Value: 4 to 7. 3 to 6 moist

Chroma: 4 to 6

Texture: Sandy clay loam or clay loam

BCk horizon:

Hue: 2.5YR to 7.5YR Value: 6 to 8, 4 to 7 moist

Chroma: 4 to 6

Texture: Sandy loam, loam, or sandy clay loam

Drake Series

Map unit(s): DRC
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Dunes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 1 to 8 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Calciustepts

Typical Pedon

Map unit in which located: DrC, Drake soils, 1 to 8 percent slopes Location in survey area: Curry County, New Mexico; 700 feet south and 750 feet west of the northeast corner of section 2, T. 1 N., R. 31 E.; Latitude: 34 degrees 20 minutes 39 seconds N.; Longitude: 103 degrees 39 minutes 19 seconds W.

- A—0 to 5 inches; yellowish brown (10YR 5/4) loam, dark yellowish brown (10YR 4/4) moist; weak fine subangular blocky structure; soft, very friable, slightly sticky and slightly plastic; common very fine and fine roots; few fine pores; disseminated calcium carbonate; strongly effervescent; slightly alkaline; clear, smooth boundary.
- Bw1—5 to 14 inches; grayish brown (10YR 5/2) loam, dark grayish brown (10YR 4/2) moist; weak fine subangular blocky structure; soft, very friable, sticky and plastic; few fine roots; common, very fine and fine pores; strongly effervescent; moderately alkaline; gradual smooth boundary.
- Bw2—14 to 34 inches; light gray (10YR 7/2) clay loam, light brownish gray (10YR 6/2) moist; moderate medium subangular blocky structure; soft, very friable, sticky and plastic; few fine roots; many fine pores; violently effervescent; moderately alkaline; clear, smooth boundary.
- Bk—34 to 80 inches; light gray (2.5Y 7/2) sandy loam, light brownish gray (2.5Y 6/2) moist; massive; slightly hard, very friable, sticky and plastic; few fine pores; common fine and medium masses of calcium carbonate; violently effervescent; strongly alkaline.

Range in Characteristics

Depth to carbonates: At the surface

A horizon:

Hue: 10YR or 2.5Y Value: 5 to 7. 4 to 6 moist

Chroma: 2 to 4

Bw and Bk horizon: Hue: 10 YR or 2.5Y Value: 5 to 8, 4 to 7 moist

Chroma: 2 to 4

Texture: Sandy loam, loam, or sandy clay loam

Estacado Series

Map unit(s): EsA, EsB
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Paleustolls

Typical Pedon

Map unit in which located: EsB, Estacado loam, 1 to 3 percent slopes Location in survey area: Curry County, New Mexico; 1,100 feet north and 1,100 feet west of the southeast corner of section 28, T. 7 N., R. 28 E.; Latitude: 34 degrees 47 minutes 50 seconds N.; Longitude: 103 degrees 58 minutes 35 seconds W.

- A—0 to 10 inches; brown (7.5YR 4/2) loam, dark brown (7.5YR 3/2) moist, moderate medium subangular blocky structure parting to moderate medium granular; hard, very friable, nonsticky and nonplastic; many fine and very fine roots, few fine pores; strongly effervescent; slightly alkaline; gradual smooth boundary.
- Bt—10 to 22 inches; dark brown (10YR 4/3) clay loam, dark brown (10YR 3/3) moist; moderate medium subangular blocky structure, hard, very friable, nonsticky and nonplastic; common fine and very fine roots, few fine pores; few thin clay films on ped faces and lining pores; strongly effervescent, slightly alkaline; clear, smooth boundary.
- Btk1—22 to 32 inches; brown (7.5YR 5/4) clay loam, brown (7.5YR 4/4) moist; weak medium prismatic structure parting to moderate, medium subangular blocky; hard, friable slightly sticky and nonplastic; few fine roots, few fine pores; few thin clay films on ped faces and lining pores, strongly effervescent; moderately alkaline; clear, smooth boundary.
- Btk2—32 to 80 inches; pink (7.5YR 7/4) clay loam, light brown (7.5YR 6/4) moist; weak medium subangular blocky structure; hard, friable; slightly sticky and nonplastic; few fine roots, few fine pores; many very fine and fine masses of calcium carbonate, violently effervescent; moderately alkaline.

Range in Characteristics

A horizon:

Hue: 7.5YR or 10 YR

Value: 4 or 5, 3 or 4 moist

Chroma: 2 or 3

Bt horizon:

Hue: 7.5YR or 10YR Value: 4 or 5, 3 or 4 moist

Chroma: 3 or 4

Btk horizon:
Hue: 7.5YR

Value: 4 to 8, 3 to 7 moist

Chroma: 3 to 6

Friona Series

Map unit(s): FrA

Depth class: Moderately deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Petrocalcic Paleustolls

Typical Pedon

Map unit in which located: FrA, Friona loam, 0 to 1 percent slopes (fig. 7.)

Location in survey area: Quay County, New Mexico; 800 feet west and 100 feet south of the northeast corner of section 32, T. 6 N., R. 29 E.; Latitude: 34 degrees 42 minutes 24 seconds N.; Longitude: 103 degrees 53 minutes 04 seconds W.

- A—0 to 8 inches; brown (7.5YR 4/3) loam, dark brown (7.5YR 3/3) moist, weak fine subangular blocky structure; hard, friable, nonsticky and nonplastic; few fine roots, few fine pores; neutral, abrupt smooth boundary.
- Bt1—8 to 17 inches; brown (7.5YR 4/3) clay loam, dark brown (7.5YR 3/3) moist; moderate, medium subangular structure; very hard, firm, slightly sticky and slightly plastic; few fine roots, few fine and medium pores; thick, continuous clay films on ped faces and in pores; neutral, clear, smooth boundary.
- Bt2—17 to 31 inches; brown (7.5YR 4/3) sandy clay loam, dark brown (7.5YR 3/3) moist, weak medium subangular blocky structure; very hard, firm, slightly sticky, slightly plastic; few fine roots, few fine and medium pores; thin, continuous clay films; neutral, clear, smooth boundary.

Bkm—31 to 35 inches; pinkish white (7.5YR 8/2) indurated caliche.

BCk—35 to 80 inches; light brown (7.5YR 6/3) sandy clay loam, brown (7.5YR 5/3) moist, weak fine subangular blocky structure, hard, friable, slightly sticky and nonplastic; few fine roots, few fine pores; many fine and medium masses of calcium carbonate, violently effervescent; moderately alkaline.

Range in Characteristics

Depth to petrocalcic horizon: 20 to 35 inches

A horizon: Hue: 7.5YR

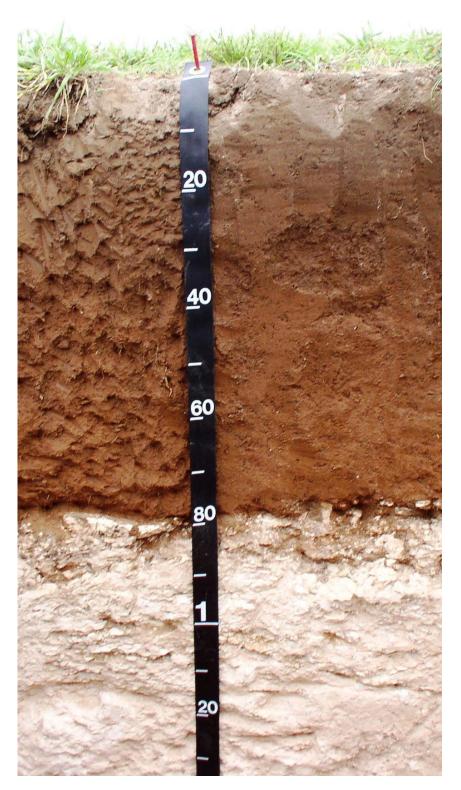


Figure 7.—A profile of Friona loam, 0 to 1 percent slopes. The subsoil has a hard layer of indurated caliche at 80 cm restricting the movement of water and roots.

Value: 4, 3 moist Chroma: 2 or 3

Bt horizon: Hue: 7.5YR

Value: 4 or 5, 3 or 4 moist

Chroma: 3 or 4

Texture: Clay loam or sandy clay loam

Bkm horizon: Indurated caliche

BCk horizon:

Hue: 7.5YR or 10YR Value: 6 or 8, 5 or 7 moist

Chroma: 3 or 4

Texture: Loam, sandy clay loam, or clay loam

Gallen Series

Map unit(s): 37

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Hills

Parent material: Gravelly slope alluvium derived from igneous, metamorphic, and

sedimentary rock

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 2 to 7 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Loamy-skeletal, mixed, superactive, thermic Ustic Haplocalcids

Typical Pedon

(taken from the DeBaca County, New Mexico Soil Survey Report)

Map unit in which located: 37, Ima-Gallen association, 2 to 7 percent slopes Location in adjoining survey area: About 6 miles south of Fort Sumner, DeBaca County, New Mexico; 500 feet west of the southeast corner of section 16, T. 2 N., R. 26 E.; Latitude: 34 degrees 23 minutes 26 seconds N.; Longitude: 104 degrees 12 minutes 47 seconds W.

- A—0 to 5 inches; reddish brown (5YR 5/4) gravelly sandy loam, reddish brown (5YR 4/4) moist; moderate fine granular structure; soft, very friable, nonsticky and nonplastic; many very fine roots; 20 percent pebbles; violently effervescent; disseminated calcium carbonate; moderately alkaline; abrupt smooth boundary.
- Bw—5 to 20 inches; reddish brown (5YR 5/3) very gravelly sandy loam, reddish brown (5YR 4/3) moist; moderate medium subangular block structure; soft, very friable, nonsticky and nonplastic; common very fine roots; violently effervescent; disseminated calcium carbonate; moderately alkaline; clear wavy boundary.
- Bk—20 to 60 inches; light reddish brown (5YR 6/4) extremely gravelly sandy loam with strata of extremely gravelly loamy sand and extremely gravelly fine sandy loam, reddish brown (5YR 5/4) moist; massive; soft, very friable, nonsticky and nonplastic; few fine and very fine roots; violently effervescent;

disseminated calcium carbonate and coatings of calcium carbonate on rocks; moderately alkaline.

Range in Characteristics

A horizon:

Hue: 5YR to 10YR

Value: 4 or 5, 3 or 4 moist

Chroma: 3 or 4

Bw horizon:

Hue: 5YR or 7.5YR Value: 4 to 6. 4 or 5 moist

Chroma: 3 or 4

Texture: Very gravelly sandy loam or very gravelly loam

Bk horizon:

Hue: 5YR or 7.5YR Value: 5 to 7, 4 or 5 moist

Chroma: 2 to 4

Texture: Extremely gravelly sand, very gravelly loamy sand, extremely gravelly sandy

loam, or extremely gravelly fine sandy loam

Gomez Series

Map unit(s): GoB
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Coarse-loamy, mixed, active, thermic Aridic Calciustepts

Typical Pedon

Map unit in which located: GoB, Gomez loamy fine sand, 0 to 3 percent slopes Location in survey area: Curry County, New Mexico; 2,550 feet north and 2,550 feet east of the southwest corner of section 1, T. 1 N., R. 31 E.; Latitude: 34 degrees 20 minutes 20 seconds N., Longitude: 103 degrees 38 minutes 39 seconds W.

- A—0 to 12 inches; brown (10YR 5/3) loamy fine sand, brown (10YR 4/3) moist; weak medium subangular blocky structure; soft, very friable, nonsticky and nonplastic; common fine and few medium roots; few fine tubular and many fine interstitial pores; few fine masses of calcium carbonate; strongly effervescent; moderately alkaline; clear smooth boundary.
- Bk1—12 to 20 inches; pale brown (10YR 6/3) fine sandy loam, brown (10YR 5/3) moist; weak medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; common fine roots; few fine and medium fine pores; few fine masses of calcium carbonate; violently effervescent; moderately alkaline; abrupt smooth boundary.
- Bk2—20 to 23 inches; light brownish gray (10YR 6/2) loam, grayish brown (10YR 5/2) moist; moderate medium subangular blocky structure; slightly hard, very friable, slightly sticky and plastic; few fine roots; common fine pores; few fine

concretions of calcium carbonate; violently effervescent; moderately alkaline; abrupt smooth boundary.

Bk3—23 to 47 inches; pale brown (10YR 6/3) fine sandy loam, brown (10YR 5/3) moist; weak medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; few fine roots; many fine pores; common fine masses and coatings of calcium carbonate; violently effervescent; strongly alkaline; gradual smooth boundary.

C—47 to 80 inches; very pale brown (10YR 7/3) loamy fine sand, light yellowish brown (10YR 6/4) moist; massive; slightly hard, very friable, nonsticky and nonplastic; few fine roots; many fine pores; common fine masses of calcium carbonate; violently effervescent; strongly alkaline.

Range in Characteristics

Depth to calcic horizon: 15 to 40 inches

A horizon:

Hue: 7.5YR or 10YR Value: 5 or 6, 4 or 5 moist

Chroma: 2 or 3

Bk horizon:

Hue: 7.5YR or 10YR Value: 5 or 6, 4 or 5 moist

Chroma: 2 to 4

Texture: Fine sandy loam, sandy loam, or clay loam

C horizon:

Hue: 7.5YR or 10YR Value: 6 to 8, 5 to 7 moist

Chroma: 1 to 4

Texture: Loamy fine sand, fine sandy loam, or loam

Grier Series

Map unit(s): GrA
Depth class: Very deep

Drainage class: Somewhat poorly drained Slowest permeability: 0.06 to 0.2 in/hr (slow)

Landform: Basin floors, playa floors, pluvial lakes (relict)

Parent material: Clayey lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 2 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, calcareous, thermic Typic

Endoaquepts

Typical Pedon

Map unit in which located: GrA, Grier clay loam, 0 to 2 percent slopes Location in survey area: Curry County, New Mexico: 70 feet south and 2,450 feet east of the NW corner of section 2, T. 1 N., R. 31 E.; Latitude: 34 degrees 20 minutes 46 seconds N.; Longitude: 103 degrees 39 minutes 43 seconds W.

A—0 to 4 inches; dark grayish brown (2.5Y 4/2) clay loam, very dark grayish brown (2.5Y 3/2) moist; fine granular structure; slightly hard, friable, slightly

- sticky, slightly plastic; common very fine and fine roots throughout and common medium roots; common very fine and fine tubular pores; violently effervescent; slightly alkaline; abrupt smooth boundary.
- Bw1—4 to 13 inches; light gray (5Y 7/1) and gray (5Y 5/1) clay loam, light gray (5Y 7/1) to gray (5Y 6/1) crushed, and dark gray (5Y 4/1) moist; moderate medium subangular blocky structure; slightly hard, firm, very sticky, very plastic; common very fine and fine roots; common very fine and fine tubular pores; violently effervescent; slightly alkaline; abrupt smooth boundary.
- Bw2—13 to 18 inches; gray (5Y 6/1) clay loam, gray (5Y 5/1) moist; moderate medium prismatic structure parting to moderate fine and medium subangular blocky; hard, firm, very sticky, very plastic; common very fine and fine roots; common fine and medium tubular pores; violently effervescent; moderately alkaline; clear smooth boundary.
- Bgk1—18 to 28 inches; gray (5Y 6/1) sandy clay loam, dark gray (5Y 4/1) moist; moderate medium prismatic structure parting to strong medium subangular blocky; hard, firm, very sticky, very plastic; common very fine and fine roots; common fine and medium tubular pores; few fine distinct pale yellow (2.5Y 7/4) iron concentrations; few angular cylindrical soft masses of carbonate; violently effervescent; strongly alkaline; clear smooth boundary.
- Bgk2—28 to 35 inches; light gray (5Y 7/1) sandy clay loam, light gray (5Y 7/1) to gray (5Y 6/1) moist; moderate medium prismatic structure parting to strong medium subangular blocky; hard, firm, very sticky, very plastic; few very fine and fine roots throughout and roots; common very fine and fine tubular pores; few fine distinct pale yellow (2.5Y 7/6) iron concentrations; few angular cylindrical soft masses of carbonate; violently effervescent; strongly alkaline; clear smooth boundary.
- Bgk3—35 to 65 inches; light gray (5Y 7/1) clay loam, light gray (5Y 7/1) moist; moderate coarse prismatic structure parting to strong medium subangular blocky; hard, firm, very sticky, very plastic; few very fine and fine roots; common very fine and fine tubular pores; common fine distinct pale yellow (2.5Y 8/2) iron concentrations; violently effervescent; strongly alkaline; clear smooth boundary.
- Bgk4—65 to 80 inches; light gray (5Y 7/1) clay loam, light gray (5Y 7/1) moist; very few distinct pale yellow (2.5Y 7/6) mottles; moderate coarse prismatic structure parting to moderate medium subangular blocky; hard, firm, very sticky, slightly plastic; few very fine and fine roots; common very fine and fine tubular pores; violently effervescent; strongly alkaline.

Range in Characteristics

Depth to water table: 1.5 to 3 feet

A horizon:

Hue: 10YR or 2.5Y Value: 5 to 7, 4 to 7 moist

Chroma: 1 or 2

Bw horizon:

Hue: 2.5Y or 5Y

Value: 5 to 7, 4 to 6 moist

Chroma: 1 or 2

Texture: Sandy clay loam or clay loam

Bgk horizon: Hue: 2.5Y or 5Y

Value: 6 or 7, 5 to 7 moist

Chroma: 1 or 2

Texture: Clay loam or clay

Redoximorphic features: Amount—very few to few; hue—2.5Y; value—7 or 8;

chroma—2 to 6; kind—iron concentrations

Hassell Series

Map unit(s): 11

Depth class: Moderately deep Drainage class: Well drained

Slowest permeability: 0.06 to 0.2 in/hr (slow)

Landform: Pediments

Parent material: Red bed alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 0 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Ustertic Haplargids

Typical Pedon

Map unit in which located: 11, Tucumcari-Hassell clay loams, 0 to 5 percent slopes Location in survey area: Quay County, New Mexico; 2,500 feet north and 1,050 feet east of the southwest corner of section 29, T. 8 N., R. 27 E.; Latitude: 34 degrees 42 minutes 21 seconds N.; Longitude: 104 degrees 06 minutes 32 seconds W.

- A—0 to 4 inches; reddish brown (5YR 5/3) clay loam, reddish brown (5YR 4/3) moist; weak very fine and fine subangular blocky structure; slightly hard, friable, slightly sticky and slightly plastic; many very fine and fine roots; few very fine and fine pores; moderately alkaline; clear smooth boundary.
- Bt—4 to 18 inches; reddish brown (5YR 4/3) clay loam, reddish brown (5YR 4/3) moist; moderate fine and medium subangular blocky structure; hard, firm, sticky and plastic; common very fine and fine roots; few very fine and fine pores; common thin clay films on ped faces and lining pores; moderately alkaline; clear smooth boundary.
- Btk—18 to 34 inches; reddish brown (5YR 5/4) clay, reddish brown (5YR 4/4) moist; weak fine and medium subangular blocky structure; few very fine and fine roots; few very fine pores; few fine soft masses of calcium carbonate; violently effervescent; moderately alkaline; clear smooth boundary

R-34 to 38 inches; reddish brown (2.5YR 4/4) shale.

Range in Characteristics

Depth to shale: 20 to 40 inches

A horizon:

Hue: 5YR or 7.5YR

Value: 4 or 5, 3 or 4 moist

Chroma: 3 or 4

Bt and Btk horizon: Hue: 2.5YR or 5YR Value: 4 to 6, 3 to 5 moist

Chroma: 3 to 6

Texture: Clay loam or clay

Ima Series

Map unit(s): 37

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Hillslopes

Parent material: Red bed alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 2 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Coarse-loamy, mixed, superactive, thermic Ustic Haplocambids

Typical Pedon

(taken from the DeBaca County, New Mexico Soil Survey Report)

Map unit in which located: 37, Ima-Gallen association, 2 to 7 percent slopes Location in adjoining survey area: DeBaca County, New Mexico; 1,400 feet west and 20 feet north of the southeast corner of section 27, T. 3 N., R. 26 E.; Latitude: 34 degrees 26 minutes 56 seconds N; Longitude: 104 degrees 11 minutes 54 seconds W.

- Ap—0 to 10 inches; reddish brown (5YR 4/4) fine sandy loam, dark reddish brown (5YR 3/4) moist; moderate fine granular structure; slightly hard, very friable, nonsticky and nonplastic; many fine and very fine roots and common medium roots; strongly effervescent; disseminated calcium carbonate; slightly alkaline; clear smooth boundary.
- Bw—10 to 36 inches; reddish brown (5YR 5/4) fine sandy loam, reddish brown (5YR 4/4) moist; weak coarse prismatic structure parting to weak medium subangular blocky; slightly hard, friable, nonsticky and nonplastic; many fine and very fine roots and common medium roots; strongly effervescent; disseminated calcium carbonate; moderately alkaline; gradual smooth boundary.
- Bk—36 to 40 inches; reddish brown (5YR 5/4) fine sandy loam, reddish brown (5YR 4/4) moist; weak medium subangular blocky structure; slightly hard, friable, nonsticky and nonplastic; common fine and very fine roots and few medium roots; violently effervescent; few thin mycelia and few rounded soft masses of calcium carbonate; moderately alkaline; gradual smooth boundary.
- C—40 to 60 inches; light reddish brown (5YR 6/4) sandy loam, reddish brown (5YR 5/4) moist; massive; slightly hard, friable, nonsticky and nonplastic; common fine and very fine roots and few medium roots; violently effervescent; disseminated calcium carbonate; moderately alkaline.

Range in Characteristics

A horizon:

B horizon:

Hue: 5YR or 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 2 to 4

Hue: 5YR or 7.5YR Value: 4 to 6, 3 to 6 moist Chroma: 3 to 6

Texture: Fine sandy loam, sandy loam, or loam

C horizon:

Hue: 5YR or 7.5YR Value: 5 to 7, 3 to 6 moist

Chroma: 4 to 6

Texture: Fine sandy loam or sandy loam

Kimberson Series

Map unit(s): KmB Depth class: Shallow

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Low hills, plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Loamy, mixed, superactive, thermic, shallow Petrocalcic

Calciustolls

Typical Pedon

Map unit in which located: KmB, Kimberson gravelly loam, 0 to 3 percent slopes Location in survey area: Curry County, New Mexico; 1,600 feet south and 1,900 feet east of the northwest corner of section 30, T. 5 N, R. 33 E.; Latitude: 34 degrees 37 minutes 45 seconds N.; Longitude: 103 degrees 29 minutes 25 seconds W.

- A1—0 to 5 inches; brown (7.5YR 4/2) gravelly loam, dark brown (7.5YR 3/2) moist; weak medium subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; many fine and very fine and common medium roots; common fine and medium pores; 20 percent fragments of calcium carbonate nodules; few fine small masses of calcium carbonate; strongly effervescent; moderately alkaline; abrupt smooth boundary.
- A2—5 to 14 inches; brown (7.5YR 5/3) gravelly loam, dark brown (7.5YR 3/3) moist; weak fine subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; common fine and very fine and few medium roots; common fine pores; 30 percent large and medium concretions of calcium carbonate; violently effervescent; moderately alkaline; abrupt smooth boundary.

Bkm—14 to 20 inches; indurated caliche.

BCk—20 to 80 inches; pink (7.5YR 8/3) gravelly loam, pink (7.5YR 7/3) moist; massive; hard, friable, slightly sticky and slightly plastic; 30 percent fragments of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics

Depth to petrocalcic horizon: 10 to 16 inches

A horizon: Hue: 7.5YR

Value: 3 to 5, 2 or 3 moist

Chroma: 2 or 3

Texture: Gravelly loam

Bkm horizon: Indurated caliche

BCk horizon: Hue: 7.5YR

Value: 7 or 8, 6 or 7 moist

Chroma: 2 to 4

Texture: Sandy loam to clay loam

Lacoca Series

Map unit(s): 10, 28, 32

Depth class: Very shallow to shallow

Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Structural benches

Parent material: Alluvium derived from sandstone and/or residuum weathered from

sandstone

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 5 to 50 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Loamy, mixed, superactive, calcareous, thermic Lithic Ustic

Torriorthents

Typical Pedon

Map unit in which located: 10, Regnier-Rock outcrop-Lacoca complex, 30 to 80 percent slopes

Location in survey area: Quay County, New Mexico; 260 feet south and 1,300 feet east of the northwest corner of section 5, T. 8 N. R. 27 E.; Latitude: 34 degrees 57 minutes 13 seconds N.; Longitude: 104 degrees 06 minutes 25 seconds W.

A1—0 to 3 inches; brown (7.5YR 5/4) fine sandy loam, brown (7.5YR 4/2) moist; weak fine and medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; few very fine and fine roots; few very fine and fine pores; slightly effervescent; moderately alkaline; abrupt wavy boundary.

A2—3 to 8 inches; brown (7.5YR 5/4) fine sandy loam, brown (7.5YR 4/2) moist; weak medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; few very fine and fine roots; few very fine and fine pores; violently effervescent; abrupt smooth boundary.

R-8 to 12 inches; hard sandstone.

Range in Characteristics

Depth to sandstone: 5 to 20 inches

A horizon:

Hue: 2.5YR to 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 3 to 6

Texture: Sandy loam or fine sandy loam

R horizon:

Hardness: 3 or 4 on the Mohs scale

Lazbuddie Series

Map unit(s): LcA
Depth class: Very deep

Drainage class: Moderately well drained Slowest permeability: 0.06 to 0.2 in/hr (slow)

Landform: Playa steps

Parent material: Clayey lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Calcic Haplusterts

Typical Pedon

Map unit in which located: LcA, Lazbuddie clay, 0 to 1 percent slopes Location in survey area: Curry County, New Mexico; 3,200 feet east and 100 feet south of the northwest corner of section 29, T. 8 N., R. 35 E.; Latitude 34 degrees 53 minutes 43 seconds N.; Longitude: 103 degrees 15 minutes 20 seconds W.

- A—0 to 10 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist, moderate, medium subangular blocky structure; extremely hard, very firm, sticky and plastic; many fine roots, common fine and medium pores; strongly effervescent, moderately alkaline; gradual smooth boundary.
- Bss1—10 to 22 inches; gray (10YR 5/1) clay, dark grayish brown (10YR 4/2) moist, moderate, medium subangular blocky structure; extremely hard, very firm, sticky and plastic; common fine roots, few fine and medium pores; few intersecting slickensides; strongly effervescent, moderately alkaline; gradual smooth boundary.
- Bss2—22 to 45 inches; gray (10YR 5/1) clay, dark grayish brown (10YR 4/2) moist, moderate, medium subangular blocky structure; extremely hard, very firm, sticky and plastic; common fine roots, few fine and medium pores; many intersecting slickensides, strongly effervescent, moderately alkaline; gradual smooth boundary.
- Bkss—45 to 80 inches; light brownish gray (10YR 6/2) clay, grayish brown (10YR 5/2) moist, weak medium subangular blocky structure; hard, friable, slightly sticky, slightly plastic, few very fine roots, many fine and medium pores; many fine carbonates disseminated throughout, strongly effervescent, moderately alkaline.

Range in Characteristics

A horizon: Hue: 10YR

Value: 5 to 7, dry 4 to 6 moist

Chroma: 1 or 2

Bss horizon: Hue: 10YR

Value: 5 or 6, 4 or 5 moist

Chroma: 1 to 3 Bkss horizon:

Hue: 10YR Value: 5 to 7, 4 to 6 moist

Chroma: 1 or 2

Lofton Series

Map unit(s): LoA
Depth class: Very deep

Drainage class: Moderately well drained Slowest permeability: 0.06 to 0.2 in/hr (slow)

Landform: Depressions

Parent material: Clayey eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, mixed, superactive, thermic Vertic Argiustolls

Typical Pedon

Map unit in which located: LoA, Lofton clay loam, 0 to 1 percent slopes Location in survey area: Curry County, New Mexico; 2,200 feet west and 2,100 feet north of the southeast corner of section 12, T. 8 N., R. 35 E.; Latitude: 32 degrees 55 minutes 47 seconds N.; Longitude: 103 degrees 11 minutes 10 seconds W.

- A—0 to 6 inches; dark grayish brown (10YR 4/2) clay loam, very dark grayish brown (10YR 3/2) moist; weak fine granular structure; slightly hard, friable, slightly sticky and slightly plastic; few very fine and fine roots; few very fine and fine pores; slightly alkaline; clear wavy boundary.
- Bt1—6 to 14 inches; dark grayish brown (10YR 4/2) silty clay, very dark grayish brown (10YR 3/2) moist; moderate medium prismatic structure parting to moderate fine and medium angular blocky; hard, friable, sticky and plastic; many slickensides; many distinct clay films on faces of peds; few very fine and fine roots; few very fine pores; slightly alkaline; gradual wavy boundary.
- Bt2—14 to 25 inches; grayish brown (10YR 5/2) silty clay, very dark grayish brown (10YR 3/2) moist; strong angular blocky structure; hard, friable, sticky and plastic; many slickensides; many distinct clay films on faces of peds; few very fine roots and few very fine pores; slightly alkaline, violently effervescent; gradual smooth boundary.
- Btk—25 to 50 inches; yellowish brown (10YR 5/4) clay loam, dark yellowish brown (10YR 4/4) moist; moderate medium blocky structure; very hard, firm, sticky and plastic; few to common distinct clay films on faces of peds; common films and threads, few medium masses of calcium carbonate; few fine roots and few fine pores; strongly alkaline and strongly effervescent; gradual smooth boundary.
- Bk—50 to 80 inches; yellowish brown (10YR 5/4) clay loam, dark yellowish brown (10YR 4/4) moist; weak medium blocky structure; very hard, firm, sticky and plastic; common masses of calcium carbonate; strongly alkaline, violently effervescent.

Range in Characteristics

Thickness of the mollic epipedon: 7 to 34 inches Depth to visible carbonates: 20 to 40 inches

A horizon:

Hue: 10YR or 2.5Y Value: 3 or 4, 2 or 3 moist

Chroma: 1 or 2

Bt horizon:

Hue: 10YR or 2.5Y

Value: 4 or 5, 3 or 4 moist

Chroma: 1 to 3

Texture: Silty clay or clay

Btk and Bk horizon:

Hue: 10YR

Value: 5 to 7, 4 to 6 moist

Chroma: 2 to 4 Texture: Clay loam

McLean Series

Map unit(s): McA
Depth class: Very deep

Drainage class: Somewhat poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Landform: Playa floors

Parent material: Clayey lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Udic Haplusterts

Typical Pedon

Map unit in which located: McA, McLean clay, 0 to 1 percent slopes; occasionally ponded

Location in survey area: Quay County, New Mexico; about 1 miles south of Jordan, New Mexico; 600 feet east and 400 feet south of the northwest corner of section 2, T. 6 N., R. 29 E.; Latitude: 34 degrees 46 minutes 47 seconds N.; Longitude: 103 degrees 50 minutes 38 seconds W.

- A1—0 to 6 inches; dark grayish brown (10YR 4/2) clay, very dark grayish brown (10YR 3/2) moist; moderate medium subangular blocky structure; slightly hard, firm, sticky and plastic; common fine and very fine roots; common very fine and fine pores; strongly effervescent; slightly alkaline; clear wavy boundary.
- Bss1—6 to 23 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; strong, moderate angular blocky structure with wedge-shaped aggregates; very hard, very firm, sticky and plastic; common fine and medium roots; common very fine pores; strongly effervescent; few fine masses of calcium carbonate; moderately alkaline; clear wavy boundary.
- Bss2—23 to 41 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; strong medium angular blocky structure with wedge-shaped aggregates; very hard, very firm, sticky and plastic; few very fine and fine roots; common very fine pores; violently effervescent: few fine masses and concretions of calcium carbonate; slightly alkaline; gradual wavy boundary.
- Bkss1—41 to 62 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; strong angular blocky structure with wedge-shaped aggregates; very hard, very firm, sticky and plastic; few very fine pores; common fine and medium distinct light brownish gray (2.5YR 6/2) iron concentrations; violently effervescent; few fine

masses and concretions of calcium carbonate; slightly alkaline; clear wavy boundary.

Bkss2—62 to 71 inches; light brownish gray (2.5Y 6/2) clay, grayish brown (2.5Y 5/2) moist; moderate medium angular blocky structure with wedge-shaped aggregates; very hard, very firm, sticky and plastic; few fine faint dark gray (10YR 4/1) iron depletions; violently effervescent, few fine soft masses and concretions of calcium carbonate; moderately alkaline; gradual wavy boundary.

Bkss3—71 to 80 inches; light brownish gray (2.5Y 6/2) clay, grayish brown (2.5Y 5/2) moist; moderate medium angular blocky structure with wedge-shaped aggregates; very hard, very firm, sticky and plastic; common prominent brownish yellow (10YR 6/8) iron coatings on faces of peds and root channels; violently effervescent, few fine soft masses and concretions of calcium carbonate; moderately alkaline; gradual wavy boundary.

Range in Characteristics

A horizon: Hue: 10YR

Value: 3 or 4, 2 or 3 moist

Chroma: 1 or 2

Redoximorphic features: None to few

Bss horizon: Hue: 10YR or 2.5Y Value: 3 to 6, 2 to 5 moist

Chroma: 1 or 2

Redoximorphic features: None to common

Bkss horizon: Hue: 10YR or 2.5Y Value: 4 to 8, 3 to 7 moist

Chroma: 1 or 2

Redoximorphic features: None to common in the form of iron-manganese concretions

or oxidized rhizospheres

Milsand Series

Map unit(s): MsD, MsE Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid)

Landform: Dunes

Parent material: Sandy eolian deposits

Elevation: 4,100 to 5,420 feet (1,250 to 1,651 meters)

Slope: 1 to 20 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Mixed, thermic Aridic Ustipsamments

Typical Pedon

Map unit in which located: MsE, Milsand-Arch complex, 1 to 20 percent slopes Location in survey area: Curry County, New Mexico; 1,200 feet south and 2,000 feet west of the northeast corner of section 5, T. 1 N., R. 31 E.; Latitude: 34 degrees 20 minutes 37 seconds N.; Longitude:103 degrees 41 minutes 08 seconds W.

- A—0 to 8 inches; pale brown (10YR 6/3) fine sand, brown (10YR 5/3) moist; single grain; loose, nonsticky and nonplastic; many fine and medium roots; common fine and medium pores; disseminated calcium carbonate; violently effervescent; moderately alkaline; gradual wavy boundary.
- C—8 to 30 inches; pale brown (10YR 6/3) fine sand, brown (10YR 5/3) moist; single grain; soft, loose, nonsticky and nonplastic; common fine and medium and few large roots; few very fine and medium pores; disseminated calcium carbonate; violently effervescent; strongly alkaline; abrupt smooth boundary.
- Ab—30 to 37 inches; light brownish gray (10YR 6/2) fine sand, grayish brown (10YR 5/2) moist; single grain; soft, loose, nonsticky and nonplastic; common, very fine and fine roots; few very fine and medium pores; disseminated calcium carbonate; violently effervescent; strongly alkaline; gradual wavy boundary.
- Cb—37 to 80 inches; pale brown (10YR 6/3) fine sand, pale brown (10YR 6/3) moist; single grain; soft, loose, nonsticky and nonplastic; common, very fine and fine roots; few very fine and medium pores; disseminated calcium carbonate; violently effervescent; strongly alkaline.

Range in Characteristics

Depth to carbonates: At the surface

A, Ab, C or Cb horizon: Hue: 7.5YR or 10YR Value: 5 to 7, 4 to 6 moist

Chroma: 2 to 4

Texture: Sand or fine sand

Mobeetie Series

Map unit(s): PMG
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Scarp slopes, valley sides Parent material: Loamy colluvium

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 3 to 45 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Coarse-loamy, mixed, superactive, thermic Aridic Haplustepts

Typical Pedon

Map unit in which located: PMG, Potter-Mobeetie association, 3 to 45 percent slopes Location in survey area: Curry County, New Mexico; 900 feet west and 100 feet north of the southeast corner of section 36, T. 7 N., R. 36 E.; Latitude: 34 degrees 46 minutes 40 seconds N.; Longitude: 103 degrees 04 minutes 34 seconds W.

A—0 to 12 inches; grayish brown (10YR 5/2) fine sandy loam, dark grayish brown (10YR 4/2) moist; weak medium granular structure; hard, very friable, nonsticky and nonplastic; common fine roots, few fine pores; 5 to 10 percent caliche pebbles, strongly effervescent, moderately alkaline, clear, smooth boundary.

Bw—12 to 16 inches; pinkish gray (7.5YR 6/2) fine sandy loam, brown (7.5YR 5/4) moist; weak medium subangular blocky structure; slightly hard, friable,

slightly sticky and nonplastic; few fine roots and few fine pores; about 5 percent caliche pebbles, strongly effervescent; moderately alkaline, clear, smooth boundary.

Bk1—16 to 26 inches; pink (7.5YR 7/3) fine sandy loam, light brown (7.5YR 6/3) moist; weak medium subangular blocky structure; slightly hard, friable, slightly sticky, nonplastic; few fine roots, few fine pores; few masses of calcium carbonate, violently effervescent, strongly alkaline, clear, smooth boundary.

Bk2—26 to 80 inches; light brown (7.5YR 6/4) fine sandy loam, brown (7.5YR 5/4) moist; weak fine and medium subangular blocky structure; soft, friable, nonsticky and nonplastic; few fine roots, few fine pores; few fine masses of calcium carbonates, violently effervescent, strongly alkaline.

Range in Characteristics

A horizon: Hue: 10YR

Value: 4 or 5, 3 or 4 moist

Chroma: 2 or 3

Bw horizon:

Hue: 7.5YR or 10YR Value: 5 or 6, 4 or 5 dry

Chroma: 2 to 6

Bk horizon: Hue: 7.5YR

Value: 6 or 7, 5 or 6 moist

Chroma: 2 to 4

Texture: Fine sandy loam or gravelly sandy loam

Nutivoli Series

Map unit(s): NtC, NtD Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid)

Landform: Dunes

Parent material: Eolian sands

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 3 to 12 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Mixed, thermic Aridic Ustipsamments

Typical Pedon

Map unit in which located: NtD, Nutivoli fine sand, 5 to 12 percent slopes Location in survey area: Curry County, New Mexico; 2,800 feet south and 700 feet east of the northwest corner of section 20, T. 2 N., R. 33 E.; Latitude: 34 degrees 22 minutes 30 seconds N.; Longitude: 103 degrees 30 minutes 32 seconds W.

A—0 to 6 inches; brown (7.5YR 5/4) fine sand, brown (7.5YR 4/4) moist; single grain; soft, loose, nonsticky and nonplastic; many fine and few medium roots; few very fine pores; slightly alkaline; gradual smooth boundary.

C1—6 to 24 inches; strong brown (7.5YR 5/6) fine sand, strong brown (7.5YR 4/6) moist; single grain; soft, loose, nonsticky and nonplastic; few medium

- roots; many fine and very fine pores; slightly alkaline; gradual smooth boundary.
- C2—24 to 37 inches; brown (7.5YR 4/4) fine sand, dark brown (7.5YR 3/4) moist; single grain; soft, loose, nonsticky and nonplastic; few medium roots; many very fine and fine pores; slightly alkaline; gradual smooth boundary.
- C3—37 to 50 inches; strong brown (7.5YR 4/6) loamy fine sand, strong brown (7.5YR 4/6) moist; weak very coarse subangular blocky structure; soft, very friable, nonsticky and nonplastic; few medium roots; many very fine and fine pores; slightly alkaline; gradual smooth boundary.
- C4—50 to 80 inches; strong brown (7.5YR 5/6) fine sand, strong brown (7.5YR 4/6) moist; single grain; soft, loose, nonsticky and nonplastic; few medium roots; many very fine and fine pores; slightly alkaline; gradual smooth boundary.

Range in Characteristics

A horizon: Hue: 7.5YR

Value: 5 or 6, 4 or 5 moist

Chroma: 4 to 7

C horizon: Hue: 5YR or 7.5YR Value: 4 or 5. 3 or 4 moist

Chroma: 4 to 6

Texture: Fine sand or loamy fine sand

Olton Series

Map unit(s): OcB, OcA
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, mixed, superactive, thermic Aridic Paleustolls

Typical Pedon

Map unit in which located: OcA, Olton clay loam, 0 to 1 percent slopes Location in survey area: Curry County, New Mexico; 600 feet south and 1,100 feet east of the northwest corner of section 2, T. 7 N., R. 36 E.; Latitude: 34 degrees 51 minutes 46 seconds N.; Longitude: 103 degrees 06 minutes 15 seconds W.

- Ap—0 to 6 inches; dark brown (10YR 3/3) clay loam, very dark brown (10YR 2/2) moist; weak fine and medium granular structure; hard, friable, slightly sticky and slightly plastic; common fine and medium roots, few fine and medium interstitial pores; slightly alkaline; abrupt smooth boundary.
- Bt—6 to 17 inches; brown (7.5YR 4/2) clay, dark brown (7.5YR 3/2) moist; strong fine and medium angular blocky structure; very hard, firm, sticky and plastic; common fine and medium roots, few fine and medium tubular and interstitial

pores; many distinct clay films on faces of peds and lining pores; slightly alkaline; clear smooth boundary.

Btk1—17 to 26 inches; brown (7.5YR 5/4) clay loam, brown (7.5YR 4/4) moist; strong fine and medium angular blocky structure; very hard, firm, sticky and plastic; common fine roots, common fine and medium tubular pores; many distinct clay films on faces of peds and lining pores; common fine irregular-shaped masses of calcium carbonate; slightly effervescent, strongly alkaline; clear smooth boundary.

Btk2—26 to 35 inches; reddish brown (5YR 5/4) clay loam, yellowish red (5YR 5/6) moist; moderate fine and medium subangular structure; hard, friable, sticky and plastic; common fine roots, few fine and medium tubular pores; common distinct clay films on faces of peds and lining pores; many fine irregular-shaped masses of calcium carbonate; slightly effervescent, strongly alkaline; clear smooth boundary.

Btk3—35 to 41 inches; yellowish red (5YR 5/6) clay loam, yellowish red (5YR 5/6) moist; moderate medium prismatic structure parting to moderate fine and medium subangular; hard, friable, sticky and plastic; common fine roots, common fine and medium tubular pores; common distinct clay films on faces of peds and lining pores; many fine irregular-shaped masses of calcium carbonate; slightly effervescent; moderately alkaline; clear smooth boundary.

Btk4—41 to 59 inches; pink (5YR 7/3) clay loam, light reddish brown (5YR 6/4) moist; moderate coarse prismatic structure parting to weak medium subangular; hard, friable, slightly sticky and slightly plastic; few fine roots, common fine and medium tubular pores; common distinct clay films on faces of peds and lining pores; many fine irregular-shaped masses of calcium carbonate; violently effervescent, moderately alkaline; gradual wavy boundary.

Btk5—59 to 80 inches; reddish yellow (5YR 6/6) clay loam yellowish red (5YR 5/6) moist; moderate medium subangular structure; very hard, firm, slightly sticky and slightly plastic; few fine roots; many fine and medium tubular pores; common distinct clay films on faces of peds and lining pores; common medium masses of calcium carbonate; violently effervescent; moderately alkaline.

Range of characteristics

Thickness of mollic epipedon: 12 to 26 inches

Depth to carbonates: 14 to 28 inches

A horizon:

Hue: 5YR to 10YR

Value: 3 or 4, 2 or 3 moist

Chroma: 2 or 3

Bt horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 4

Texture: Clay loam or clay

Btk horizon:

Hue: 5YR or 7.5YR Value: 5 to 7, 4 to 6 moist

Chroma: 3 to 6

Pep Series

Map unit(s): PcB, PcA, PeB, PeA

Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Calciustolls

Typical Pedon

Map unit in which located: PeB, Pep loam, 1 to 3 percent slopes Location in survey area: Curry County, New Mexico; 1,400 feet south and 900 feet east of the northwest corner of section 19, T. 37 E., R. 3 N.; Latitude: 34 degrees 49 minutes 02 seconds N.; Longitude: 103 degrees 10 minutes 32 seconds W.

- A1—0 to 6 inches; brown (10YR 4/3) loam, dark brown (10YR 3/3) moist; weak fine subangular blocky structure; soft, very friable, slightly sticky and slightly plastic; few very fine and fine roots; few very fine and fine pores; strongly effervescent; slightly alkaline; clear smooth boundary.
- A2—6 to 14 inches; dark grayish brown (10YR 4/2) loam, very dark grayish brown (10YR 3/2) moist; moderate medium subangular blocky structure; slightly hard, friable, sticky and plastic; few very fine and fine roots; few very fine and fine pores; strongly effervescent; slightly alkaline; clear smooth boundary.
- Bw—14 to 30 inches; brown (7.5YR 5/4) loam, brown (7.5YR 4/4) moist; moderate medium subangular blocky structure; common very fine and fine roots; few very fine and fine pores; strongly effervescent; moderately alkaline; clear smooth boundary.
- Bk1—30 to 40 inches; light brown (7.5YR 6/4) clay loam, brown (7.5YR 5/4) moist; moderate medium subangular blocky structure; slightly hard, friable, slightly sticky and slightly plastic; few very fine and fine roots; few very fine and fine pores; common fine and medium masses of calcium carbonate; violently effervescent; moderately alkaline; gradual irregular boundary.
- Bk2—40 to 80 inches; light brown (7.5YR 6/4) clay loam, brown (7.5YR 5/4) moist; weak medium subangular blocky structure; hard, friable, slightly sticky and slightly plastic; few fine pores; common fine threads of calcium carbonate; strongly effervescent; moderately alkaline.

Range in Characteristics

Thickness of the mollic epipedon: 10 to 20 inches

A horizon:

Hue: 7.5YR or 10YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 or 3

Texture: Loam or clay loam

Bw horizon: Hue: 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 2 to 4

Texture: Loam or clay loam

Bk horizon: Hue: 7.5YR

Value: 6 to 8, 5 to 7 moist

Chroma: 2 to 4

Texture: Loam or clay loam

Portales Series

Map unit(s): PoA
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa steps

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Aridic Calciustolls

Typical Pedon

Map unit in which located: PoA, Portales loam, 0 to 1 percent slopes
 Location in survey area: Quay County, New Mexico; 1,500 feet north and 800 feet
 west of the southeast corner of section 25, T. 6 N., R. 30 E.; Latitude: 34 degrees
 42 minutes 42 seconds N.; Longitude: 103 degrees 42 minutes 27 seconds W.

- A—0 to 15 inches; dark grayish brown (10YR 4/2) loam, very dark grayish brown (10YR 3/2) moist; moderate medium subangular blocky structure parting to moderate medium granular; soft, very friable, slightly sticky and slightly plastic; many fine roots, common fine pores; few fine masses of calcium carbonate; violently effervescent; moderately alkaline; clear smooth boundary.
- Bk1—15 to 35 inches; grayish brown (10YR 5/2) clay loam, dark grayish brown (10YR 4/2) moist; weak coarse prismatic structure; soft, very friable, slightly sticky and slightly plastic; few fine roots; many very fine and fine pores; few fine masses and disseminated calcium carbonate; violently effervescent; moderately alkaline; gradual smooth boundary.
- Bk2—35 to 43 inches; light brownish gray (10YR 6/2) loam, grayish brown (10YR 5/2) moist; weak coarse prismatic structure; soft, very friable, slightly sticky and slightly plastic; few fine masses and disseminated calcium carbonate; violently effervescent; moderately alkaline; gradual smooth boundary.
- Bk3—43 to 60 inches; light gray (10YR 7/2) clay loam, light brownish gray (10YR 6/2) moist; weak medium and coarse subangular blocky structure; hard, firm, slightly sticky and slightly plastic; common fine masses and disseminated calcium carbonate; violently effervescent; moderately alkaline.
- Bk4—60 to 80 inches; very pale brown (10YR 8/2) clay loam, light gray (10YR 7/2) moist; weak medium and coarse subangular blocky structure; hard, firm, slightly sticky and slightly plastic; common fine masses of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics:

Depth to calcic horizon: 5 to 15 inches

A horizon: Hue: 10YR

Value: 3 to 5, 2 or 3 moist

Chroma: 2 or 3

Bk horizon:

Hue: 10YR or 2.5Y Value: 5 to 8, 4 to 7 moist

Chroma: 2 to 5

Texture: Loam or clay loam

Posey Series

Map unit(s): PsA, PsB, PsC Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Plains, playa slopes

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 8 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Calcidic Paleustalfs

Typical Pedon

Map unit in which located: PsB, Posey fine sandy loam, 1 to 3 percent slopes Location in survey area: Curry County, New Mexico; 900 feet south and 1,300 feet west of the northeast corner of section 24, T. 5 N., R. 32 E.; Latitude: 34 degrees 38 minutes 44 seconds N.; Longitude: 103 degrees 29 minutes 57 seconds W.

- Ap—0 to 5 inches; brown (7.5YR 4/4); fine sandy loam, dark brown (7.5YR 3/4); moist; weak fine granular structure; slightly hard, very friable, slightly sticky and slightly plastic; many very fine and fine roots; many very fine and fine pores; disseminated calcium carbonate; strongly effervescent, moderately alkaline; abrupt smooth boundary.
- Btk1—5 to 9 inches; dark yellowish brown (10YR 4/4) clay loam, dark yellowish brown (10YR 3/4) moist; weak medium subangular blocky structure; hard, very friable, slightly sticky and slightly plastic; common very fine and fine roots; common fine and few coarse pores; violently effervescent; moderately alkaline; clear smooth boundary.
- Btk2—9 to 15 inches; brown (7.5YR 5/4) clay loam, brown (7.5YR 4/4) moist; weak medium subangular blocky structure; very hard, firm, slightly sticky and slightly plastic; common very fine and fine roots; few fine pores; few faint clay films lining pores; few fine filaments of calcium carbonate on surface of peds; violently effervescent; moderately alkaline; clear wavy boundary.
- Btk3—15 to 33 inches; brown (7.5YR 5/4) clay loam, brown (7.5YR 4/4) moist; weak coarse prismatic structure parting to moderate medium subangular blocky; very hard, firm, sticky and plastic; few fine and few coarse roots; common fine and few very fine pores; few faint clay films lining pores; disseminated calcium carbonate; few fine filaments, concretions and faint

coatings of calcium carbonate on surface of peds; violently effervescent; moderately alkaline; clear wavy boundary.

Btk4—33 to 49 inches; pink (7.5YR 7/4) clay loam, strong brown (7.5YR 5/6) moist; moderate fine subangular blocky structure; very hard, firm, sticky and plastic; few fine roots; few very fine and fine pores; few faint clay films in pores and root channels; many distinct medium masses of calcium carbonate; violently effervescent; moderately alkaline; clear wavy boundary.

Btk5—49 to 80 inches; pink (7.5YR 7/4) sandy clay loam, strong brown (7.5YR 5/6) moist; weak fine subangular blocky structure; very hard, firm, sticky and plastic; few fine roots; few very fine and fine pores; few faint clay films in pores; common distinct medium masses of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics

Depth to carbonates: At the surface

A horizon:

Hue: 7.5YR or 10YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 4

Btk horizon: Hue: 5YR to 10YR

Value: 4 to 7, 3 to 6 moist

Chroma: 4 to 6

Texture: Sandy clay loam or clay loam

Potter Series

Map unit(s): PMG
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Ridges, scarp slopes Parent material: Loamy alluvium

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 3 to 30 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Loamy-skeletal, carbonatic, thermic Petronodic Ustic Haplocalcids

Typical Pedon

Map unit in which located: PMG, Potter-Mobeetie association, 8 to 45 percent slopes Location in survey area: Curry County, New Mexico; 1,600 feet east and 1,600 feet south of the northwest corner of section 30, T. 5 N., R. 33 E.; Latitude: 34 degrees 37 minutes 45 seconds N.; Longitude: 103 degrees 27 minutes 24 seconds W.

A—0 to 4 inches; brown (7.5YR 5/4) loam, dark brown (7.5YR 4/4) moist; weak fine and medium subangular structure; soft, very friable, nonsticky and nonplastic; few medium and many fine roots; many fine interstitial pores; 5 percent caliche pebbles; strongly effervescent, moderately alkaline; clear, wavy boundary.

- Bk—4 to 9 inches; brown (7.5YR 5/4) gravelly loam, dark brown (7.5YR 4/4) moist; weak fine subangular structure; soft, very friable, slightly sticky and slightly plastic; few medium and common fine roots; many fine interstitial and few fine tubular pores; 20 percent caliche pebbles; violently effervescent, moderately alkaline, abrupt wavy boundary.
- BCk—9 to 19 inches; pink (7.5YR 8/3) gravelly loam, light brown (7.5YR 6/3) moist; weak coarse subangular blocky structure; slightly hard, friable, slightly sticky and slightly plastic; few fine and medium roots; few coarse tubular and common fine interstitial pores; 35 percent caliche fragments; violently effervescent, moderately alkaline; abrupt smooth boundary.
- C—19 to 80 inches; pinkish white (7.5YR 8/2) extremely cobbly loam, pink (7.5YR 7/4) moist; cobbles consist of fragments of 75 percent fractured and unweathered caliche.

Range in Characteristics

Depth to fractured caliche: 9 to 16 inches

A horizon:

Hue: 7.5YR or 10YR Value: 4 to 6, 3 to 5 moist

Chroma: 2 to 4

Content of coarse fragments: 5 to 10 percent

Bk horizon:

Hue: 7.5YR or 10YR Value: 5 or 6, 4 or 5 moist

Chroma: 2 to 4 Texture: Loam

Content of coarse fragments (by volume): 15 to 30 percent

BCk and C horizon: Hue: 7.5YR or 10YR Value: 7 or 8, 6 or 7 moist

Chroma: 1 to 3

Texture: Fine sandy loam or loam

Content of coarse fragments (by volume): 35 to 75 percent

Ranco Series

Map unit(s): RcA
Depth class: Very deep

Drainage class: Poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Landform: Playa floors

Parent material: Clayev lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Ustic Epiaquerts

Typical Pedon

Map unit in which located: RcA, Ranco clay, 0 to 1 percent slopes; frequently ponded Location in survey area: About 11 miles east of Fields, New Mexico; 300 feet east and 1,000 feet north of the southwest corner of section 27, T. 5 N., R. 34 E.;

Latitude: 34 degrees 37 minutes 18 seconds N.; Longitude: 103 degrees 20 minutes 06 seconds W.

- A—0 to 5 inches; dark gray (10YR 4/1) clay, very dark gray (10YR 3/1) moist; moderate medium subangular blocky structure parting to moderate fine granular; very hard, firm, sticky and plastic; few large and many fine roots; common fine pores; few fine masses of iron accumulation on ped surfaces; slightly alkaline; clear smooth boundary.
- Bw—5 to 12 inches; very dark gray (10YR 3/1) clay, very dark gray (10YR 3/1) moist; moderate medium prismatic structure parting to moderate medium angular; very hard, very firm, sticky and plastic; few large and common fine roots; common very fine pores; many pressure faces; few fine masses of iron accumulation on ped surfaces; moderately alkaline; clear wavy boundary.
- Bss1—12 to 58 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; moderate medium prismatic structure parting to moderate medium angular blocky; very hard, very firm, sticky and plastic; few fine roots; common very fine pores; many pressure faces; few prominent slickensides; few fine faint iron-manganese concretions; slightly alkaline; gradual wavy boundary.
- Bss2—58 to 80 inches; grayish brown (10YR 5/2) clay, dark grayish brown (10YR 4/2) moist; moderate medium prismatic structure parting to moderate medium angular blocky; very hard, firm, sticky and plastic; few fine roots; few very fine roots; many pressure faces and prominent slickensides; few fine faint ironmanganese concretions; slightly alkaline.

Range in Characteristics

A horizon: Hue: 10YR

Value: 3 or 4, 2 or 3 moist

Chroma: 1

Redoximorphic accumulations: Masses of iron-manganese and oxidized

rhizospheres range from few to many

Redoximorphic depletions: Iron depletions on faces of peds and in root pores range from none to common

Bw horizon: (where present)

Hue: N to 2.5Y

Value: 4 to 7, 3 to 6 moist. Note: After periods of prolonged saturation some pedons

have neutral colors with moist color value of 4 to 6

Chroma: 1 or less

Redoximorphic accumulations: Masses of iron-manganese and oxidized

rhizospheres range from few to many

Redoximorphic depletions: Iron depletions on faces of peds and in root pores range from none to common

from none to comm

Bss horizon: Hue: 10YR

Value: 5 to 7, 4 to 6 moist

Chroma: 1 or 2

Randall Series

Map unit(s): RaA
Depth class: Very deep

Drainage class: Poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Landform: Playa floors

Parent material: Clayey lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Ustic Epiaquerts

Typical Pedon

Map unit in which located: RaA, Randall clay, 0 to 1 percent slopes, frequently ponded

Location in survey area: About 7 miles east of Fields, New Mexico; 1,750 feet east and 1,800 feet south of the northwest corner of section 29, T. 5 N., R. 32 E.; Latitude: 34 degrees 37 minutes 37 seconds N.; Longitude: 103 degrees 28 minutes 15 seconds W.

- A1—0 to 4 inches; dark gray (10YR 4/1) clay, black (10YR 2/1) moist; weak fine angular blocky structure parting to moderate fine granular; hard, firm, sticky and plastic; few large and many fine roots; common fine pores; few fine masses of iron accumulation on ped surfaces; slightly alkaline; abrupt wavy boundary.
- A2—4 to 17 inches; very dark gray (10YR 3/1) clay, very dark gray (10YR 3/1) moist; weak moderate angular blocky structure; very hard, firm, sticky and plastic; few large and common fine roots; common very fine pores; many pressure faces; few fine masses of iron accumulation on ped surfaces; moderately alkaline; gradual wavy boundary.
- Bss1—17 to 28 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; moderate fine and medium angular blocky structure; very hard, firm, sticky and plastic; few fine roots; common very fine pores; many pressure faces; few prominent slickensides; few fine faint iron-manganese concretions; slightly alkaline; gradual wavy boundary.
- Bss2—28 to 40 inches; gray (10YR 5/1) clay, dark grayish brown (10YR 4/2) moist; moderate fine and medium angular blocky structure; very hard, firm, sticky and plastic; few fine roots; few very fine roots; many pressure faces and prominent slickensides; few fine faint iron-manganese concretions; slightly alkaline; clear wavy boundary.
- Bss3—40 to 80 inches; grayish brown (10YR 5/2) clay, dark grayish brown (10YR 4/2) moist; weak coarse angular blocky structure; very hard, firm, sticky and plastic; many pressure faces and prominent slickensides; common soft masses of calcium carbonate lining peds; violently effervescent, moderately alkaline.

Range in Characteristics

A horizon: Hue: 10YR

Value: 3 or 4, 2 or 3 moist

Chroma: 1

Redoximorphic concentrations: Few to many

Bss horizon: Hue: 10YR Value: 5, 4 moist Chroma: 1 or 2

Redona Series

Map unit(s): 13, 31, 58, 60 Depth class: Very deep Drainage class: Well drained

Slowest permeability: 0.6 to 2.0 in/hr (moderate)

Landform: Alluvial flats, pediments

Parent material: Red bed alluvium derived from sandstone and shale, red bed eolian

and alluvium derived from sandstone and shale *Elevation:* 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 0 to 5 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Ustic Calciargids

Typical Pedon

Map unit in which located: 13, Tucumcari-Redona association, 0 to 5 percent slopes Location in survey area: Quay County, New Mexico; 2,400 feet south and 950 feet west of the northeast corner of section 16, T. 8 N., R. 27 E.; Latitude: 34 degrees 55 minutes 09 seconds N.; Longitude: 104 degrees 04 minutes 57 seconds W.

- A—0 to 4 inches; brown (7.5YR 5/4) fine sandy loam, dark brown (7.5YR 3/4) moist; weak fine subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; many fine and very fine roots; common fine tubular pores; slightly alkaline; abrupt smooth boundary.
- Bt—4 to 22 inches; reddish brown (5YR 4/4) loam, reddish brown (5YR 4/4) moist; weak coarse prismatic structure parting to moderate fine and medium subangular blocky; slightly hard, very friable, slightly sticky and slightly plastic; many fine and very fine roots; few very fine tubular pores; slightly alkaline; gradual smooth boundary.
- Bk1—22 to 48 inches; reddish brown (5YR 5/4) loam, reddish brown (5YR 4/4) moist; weak medium and coarse subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; few fine roots; few fine tubular pores; common fine and medium masses of calcium carbonate; violently effervescent; slightly alkaline; abrupt smooth boundary.
- Bk2—48 to 80 inches; pink (5YR 8/4) loam, pink (5YR 7/4) moist; massive; hard, very friable, slightly sticky and slightly plastic; many large masses of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics

Depth to calcic horizon: 20 to 40 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 4

Texture: Fine sandy loam or sandy clay loam

Bt horizon:

Hue: 2.5YR or 5YR Value: 4 to 6, 3 to 5 moist

Chroma: 4 to 6

Texture: Loam or sandy clay loam

Bk horizon:

Hue: 2.5YR or 5YR Value: 5 to 8, 3 to 7 moist

Chroma: 3 to 6

Texture: Loam or sandy clay loam

Regnier Series

Map unit(s): 10, 32 Depth class: Shallow

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Pediments, scarp slopes

Parent material: Colluvium and slope alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 3 to 80 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Loamy, mixed, superactive, calcareous, thermic, shallow Ustic

Torriorthents

Typical Pedon

Map unit in which located: 10, Regnier-Rock outcrop-Lacoca complex, 30 to 80 percent slopes

Location in survey area: Quay County, New Mexico; 1,400 feet south and 1,700 feet east of the northwest corner of section 3, T. 8 N., R. 27 E.; Latitude: 34 degrees 57 minutes 01 seconds N.; Longitude: 104 degrees 03 minutes 46 seconds W.

- A—0 to 2 inches; brown (7.5YR 5/4) loam, brown (7.5YR 4/4) moist; weak fine subangular blocky structure; slightly hard, very friable, slightly sticky and slightly plastic; common very fine and fine roots; few very fine and fine pores: disseminated carbonates; violently effervescent; abrupt smooth boundary.
- C—2 to 13 inches; brown (7.5YR 5/4) clay loam, brown (7.5YR 4/4) moist; massive; slightly hard, friable, slightly sticky and slightly plastic; few very fine and fine roots; few very fine and fine pores; disseminated carbonates; violently effervescent: abrupt smooth boundary.

Cr—13 to 17 inches; reddish brown (2.5YR 4/4) weathered shale.

Range in Characteristics

Depth to shale: 12 to 20 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4 to 6, 3 to 5 moist Chroma: 4 through 6

Texture: Loam, sandy clay loam, or gravelly loam

C horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 4 to 6

Texture: Loam or clay loam

Cr horizon: Consists or weathered shale interlayered with some sandstone

Roswell Series

Map unit(s): 61

Depth class: Very deep

Drainage class: Excessively drained Slowest permeability: 6.0 to 20 in/hr (rapid)

Landform: Dunes

Parent material: Eolian sands derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 5 to 15 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Mixed, thermic Ustic Torripsamments

Typical Pedon

(taken from the DeBaca County, New Mexico Soil Survey Report)

Map unit in which located: 61, Berwolf-Roswell association, 1 to 15 percent slopes Location in adjoining survey area: About 12 miles south of Taiban, DeBaca County, New Mexico; 1,800 feet east and 1,100 feet north of southwest corner of section 36, T. 1 N., R. 27 E.; Latitude: 34 degrees 15 minutes 51 seconds N.; Longitude: 104 degrees 03 minutes 56 seconds W.

- A—0 to 8 inches; brown (7.5YR 5/4) fine sand, brown (7.5YR 4/4) moist; single grain; loose; many fine and very fine roots; slightly alkaline; gradual smooth boundary.
- C—8 to 60 inches; light reddish brown (5YR 6/4) fine sand, reddish brown (5YR 5/4) moist; single grain; loose; common fine and very fine roots; moderately alkaline.

Range in Characteristics

Depth to carbonates: Greater than 60 inches

A horizon:

Hue: 5YR or 7.5YR Value: 5 or 6, 4 or 5 moist

Chroma: 4 to 6

C horizon:

Value: 5 or 6, 4 or 5 moist

Chroma: 4 to 6

San Jon Series

Map unit(s): 28

Depth class: Moderately deep Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Structural benches

Parent material: Red bed eolian and alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 5 to 20 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine-loamy, mixed, superactive, thermic Ustic Haplocalcids

Typical Pedon

Map unit in which located: 28, Lacoca-San Jon-Rock outcrop complex, 5 to 20 percent slopes

- Location in survey area: Quay County, New Mexico; 2,050 feet west and 445 feet north of the southeast corner of section 19, T. 6 N., R. 27 E.; Latitude: 34 degrees 43 minutes 36 seconds N.; Longitude: 104 degrees 07 minutes 09 seconds W.
 - A—0 to 4 inches; reddish brown (5YR 5/4) fine sandy loam, reddish brown (5YR 4/4) moist; very fine and fine subangular blocky parting to very fine granular structure; slightly hard, very friable, slightly sticky and slightly plastic; many very fine and fine roots; few very fine pores; slightly alkaline; gradual smooth boundary.
 - Bw—4 to 20 inches; reddish brown (5YR 4/4) loam, reddish brown (5YR 4/4) moist; moderate medium and coarse subangular blocky parting to moderate fine and medium subangular blocky structure; hard, friable, slightly sticky and slightly plastic; few very fine and fine roots; few very fine pores; slightly alkaline; gradual smooth boundary.
 - Bk1—20 to 28 inches; reddish yellow (5YR 6/6) sandy clay loam, yellowish red (5YR 5/6) moist; weak medium subangular blocky structure; hard, friable, slightly sticky and plastic; few very fine pores; strongly effervescent; moderately alkaline; abrupt smooth boundary.
 - Bk2—28 to 35 inches; pink (5YR 7/4) loam, light reddish brown (5YR 6/4) moist; weak medium subangular blocky structure; hard, friable, slightly sticky and slightly plastic; common very fine and fine masses of calcium carbonate; violently effervescent; moderately alkaline; abrupt smooth boundary.
 - R—35 to 60 inches; sandstone bedrock.

Range in Characteristics

Depth to interbedded sandstone, shale, and siltstone: 20 to 40 inches

A horizon:

Hue: 5YR or 7.5YR Value: 5 or 6, 4 or moist

Chroma: 3 or 4

Bw and Bk horizon: Hue: 2.5YR or 5YR

Value: 4 to 7, 3 to 6 moist

Chroma: 4 to 6

Texture: Loam or sandy clay loam

Slaughter Series

Map unit(s): SaA

Depth class: Very shallow to shallow

Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Low hills, plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 2 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Clayey, mixed, superactive, thermic, shallow Petrocalcic Paleustolls

Typical Pedon

Map unit in which located: SaA, Slaughter loam, 0 to 2 percent slopes Location in survey area: Curry County, New Mexico; 50 feet east and 1,000 feet south of the northwest corner of section 6, T. 3 N., R. 31 E.; Latitude: 34 degrees 27 minutes 38 seconds N.; Longitude: 103 degrees 40 minutes 07 seconds W.

- A—0 to 6 inches; brown (7.5YR 4/3) loam, dark brown (7.5YR 3/3) moist; weak fine subangular blocky structure; hard, friable, nonsticky and nonplastic; many fine roots few fine pores; neutral, abrupt smooth boundary.
- Bt1—6 to 12 inches; brown (7.5YR 4/3) clay loam, dark brown (7.5YR 3/3) moist; moderate medium subangular blocky structure; very hard, friable, slightly sticky and slightly plastic; many fine roots; few fine and medium pores; many distinct clay films on ped faces; neutral, clear smooth boundary.
- Bt2—12 to 18 inches; reddish brown (5YR 4/3) clay loam, dark reddish brown (5YR 3/3) moist; moderate medium subangular blocky structure; very hard, friable, slightly sticky and slightly plastic; few fine roots; few fine and medium pores; many distinct clay films on ped faces; neutral, abrupt wavy boundary.

Bkm—18 to 30 inches; indurated caliche.

BCk—30 to 80 inches; light brown (7.5YR 6/3) sandy clay loam, brown (7.5YR 5/3) moist; weak fine subangular blocky structure; hard, friable, slightly sticky and nonplastic; few fine roots, few fine pores; many masses of calcium carbonate, few hard calcium carbonate concretions; violently effervescent; moderately alkaline.

Range in Characteristics

Depth to petrocalcic horizon: 12 to 20 inches

A horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 or 3

Bt horizon:

Hue: 5YR or 7.5YR Value: 4 or 5, 3 or 4 moist

Chroma: 2 to 4

Texture: Clay loam or clay

Bkm horizon: Consists of indurated caliche from several inches to several feet thick.

BCk horizon: Extremely variable in texture and color.

Spantara Series

Map unit(s): SnC
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 2.0 to 6.0 in/hr (moderately rapid)

Landform: Plains, playa slopes

Parent material: Coarse-loamy eolian deposits Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 1 to 5 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Coarse-loamy, mixed, superactive, thermic Aridic Haplustalfs

Typical Pedon

Map unit in which located: SnC, Spantara fine sand, 1 to 5 percent slopes Location in survey area: Curry County, New Mexico; 1,000 feet south and 50 feet east of the northwest corner of section 17, T. 2 N., R. 32 E.; Latitude: 34 degrees 24 minutes 10 seconds N.; Longitude: 103 degrees 36 minutes 58 seconds W.

- A1—0 to 3 inches; dark yellowish brown (10YR 4/4) fine sand, dark brown (10YR 3/3) moist; weak fine granular structure; soft, very friable, nonsticky and nonplastic; common fine roots; few fine and medium pores; neutral; abrupt smooth boundary.
- A2—3 to 10 inches; brown (10YR 5/3) fine sand, dark yellowish brown (10YR 4/4) moist; weak medium and coarse subangular blocky structure; soft, very friable, nonsticky and nonplastic; common fine roots; few fine and medium pores; neutral; abrupt smooth boundary.
- Bt1—10 to 17 inches; brown (7.5YR 5/4) fine sand, strong brown (7.5YR 5/6) moist; weak medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; few fine roots; few fine and medium pores; few faint clay films on ped surface; neutral; clear smooth boundary.
- Bt2—17 to 24 inches; reddish brown (5YR 5/3) loamy fine sand, reddish brown (5YR 4/4) moist; moderate medium subangular structure; slightly hard, very friable, nonsticky and nonplastic; few fine roots; few fine and medium pores; many prominent clay films; slightly alkaline; clear smooth boundary.
- Bt3—24 to 34 inches; reddish brown (5YR 4/4) fine sandy loam, yellowish red (5YR 4/6) moist; moderate medium subangular blocky structure; slightly hard, very friable, nonsticky and nonplastic; few fine roots; common fine and medium pores; many prominent clay films; slightly alkaline; clear smooth boundary.
- Bt4—34 to 45 inches; reddish brown (5YR 5/4) fine sandy loam, yellowish red (5YR 5/6) moist; moderate medium subangular blocky structure; hard, friable, nonsticky and nonplastic; few fine roots; common fine and medium pores; many distinct clay films; slightly alkaline; clear smooth boundary.
- Bt5—45 to 80 inches; reddish brown (5YR 5/4) loamy fine sand, yellowish red (5YR 5/6) moist; weak medium subangular blocky structure; hard, friable, nonsticky and nonplastic; few fine and medium pores; common distinct clay films; few fine irregular-shaped masses of calcium carbonate; slightly effervescent; moderately alkaline.

Range in Characteristics

A horizon:

Hue: 5YR to 10YR Value: 4 or 5, 3 or 4 moist

Chroma: 3 to 6

Texture: Fine sand or loamy fine sand

Bt horizon:

Hue: 5YR or 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 3 to 6

Texture: Loamy fine sand, fine sandy loam, or sandy clay loam

Sparenberg Series

Map unit(s): SpA
Depth class: Very deep

Drainage class: Somewhat poorly drained

Slowest permeability: 0.00 to 0.06 in/hr (very slow)

Landform: Playa floors

Parent material: Clayey lacustrine deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 1 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)
Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Udic Haplusterts

Typical Pedon

Map unit in which located: SpA, Sparenberg clay, 0 to 1 percent slopes, occasionally ponded

Location in survey area: Curry County, New Mexico; 175 feet west and 400 feet south of the northeast corner of section 14, T. 5 N., R. 32 E.; Latitude: 34 degrees 39 minutes 41 seconds N.; Longitude: 103 degrees 31 minutes 17 seconds W.

- A—0 to 4 inches; dark grayish brown (10YR 4/2) clay, very dark grayish brown (10YR 3/2) moist; weak medium platy structure; hard, firm, sticky and plastic; few large and many fine roots; common fine pores; slightly alkaline; abrupt smooth boundary.
- Bw—4 to 12 inches; dark gray (10YR 4/1) clay, very dark gray (10YR 3/1) moist; weak medium prismatic structure parting to strong angular blocky; very hard, firm, sticky and plastic; few large and common fine roots; common very fine pores; common fine masses of calcium carbonate; slightly effervescent; moderately alkaline; gradual wavy boundary.
- Bss1—12 to 31 inches; gray (10YR 5/1) clay, dark gray (10YR 4/1) moist; weak coarse prismatic structure parting to strong medium angular blocky; very hard, firm, sticky and plastic; few fine roots; common very fine pores; many pressure faces; few prominent slickensides; few fine masses of carbon; slightly effervescent; moderately alkaline; gradual, wavy boundary.
- Bss2—31 to 46 inches; dark grayish brown (10YR 4/2) clay, very dark grayish brown (10YR 3/2) moist; strong medium angular blocky structure; very hard, firm, sticky and plastic; few fine roots; few very fine roots; many pressure faces and prominent slickensides; slightly effervescent; slightly alkaline; clear wavy boundary.
- Bkss—46 to 80 inches; grayish brown (10YR 5/2) clay, dark grayish brown (10YR 4/2) moist; weak coarse angular blocky structure; very hard, firm, sticky and plastic; many pressure faces and distinct slickensides; common soft masses of calcium carbonate; strongly effervescent; moderately alkaline.

Range in Characteristics

A horizon: Hue: 10YR

Value: 3 or 4, 2 or 3 moist

Chroma: 1 to 3

Bw horizon:

Hue: 10YR or 2.5YR

Value: 2 to 4 moist, 3 to 5 dry; where moist color values are 4, they comprise less

than 50 percent of the matrix

Chroma: 1 or 2 Bss horizon: Hue: 10YR

Value: 3 to 5, 2 to 4 moist

Chroma: 1 or 2

Redoximorphic features: None or few

Bkss horizon: Hue: 10YR

Value: 4 to 6, 3 to 5 moist

Chroma: 1 or 2

Redoximorphic features: None or few

Sparks Series

Map unit(s): SsA
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.06 to 0.2 in/hr (slow)

Landform: Plains

Parent material: Loamy eolian deposits

Elevation: 4,100 to 5,300 feet (1,250 to 1,615 meters)

Slope: 0 to 2 percent

Mean annual precipitation: 16 to 18 inches (406 to 457 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, mixed, superactive, thermic Aridic Paleustalfs

Typical Pedon

Map unit in which located: SsA, Sparks loam, 0 to 2 percent slopes Location in survey area: Quay County, New Mexico; 2,200 feet south and 2,200 feet west of the northeast corner of section 19, T. 7 N., R. 27 E.; Latitude: 34 degrees 49 minutes 00 seconds N.; Longitude: 104 degrees 07 minutes 10 seconds.

- Ap—0 to 6 inches; brown (7.5YR 5/4) loam, dark brown (7.5YR 3/3) moist; weak fine platy structure; friable, very friable, slightly sticky and slightly plastic; few fine roots, few fine pores; neutral; abrupt smooth boundary.
- Bt1—6 to 18 inches; reddish brown (5YR 5/4) clay, reddish brown (5YR 4/4) moist; moderate coarse prismatic structure parting to moderate medium subangular blocky; hard, firm, sticky and slightly plastic; common fine roots and pores; moderately thick clay films on ped faces and in pores; neutral; clear wavy boundary.
- Bt2—18 to 42 inches; light reddish brown (5YR 6/4) clay loam, reddish brown (5YR 4/4) moist; weak coarse prismatic structure parting to weak medium subangular block; hard, firm, sticky and slightly plastic; few fine roots and pores; moderately thick clay films on ped faces and in pores, neutral; clear wavy boundary.
- Btk—42 to 80 inches; pink (5YR 7/4) clay loam, light reddish brown (5YR 6/4) moist; weak medium subangular blocky structure; hard, firm, slightly sticky and slightly plastic; few fine roots and few fine pores; thin clay films on ped

faces and in pores; common films of calcium carbonate on ped faces, violently effervescent; moderately alkaline.

Range in Characteristics

Depth to carbonates: 33 to 60 inches

A horizon: Hue: 7.5YR

Value: 3 to 5, 2 or 3 moist

Chroma: 3 or 4

Bt horizon:

Hue: 5YR or 7.5YR Value: 4 to 6, 3 or 4 moist

Chroma: 4 or 5

Texture: Clay loam or clay

Btk horizon:

Hue: 5YR or 7.5YR Value: 5 to 7, 4 to 6 moist

Chroma: 3 to 6

Tucumcari Series

Map unit(s): 11, 13
Depth class: Very deep
Drainage class: Well drained

Slowest permeability: 0.2 to 0.6 in/hr (moderately slow)

Landform: Pediments, swales

Parent material: Red bed alluvium derived from sandstone and shale

Elevation: 4,400 to 5,300 feet (1,341 to 1,615 meters)

Slope: 0 to 3 percent

Mean annual precipitation: 14 to 16 inches (356 to 406 millimeters)

Mean annual air temperature: 57 to 63 degrees F (14.0 to 17.0 degrees C)

Freeze-free period: 180 to 200 days

Taxonomic class: Fine, smectitic, thermic Ustertic Haplargids

Typical Pedon

Map unit in which located: 11, Tucumcari-Hassell clay loams, 0 to 5 percent slopes Location in survey area: Quay County, New Mexico; 250 feet south and 1,000 feet east of the northwest corner of section 32, T. 6 N., R. 27 E.; Latitude: 34 degrees 42 minutes 22 seconds N.; Longitude: 104 degrees 06 minutes 20 seconds W.

- A—0 to 3 inches; reddish brown (5YR 5/3) clay loam, reddish brown (5YR 4/3) moist; weak very fine and fine subangular blocky structure; slightly hard, friable, slightly sticky and slightly plastic; many very fine and fine roots; few very fine and fine pores; moderately alkaline; clear smooth boundary.
- Btk—3 to 25 inches; reddish brown (5YR 4/3) clay loam, reddish brown (5YR 4/3) moist; moderate fine and medium subangular blocky structure; hard, firm, sticky and plastic; common very fine and fine roots; few very fine and fine pores; common distinct clay films on ped faces and lining pores; few fine threads and disseminated calcium carbonate; strongly effervescent; moderately alkaline; clear smooth boundary.
- Bk—25 to 80 inches; reddish brown (5YR 5/4) clay loam, reddish brown (5YR 4/4) moist; weak fine and medium subangular blocky structure; few very fine

and fine roots; few very fine pores; few fine soft masses of calcium carbonate; violently effervescent; moderately alkaline.

Range in Characteristics

A horizon:

Hue: 5YR or 7.5YR Value: 3 to 5, 2 to 4 moist

Chroma: 3 or 4

Btk and Bk horizon: Hue: 5YR or 7.5YR Value: 4 to 6, 3 to 5 moist

Chroma: 3 to 6

References

- (1) American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- (2) American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- (3) Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- (4) Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- (5) Federal Register. February 24, 1995. Hydric soils of the United States.
- (6) Hurt, G.W., P.M. Whited, and R.F. Pringle, editors. Version 5.0, 2002. Field indicators of hydric soils in the United States.
- (7) National Research Council. 1995. Wetlands: Characteristics and boundaries.
- (8) Schoeneberger, P.J., D.A. Wysocki, E.C. Benham, and W.D. Broderson, editors. 2002. Field book for describing and sampling soils. Version 2.0. U.S. Department of Agriculture, Natural Resources Conservation Service.
- (9) Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/technical/
- (10) Soil Survey Staff. 1998. Keys to soil taxonomy. 8th edition. U.S. Department of Agriculture, Natural Resources Conservation Service.
- (11) Soil Survey Staff. 2003. Keys to soil taxonomy. 9th edition. U.S. Department of Agriculture, Natural Resources Conservation Service.
- (12) Soil Survey Staff. 2006. Keys to soil taxonomy. 10th edition. U.S. Department of Agriculture. Natural Resources Conservation Service.
- (13) Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service. U.S. Department of Agriculture Handbook 436.
- (14) Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- (15) United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- (16) United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. http://www.nrcs.usda.gov/technical/

- (17) United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://soils.usda.gov/technical/
- (18) United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210.

Glossary

Many of the terms relating to landforms, geology, and geomorphology are defined in more detail in the "National Soil Survey Handbook" (available in local offices of the Natural Resources Conservation Service or on the Internet).

Aggregate, soil. Many fine particles held in a single mass or cluster. Natural soil aggregates, such as granules, blocks, or prisms, are called peds. Clods are aggregates produced by tillage or logging.

Alluvial fan. A low, outspread mass of loose materials and/or rock material, commonly with gentle slopes. It is shaped like an open fan or a segment of a cone. The material was deposited by a stream at the place where it issues from a narrow mountain valley or upland valley or where a tributary stream is near or at its junction with the main stream. The fan is steepest near its apex, which points upstream, and slopes gently and convexly outward (downstream) with a gradual decrease in gradient.

Alluvium. Unconsolidated material, such as gravel, sand, silt, clay, and various mixtures of these, deposited on land by running water.

Animal unit month (AUM). The amount of forage required by one mature cow of approximately 1,000 pounds weight, with or without a calf, for 1 month.

Aquic conditions. Current soil wetness characterized by saturation, reduction, and redoximorphic features.

Argillic horizon. A subsoil horizon characterized by an accumulation of illuvial clay.
Association, soil. A group of soils or miscellaneous areas geographically associated in a characteristic repeating pattern and defined and delineated as a single map unit.

Available water capacity (available moisture capacity). The capacity of soils to hold water available for use by most plants. It is commonly defined as the difference between the amount of soil water at field moisture capacity and the amount at wilting point. It is commonly expressed as inches of water per inch of soil. The capacity, in inches, in a 60-inch profile or to a limiting layer is expressed as:

Very low	0 to 3
Low	
Moderate	6 to 9
High	9 to 12
Very high	more than 12

Backslope. The position that forms the steepest and generally linear, middle portion of a hillslope. In profile, backslopes are commonly bounded by a convex shoulder above and a concave footslope below.

Base saturation. The degree to which material having cation-exchange properties is saturated with exchangeable bases (sum of Ca, Mg, Na, and K), expressed as a percentage of the total cation-exchange capacity.

Bedrock. The solid rock that underlies the soil and other unconsolidated material or that is exposed at the surface.

Bedrock-controlled topography. A landscape where the configuration and relief of the landforms are determined or strongly influenced by the underlying bedrock.

Breaks. A landscape or tract of steep, rough or broken land dissected by ravines and gullies and marking a sudden change in topography.

- **Brush management.** Use of mechanical, chemical, or biological methods to make conditions favorable for reseeding or to reduce or eliminate competition from woody vegetation and thus allow understory grasses and forbs to recover. Brush management increases forage production and thus reduces the hazard of erosion. It can improve the habitat for some species of wildlife.
- **Calcareous soil.** A soil containing enough calcium carbonate (commonly combined with magnesium carbonate) to effervesce visibly when treated with cold, dilute hydrochloric acid.
- Caliche. A general term for a prominent zone of secondary carbonate accumulation in surficial materials in warm, subhumid to arid areas. Caliche is formed by both geologic and pedologic processes. Finely crystalline calcium carbonate forms a nearly continuous surface-coating and void-filling medium in geologic (parent) materials. Cementation ranges from weak in nonindurated forms to very strong in indurated forms. Other minerals (e.g., carbonates, silicate, and sulfate) may occur as accessory cements. Most petrocalcic horizons and some calcic horizons are caliche.
- **Capillary water.** Water held as a film around soil particles and in tiny spaces between particles. Surface tension is the adhesive force that holds capillary water in the soil.
- **Cation.** An ion carrying a positive charge of electricity. The common soil cations are calcium, potassium, magnesium, sodium, and hydrogen.
- **Cation-exchange capacity.** The total amount of exchangeable cations that can be held by the soil, expressed in terms of milliequivalents per 100 grams of soil at neutrality (pH 7.0) or at some other stated pH value. The term, as applied to soils, is synonymous with base-exchange capacity but is more precise in meaning.
- **Chemical treatment.** Control of unwanted vegetation through the use of chemicals. **Chiseling.** Tillage with an implement having one or more soil-penetrating points that shatter or loosen hard, compacted layers to a depth below normal plow depth.
- **Clay.** As a soil separate, the mineral soil particles less than 0.002 millimeter in diameter. As a soil textural class, soil material that is 40 percent or more clay, less than 45 percent sand, and less than 40 percent silt.
- Clay depletions. See Redoximorphic features.
- **Clay film.** A thin coating of oriented clay on the surface of a soil aggregate or lining pores or root channels. Synonyms: clay coating, clay skin.
- **Claypan.** A dense, compact, slowly permeable subsoil layer that contains much more clay than the overlying materials, from which it is separated by a sharply defined boundary. A claypan is commonly hard when dry and plastic and sticky when wet.
- **Climax plant community.** The stabilized plant community on a particular site. The plant cover reproduces itself and does not change so long as the environment remains the same.
- Coarse textured soil. Sand or loamy sand.
- **Cobble (or cobblestone).** A rounded or partly rounded fragment of rock 3 to 10 inches (7.6 to 25 centimeters) in diameter.
- **Cobbly soil material.** Material that has 15 to 35 percent, by volume, rounded or partially rounded rock fragments 3 to 10 inches (7.6 to 25 centimeters) in diameter. Very cobbly soil material has 35 to 60 percent of these rock fragments, and extremely cobbly soil material has more than 60 percent.
- **COLE** (coefficient of linear extensibility). See Linear extensibility.
- **Colluvium.** Unconsolidated, unsorted earth material being transported or deposited on side slopes and/or at the base of slopes by mass movement (e.g., direct gravitational action) and by local, unconcentrated runoff.
- **Complex, soil.** A map unit of two or more kinds of soil or miscellaneous areas in such an intricate pattern or so small in area that it is not practical to map them

- separately at the selected scale of mapping. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas.
- **Concretions.** Cemented bodies with crude internal symmetry organized around a point, a line, or a plane. They typically take the form of concentric layers visible to the naked eye. Calcium carbonate, iron oxide, and manganese oxide are compounds making up concretions. See Redoximorphic features.
- Conservation cropping system. Growing crops in combination with needed cultural and management practices. In a good conservation cropping system, the soil-improving crops and practices more than offset the effects of the soil-depleting crops and practices. Cropping systems are needed on all tilled soils. Soil-improving practices in a conservation cropping system include the use of rotations that contain grasses and legumes and the return of crop residue to the soil. Other practices include the use of green manure crops of grasses and legumes, proper tillage, adequate fertilization, and weed and pest control.
- **Conservation tillage.** A tillage system that does not invert the soil and that leaves a protective amount of crop residue on the surface throughout the year.
- **Consistence, soil.** Refers to the degree of cohesion and adhesion of soil material and its resistance to deformation when ruptured. Consistence includes resistance of soil material to rupture and to penetration; plasticity, toughness, and stickiness of puddled soil material; and the manner in which the soil material behaves when subject to compression. Terms describing consistence are defined in the "Soil Survey Manual."
- **Contour stripcropping.** Growing crops in strips that follow the contour. Strips of grass or close-growing crops are alternated with strips of clean-tilled crops or summer fallow.
- **Control section.** The part of the soil on which classification is based. The thickness varies among different kinds of soil, but for many it is that part of the soil profile between depths of 10 inches and 40 or 80 inches.
- **Corrosion (geomorphology).** A process of erosion whereby rocks and soil are removed or worn away by natural chemical processes, especially by the solvent action of running water, but also by other reactions, such as hydrolysis, hydration, carbonation, and oxidation.
- **Corrosion (soil survey interpretations).** Soil-induced electrochemical or chemical action that dissolves or weakens concrete or uncoated steel.
- **Cover crop.** A close-growing crop grown primarily to improve and protect the soil between periods of regular crop production, or a crop grown between trees and vines in orchards and vineyards.
- **Crop residue management.** Returning crop residue to the soil, which helps to maintain soil structure, organic matter content, and fertility and helps to control erosion.
- **Cropping system.** Growing crops according to a planned system of rotation and management practices.
- **Cross-slope farming.** Deliberately conducting farming operations on sloping farmland in such a way that tillage is across the general slope.
- **Cutbanks cave** (in tables). The walls of excavations tend to cave in or slough. **Decreasers.** The most heavily grazed climax range plants. Because they are the most palatable, they are the first to be destroyed by overgrazing.
- Deferred grazing. Postponing grazing or resting grazing land for a prescribed period.
 Depth, soil. Generally, the thickness of the soil over bedrock. Very deep soils are more than 60 inches deep over bedrock; deep soils, 40 to 60 inches; moderately deep, 20 to 40 inches; shallow, 10 to 20 inches; and very shallow, less than 10 inches.
- **Diversion (or diversion terrace).** A ridge of earth, generally a terrace, built to protect downslope areas by diverting runoff from its natural course.

- **Divided-slope farming.** A form of field stripcropping in which crops are grown in a systematic arrangement of two strips, or bands, across the slope to reduce the hazard of water erosion. One strip is in a close-growing crop that provides protection from erosion, and the other strip is in a crop that provides less protection from erosion. This practice is used where slopes are not long enough to permit a full stripcropping pattern to be used.
- Drainage class (natural). Refers to the frequency and duration of wet periods under conditions similar to those under which the soil formed. Alterations of the water regime by human activities, either through drainage or irrigation, are not a consideration unless they have significantly changed the morphology of the soil. Seven classes of natural soil drainage are recognized—excessively drained, somewhat excessively drained, well drained, moderately well drained, somewhat poorly drained, poorly drained, and very poorly drained. These classes are defined in the "Soil Survey Manual."
- **Drainage, surface.** Runoff, or surface flow of water, from an area.
- **Drainageway.** A general term for a course or channel along which water moves in draining an area. A term restricted to relatively small, linear depressions that at some time move concentrated water and either do not have a defined channel or have only a small defined channel.
- **Draw.** A small stream valley that generally is shallower and more open than a ravine or gulch and that has a broader bottom. The present stream channel may appear inadequate to have cut the drainageway that it occupies.
- **Dune.** A low mound, ridge, bank, or hill of loose, windblown granular material (generally sand), either barren and capable of movement from place to place or covered and stabilized with vegetation but retaining its characteristic shape.
- Earthy fill. See Mine spoil.
- **Ecological site.** An area where climate, soil, and relief are sufficiently uniform to produce a distinct natural plant community. An ecological site is the product of all the environmental factors responsible for its development. It is typified by an association of species that differ from those on other ecological sites in kind and/or proportion of species or in total production.
- **Eluviation.** The movement of material in true solution or colloidal suspension from one place to another within the soil. Soil horizons that have lost material through eluviation are eluvial; those that have received material are illuvial.
- **Endosaturation.** A type of saturation of the soil in which all horizons between the upper boundary of saturation and a depth of 2 meters are saturated.
- **Eolian deposit.** Sand-, silt-, or clay-sized clastic material transported and deposited primarily by wind, commonly in the form of a dune or a sheet of sand or loess.
- **Ephemeral stream.** A stream, or reach of a stream, that flows only in direct response to precipitation. It receives no long-continued supply from melting snow or other source, and its channel is above the water table at all times.
- **Episaturation.** A type of saturation indicating a perched water table in a soil in which saturated layers are underlain by one or more unsaturated layers within 2 meters of the surface.
- **Erosion.** The wearing away of the land surface by water, wind, ice, or other geologic agents and by such processes as gravitational creep.
 - *Erosion* (accelerated). Erosion much more rapid than geologic erosion, mainly as a result of human or animal activities or of a catastrophe in nature, such as a fire, that exposes the surface.
 - *Erosion* (geologic). Erosion caused by geologic processes acting over long geologic periods and resulting in the wearing away of mountains and the building up of such landscape features as flood plains and coastal plains. Synonym: natural erosion.

- **Escarpment.** A relatively continuous and steep slope or cliff breaking the general continuity of more gently sloping land surfaces and resulting from erosion or faulting. Most commonly applied to cliffs produced by differential erosion. Synonym: scarp.
- **Fallow.** Cropland left idle in order to restore productivity through accumulation of moisture. Summer fallow is common in regions of limited rainfall where cereal grain is grown. The soil is tilled for at least one growing season for weed control and decomposition of plant residue.
- **Fertility, soil.** The quality that enables a soil to provide plant nutrients, in adequate amounts and in proper balance, for the growth of specified plants when light, moisture, temperature, tilth, and other growth factors are favorable.
- **Field moisture capacity.** The moisture content of a soil, expressed as a percentage of the ovendry weight, after the gravitational, or free, water has drained away; the field moisture content 2 or 3 days after a soaking rain; also called *normal field capacity*, *normal moisture capacity*, or *capillary capacity*.
- Fine textured soil. Sandy clay, silty clay, or clay.
- **Flood plain.** The nearly level plain that borders a stream and is subject to flooding unless protected artificially.
- **Forb.** Any herbaceous plant not a grass or a sedge.
- **Genesis, soil.** The mode of origin of the soil. Refers especially to the processes or soil-forming factors responsible for the formation of the solum, or true soil, from the unconsolidated parent material.
- **Gilgai.** Commonly, a succession of microlows (microbasins) and microhighs (microknolls) in nearly level areas or of microvalleys and microridges parallel with the slope. Typically, the microrelief of clayey soils that shrink and swell considerably with changes in moisture content.
- **Grassed waterway.** A natural or constructed waterway, typically broad and shallow, seeded to grass as protection against erosion. Conducts surface water away from cropland.
- **Gravel.** Rounded or angular fragments of rock as much as 3 inches (2 millimeters to 7.6 centimeters) in diameter. An individual piece is a pebble.
- **Gravelly soil material.** Material that has 15 to 35 percent, by volume, rounded or angular rock fragments, not prominently flattened, as much as 3 inches (7.6 centimeters) in diameter.
- **Ground water.** Water filling all the unblocked pores of the material below the water table.
- **Gully.** A small channel with steep sides caused by erosion and cut in unconsolidated materials by concentrated but intermittent flow of water. The distinction between a gully and a rill is one of depth. A gully generally is an obstacle to farm machinery and is too deep to be obliterated by ordinary tillage; a rill is of lesser depth and can be smoothed over by ordinary tillage.
- **Hard bedrock**. Bedrock that cannot be excavated except by blasting or by the use of special equipment that is not commonly used in construction.
- Hard to reclaim (in tables). Reclamation is difficult after the removal of soil for construction and other uses. Revegetation and erosion control are extremely difficult.
- **Hill.** A generic term for an elevated area of the land surface, rising as much as 1,000 feet above surrounding lowlands, commonly of limited summit area and having a well defined outline. Slopes are generally more than 15 percent. The distinction between a hill and a mountain is arbitrary and may depend on local usage.
- **Hillslope.** A generic term for the steeper part of a hill between its summit and the drainage line, valley flat, or depression floor at the base of a hill.

- **Horizon, soil.** A layer of soil, approximately parallel to the surface, having distinct characteristics produced by soil-forming processes. In the identification of soil horizons, an uppercase letter represents the major horizons. Numbers or lowercase letters that follow represent subdivisions of the major horizons. An explanation of the subdivisions is given in the "Soil Survey Manual." The major horizons of mineral soil are as follows:
 - A horizon.—The mineral horizon at or near the surface in which an accumulation of humified organic matter is mixed with the mineral material. Also, a plowed surface horizon, most of which was originally part of a B horizon.
 - B horizon.—The mineral horizon below an A horizon. The B horizon is in part a layer of transition from the overlying A to the underlying C horizon. The B horizon also has distinctive characteristics, such as (1) accumulation of clay, sesquioxides, humus, or a combination of these; (2) prismatic or blocky structure; (3) redder or browner colors than those in the A horizon; or (4) a combination of these.
 - C horizon.—The mineral horizon or layer, excluding indurated bedrock, that is little affected by soil-forming processes and does not have the properties typical of the overlying soil material. The material of a C horizon may be either like or unlike that in which the solum formed. If the material is known to differ from that in the solum, an Arabic numeral, commonly a 2, precedes the letter C.
 - Cr horizon.—Soft, consolidated bedrock beneath the soil.
 - R layer.—Consolidated bedrock beneath the soil. The bedrock commonly underlies a C horizon, but it can be directly below an A or a B horizon.
- Hydrologic soil groups. Refers to soils grouped according to their runoff potential. The soil properties that influence this potential are those that affect the minimum rate of water infiltration on a bare soil during periods after prolonged wetting when the soil is not frozen. These properties are depth to a seasonal high water table, the infiltration rate and permeability after prolonged wetting, and depth to a very slowly permeable layer. The slope and the kind of plant cover are not considered but are separate factors in predicting runoff.
- **Illuviation.** The movement of soil material from one horizon to another in the soil profile. Generally, material is removed from an upper horizon and deposited in a lower horizon.
- **Impervious soil.** A soil through which water, air, or roots penetrate slowly or not at all. No soil is absolutely impervious to air and water all the time.
- **Increasers.** Species in the climax vegetation that increase in amount as the more desirable plants are reduced by close grazing. Increasers commonly are the shorter plants and the less palatable to livestock.
- **Infiltration.** The downward entry of water into the immediate surface of soil or other material, as contrasted with percolation, which is movement of water through soil layers or material.
- **Infiltration capacity.** The maximum rate at which water can infiltrate into a soil under a given set of conditions.
- **Infiltration rate.** The rate at which water penetrates the surface of the soil at any given instant, usually expressed in inches per hour. The rate can be limited by the infiltration capacity of the soil or the rate at which water is applied at the surface.
- Intake rate. The average rate of water entering the soil under irrigation. Most soils have a fast initial rate; the rate decreases with application time. Therefore, intake rate for design purposes is not a constant but is a variable depending on the net irrigation application. The rate of water intake, in inches per hour, is expressed as follows:

ess than 0.2very	low
.2 to 0.4	
.4 to 0.75 moderately	low
.75 to 1.25mode	rate
.25 to 1.75 moderately h	nigh
.75 to 2.5	nigh
Nore than 2.5 very h	niah

Intermittent stream. A stream, or reach of a stream, that does not flow year-round but that is commonly dry for 3 or more months out of 12 and whose channel is generally below the local water table. It flows only during wet periods or when it receives ground-water discharge or long, continued contributions from melting snow or other surface and shallow subsurface sources.

Invaders. On range, plants that encroach into an area and grow after the climax vegetation has been reduced by grazing. Generally, plants invade following disturbance of the surface.

Iron depletions. See Redoximorphic features.

Irrigation. Application of water to soils to assist in production of crops. Methods of irrigation are:

Basin.—Water is applied rapidly to nearly level plains surrounded by levees or dikes.

Border.—Water is applied at the upper end of a strip in which the lateral flow of water is controlled by small earth ridges called border dikes, or borders.

Controlled flooding.—Water is released at intervals from closely spaced field ditches and distributed uniformly over the field.

Corrugation.—Water is applied to small, closely spaced furrows or ditches in fields of close-growing crops or in orchards so that it flows in only one direction.

Drip (or trickle).—Water is applied slowly and under low pressure to the surface of the soil or into the soil through such applicators as emitters, porous tubing, or perforated pipe.

Furrow.—Water is applied in small ditches made by cultivation implements. Furrows are used for tree and row crops.

Sprinkler.—Water is sprayed over the soil surface through pipes or nozzles from a pressure system.

Subirrigation.—Water is applied in open ditches or tile lines until the water table is raised enough to wet the soil.

Wild flooding.—Water, released at high points, is allowed to flow onto an area without controlled distribution.

Knoll. A small, low, rounded hill rising above adjacent landforms.

K-sat. Saturated hydraulic conductivity. (See Permeability.)

Lacustrine deposit. Material deposited in lake water and exposed when the water level is lowered or the elevation of the land is raised.

Lake plain. A nearly level surface marking the floor of an extinct lake filled by well sorted, generally fine textured, stratified deposits, commonly containing varyes.

Lake terrace. A narrow shelf, partly cut and partly built, produced along a lakeshore in front of a scarp line of low cliffs and later exposed when the water level falls.

Large stones (in tables). Rock fragments 3 inches (7.6 centimeters) or more across. Large stones adversely affect the specified use of the soil.

Leaching. The removal of soluble material from soil or other material by percolating water.

Linear extensibility. Refers to the change in length of an unconfined clod as moisture content is decreased from a moist to a dry state. Linear extensibility is used to determine the shrink-swell potential of soils. It is an expression of the volume change between the water content of the clod at 1/3- or 1/10-bar tension (33kPa or 10kPa tension) and oven dryness. Volume change is influenced by the

- amount and type of clay minerals in the soil. The volume change is the percent change for the whole soil. If it is expressed as a fraction, the resulting value is COLE, coefficient of linear extensibility.
- **Liquid limit.** The moisture content at which the soil passes from a plastic to a liquid state.
- **Loam.** Soil material that is 7 to 27 percent clay particles, 28 to 50 percent silt particles, and less than 52 percent sand particles.
- **Loess.** Material transported and deposited by wind and consisting dominantly of silt-sized particles.
- Low strength. The soil is not strong enough to support loads.
- **Low-residue crops.** Such crops as corn used for silage, peas, beans, and potatoes. Residue from these crops is not adequate to control erosion until the next crop in the rotation is established. These crops return little organic matter to the soil.
- **Masses.** Concentrations of substances in the soil matrix that do not have a clearly defined boundary with the surrounding soil material and cannot be removed as a discrete unit. Common compounds making up masses are calcium carbonate, gypsum or other soluble salts, iron oxide, and manganese oxide. See Redoximorphic features.
- **Mechanical treatment.** Use of mechanical equipment for seeding, brush management, and other management practices.
- Medium textured soil. Very fine sandy loam, loam, silt loam, or silt.
- **Mineral soil.** Soil that is mainly mineral material and low in organic material. Its bulk density is more than that of organic soil.
- **Minimum tillage.** Only the tillage essential to crop production and prevention of soil damage.
- **Miscellaneous area.** A kind of map unit that has little or no natural soil and supports little or no vegetation.
- **Moderately coarse textured soil.** Coarse sandy loam, sandy loam, or fine sandy loam.
- Moderately fine textured soil. Clay loam, sandy clay loam, or silty clay loam.
 Mollic epipedon. A thick, dark, humus-rich surface horizon (or horizons) that has high base saturation and pedogenic soil structure. It may include the upper part of the subsoil.
- **Morphology, soil.** The physical makeup of the soil, including the texture, structure, porosity, consistence, color, and other physical, mineral, and biological properties of the various horizons, and the thickness and arrangement of those horizons in the soil profile.
- Mottling, soil. Irregular spots of different colors that vary in number and size. Descriptive terms are as follows: abundance—few, common, and many; size—fine, medium, and coarse; and contrast—faint, distinct, and prominent. The size measurements are of the diameter along the greatest dimension. Fine indicates less than 5 millimeters (about 0.2 inch); medium, from 5 to 15 millimeters (about 0.2 to 0.6 inch); and coarse, more than 15 millimeters (about 0.6 inch).
- **Munsell notation.** A designation of color by degrees of three simple variables—hue, value, and chroma. For example, a notation of 10YR 6/4 is a color with hue of 10YR, value of 6, and chroma of 4.
- **Neutral soil.** A soil having a pH value of 6.6 to 7.3. (See Reaction, soil.)
- **Nodules.** Cemented bodies lacking visible internal structure. Calcium carbonate, iron oxide, and manganese oxide are common compounds making up nodules. See Redoximorphic features.
- **Nose slope (geomorphology).** A geomorphic component of hills consisting of the projecting end (laterally convex area) of a hillside. The overland waterflow is predominantly divergent. Nose slopes consist dominantly of colluvium and slopewash sediments (for example, slope alluvium).

Nutrient, plant. Any element taken in by a plant essential to its growth. Plant nutrients are mainly nitrogen, phosphorus, potassium, calcium, magnesium, sulfur, iron, manganese, copper, boron, and zinc obtained from the soil and carbon, hydrogen, and oxygen obtained from the air and water.

Organic matter. Plant and animal residue in the soil in various stages of decomposition. The content of organic matter in the surface layer is described as follows:

Very low	less than 0.5 percent
Low	0.5 to 1.0 percent
Moderately low	1.0 to 2.0 percent
Moderate	
High	4.0 to 8.0 percent
Very high	more than 8.0 percent

Parent material. The unconsolidated organic and mineral material in which soil forms.

Peat. Unconsolidated material, largely undecomposed organic matter, that has accumulated under excess moisture. (See Fibric soil material.)

Ped. An individual natural soil aggregate, such as a granule, a prism, or a block. **Pedisediment.** A layer of sediment, eroded from the shoulder and backslope of an erosional slope, that lies on and is being (or was) transported across a gently sloping erosional surface at the foot of a receding hill or mountain slope.

Pedon. The smallest volume that can be called "a soil." A pedon is three-dimensional and large enough to permit study of all horizons. Its area ranges from about 10 to 100 square feet (1 square meter to 10 square meters), depending on the variability of the soil.

Percolation. The movement of water through the soil.

Permeability. The quality of the soil that enables water or air to move downward through the profile. The rate at which a saturated soil transmits water is accepted as a measure of this quality. In soil physics, the rate is referred to as "saturated hydraulic conductivity," which is defined in the "Soil Survey Manual." In line with conventional usage in the engineering profession and with traditional usage in published soil surveys, this rate of flow continues to be expressed as "permeability." Terms describing permeability, measured in inches per hour, are as follows:

Impermeableless	s than 00.0015 inch
Very slow00	.0015 to 00.06 inch
Slow	00.06 to 0.2 inch
Moderately slow	0.2 to 0.6 inch
Moderate 0.	6 inch to 2.0 inches
Moderately rapid	2.0 to 6.0 inches
Rapid	6.0 to 20 inches
Very rapidn	nore than 20 inches

pH value. A numerical designation of acidity and alkalinity in soil. (See Reaction, soil.)

Phase, soil. A subdivision of a soil series based on features that affect its use and management, such as slope, stoniness, and flooding.

Piping (in tables). Formation of subsurface tunnels or pipelike cavities by water moving through the soil.

Plastic limit. The moisture content at which a soil changes from semisolid to plastic. **Plasticity index.** The numerical difference between the liquid limit and the plastic limit; the range of moisture content within which the soil remains plastic.

Plateau (geomorphology). A comparatively flat area of great extent and elevation; specifically, an extensive land region that is considerably elevated (more than 100 meters) above the adjacent lower lying terrain, is commonly limited on at least

one side by an abrupt descent, and has a flat or nearly level surface. A comparatively large part of a plateau surface is near summit level.

Playa. The generally dry and nearly level lake plain that occupies the lowest parts of closed depressions, such as those on intermontane basin floors. Temporary flooding occurs primarily in response to precipitation and runoff. Playa deposits are fine grained and may or may not have a high water table and saline conditions.

Plowpan. A compacted layer formed in the soil directly below the plowed layer. **Ponding.** Standing water on soils in closed depressions. Unless the soils are artificially drained, the water can be removed only by percolation or evapotranspiration.

Poorly graded. Refers to a coarse grained soil or soil material consisting mainly of particles of nearly the same size. Because there is little difference in size of the particles, density can be increased only slightly by compaction.

Pore linings. See Redoximorphic features.

Potential rooting depth (effective rooting depth). Depth to which roots could penetrate if the content of moisture in the soil were adequate. The soil has no properties restricting the penetration of roots to this depth.

Prescribed burning. Deliberately burning an area for specific management purposes, under the appropriate conditions of weather and soil moisture and at the proper time of day.

Productivity, soil. The capability of a soil for producing a specified plant or sequence of plants under specific management.

Profile, **soil**. A vertical section of the soil extending through all its horizons and into the parent material.

Proper grazing use. Grazing at an intensity that maintains enough cover to protect the soil and maintain or improve the quantity and quality of the desirable vegetation. This practice increases the vigor and reproduction capacity of the key plants and promotes the accumulation of litter and mulch necessary to conserve soil and water.

Rangeland. Land on which the potential natural vegetation is predominantly grasses, grasslike plants, forbs, or shrubs suitable for grazing or browsing. It includes natural grasslands, savannas, many wetlands, some deserts, tundras, and areas that support certain forb and shrub communities.

Reaction, soil. A measure of acidity or alkalinity of a soil, expressed as pH values. A soil that tests to pH 7.0 is described as precisely neutral in reaction because it is neither acid nor alkaline. The degrees of acidity or alkalinity, expressed as pH values, are:

Ultra acid	less than 3.5
Extremely acid	3.5 to 4.4
Very strongly acid	4.5 to 5.0
Strongly acid	5.1 to 5.5
Moderately acid	5.6 to 6.0
Slightly acid	6.1 to 6.5
Neutral	6.6 to 7.3
Slightly alkaline	7.4 to 7.8
Moderately alkaline	7.9 to 8.4
Strongly alkaline	8.5 to 9.0
Very strongly alkaline	9.1 and higher

Red beds. Sedimentary strata that are mainly red and are made up largely of sandstone and shale.

Redoximorphic concentrations. See Redoximorphic features.

Redoximorphic depletions. See Redoximorphic features.

Redoximorphic features. Redoximorphic features are associated with wetness and result from alternating periods of reduction and oxidation of iron and manganese

compounds in the soil. Reduction occurs during saturation with water, and oxidation occurs when the soil is not saturated. Characteristic color patterns are created by these processes. The reduced iron and manganese ions may be removed from a soil if vertical or lateral fluxes of water occur, in which case there is no iron or manganese precipitation in that soil. Wherever the iron and manganese are oxidized and precipitated, they form either soft masses or hard concretions or nodules. Movement of iron and manganese as a result of redoximorphic processes in a soil may result in redoximorphic features that are defined as follows:

- 1. Redoximorphic concentrations.—These are zones of apparent accumulation of iron-manganese oxides, including:
 - a. Nodules and concretions, which are cemented bodies that can be removed from the soil intact. Concretions are distinguished from nodules on the basis of internal organization. A concretion typically has concentric layers that are visible to the naked eye. Nodules do not have visible organized internal structure; and
 - Masses, which are noncemented concentrations of substances within the soil matrix; and
 - c. Pore linings, i.e., zones of accumulation along pores that may be either coatings on pore surfaces or impregnations from the matrix adjacent to the pores.
- 2. Redoximorphic depletions.—These are zones of low chroma (chromas less than those in the matrix) where either iron-manganese oxides alone or both iron-manganese oxides and clay have been stripped out, including:
 - a. Iron depletions, i.e., zones that contain low amounts of iron and manganese oxides but have a clay content similar to that of the adjacent matrix: and
 - b. Clay depletions, i.e., zones that contain low amounts of iron, manganese, and clay (often referred to as silt coatings or skeletans).
- 3. Reduced matrix.—This is a soil matrix that has low chroma *in situ* but undergoes a change in hue or chroma within 30 minutes after the soil material has been exposed to air.

Reduced matrix. See Redoximorphic features.

Regolith. All unconsolidated earth materials above the solid bedrock. It includes material weathered in place from all kinds of bedrock and alluvial, glacial, eolian, lacustrine, and pyroclastic deposits.

Relief. The relative difference in elevation between the upland summits and the lowlands or valleys of a given region.

Residuum (residual soil material). Unconsolidated, weathered or partly weathered mineral material that accumulated as bedrock disintegrated in place.

Rill. A very small, steep-sided channel resulting from erosion and cut in unconsolidated materials by concentrated but intermittent flow of water. A rill generally is not an obstacle to wheeled vehicles and is shallow enough to be smoothed over by ordinary tillage.

Road cut. A sloping surface produced by mechanical means during road construction. It is commonly on the uphill side of the road.

Rock fragments. Rock or mineral fragments having a diameter of 2 millimeters or more; for example, pebbles, cobbles, stones, and boulders.

Root zone. The part of the soil that can be penetrated by plant roots.

Runoff. The precipitation discharged into stream channels from an area. The water that flows off the surface of the land without sinking into the soil is called surface runoff. Water that enters the soil before reaching surface streams is called ground-water runoff or seepage flow from ground water.

- **Sand.** As a soil separate, individual rock or mineral fragments from 0.05 millimeter to 2.0 millimeters in diameter. Most sand grains consist of quartz. As a soil textural class, a soil that is 85 percent or more sand and not more than 10 percent clay.
- **Sandstone.** Sedimentary rock containing dominantly sand-sized particles.
- Saturated hydraulic conductivity (K-sat). See Permeability.
- **Saturation.** Wetness characterized by zero or positive pressure of the soil water. Under conditions of saturation, the water will flow from the soil matrix into an unlined auger hole.
- **Sedimentary rock.** A consolidated deposit of clastic particles, chemical precipitates, or organic remains accumulated at or near the surface of the earth under normal low temperature and pressure conditions. Sedimentary rocks include consolidated equivalents of alluvium, colluvium, drift, and eolian, lacustrine, and marine deposits. Examples are sandstone, siltstone, mudstone, claystone, shale, conglomerate, limestone, dolomite, and coal.
- **Sequum.** A sequence consisting of an illuvial horizon and the overlying eluvial horizon. (See Eluviation.)
- **Series, soil.** A group of soils that have profiles that are almost alike, except for differences in texture of the surface layer. All the soils of a series have horizons that are similar in composition, thickness, and arrangement.
- **Shale.** Sedimentary rock that formed by the hardening of a deposit of clay, silty clay, or silty clay loam and that has a tendency to split into thin layers.
- **Sheet erosion.** The removal of a fairly uniform layer of soil material from the land surface by the action of rainfall and surface runoff.
- **Shoulder.** The convex, erosional surface near the top of a hillslope. A shoulder is a transition from summit to backslope.
- **Shrink-swell** (in tables). The shrinking of soil when dry and the swelling when wet. Shrinking and swelling can damage roads, dams, building foundations, and other structures. It can also damage plant roots.
- **Shrub-coppice dune.** A small, streamlined dune that forms around brush and clump vegetation.
- **Side slope (geomorphology).** A geomorphic component of hills consisting of a laterally planar area of a hillside. The overland waterflow is predominantly parallel. Side slopes are dominantly colluvium and slope-wash sediments.
- **Silt.** As a soil separate, individual mineral particles that range in diameter from the upper limit of clay (0.002 millimeter) to the lower limit of very fine sand (0.05 millimeter). As a soil textural class, soil that is 80 percent or more silt and less than 12 percent clay.
- **Siltstone.** An indurated silt having the texture and composition of shale but lacking its fine lamination or fissility; a massive mudstone in which silt predominates over clay.
- **Similar soils.** Soils that share limits of diagnostic criteria, behave and perform in a similar manner, and have similar conservation needs or management requirements for the major land uses in the survey area.
- **Slickensides (pedogenic).** Grooved, striated, and/or glossy (shiny) slip faces on structural peds, such as wedges; produced by shrink-swell processes, most commonly in soils that have a high content of expansive clays.
- **Slope.** The inclination of the land surface from the horizontal. Percentage of slope is the vertical distance divided by horizontal distance, then multiplied by 100. Thus, a slope of 20 percent is a drop of 20 feet in 100 feet of horizontal distance.
- **Slope alluvium.** Sediment gradually transported down the slopes of mountains or hills primarily by nonchannel alluvial processes (i.e., slope-wash processes) and characterized by particle sorting. Lateral particle sorting is evident on long slopes. In a profile sequence, sediments may be distinguished by differences in size and/or specific gravity of rock fragments and may be separated by stone lines.

- Burnished peds and sorting of rounded or subrounded pebbles or cobbles distinguish these materials from unsorted colluvial deposits.
- **Sodic (alkali) soil.** A soil having so high a degree of alkalinity (pH 8.5 or higher) or so high a percentage of exchangeable sodium (15 percent or more of the total exchangeable bases), or both, that plant growth is restricted.
- **Sodicity.** The degree to which a soil is affected by exchangeable sodium. Sodicity is expressed as a sodium adsorption ratio (SAR) of a saturation extract, or the ratio of Na+ to Ca ++ + Mg++. The degrees of sodicity and their respective ratios are:

Slight	less than 13:1
Moderate	13-30:1
Strong	more than 30:1

- **Sodium adsorption ratio (SAR).** A measure of the amount of sodium (Na) relative to calcium (Ca) and magnesium (Mg) in the water extract from saturated soil paste. It is the ratio of the Na concentration divided by the square root of one-half of the Ca + Mg concentration.
- **Soft bedrock.** Bedrock that can be excavated with trenching machines, backhoes, small rippers, and other equipment commonly used in construction.
- **Soil.** A natural, three-dimensional body at the earth's surface. It is capable of supporting plants and has properties resulting from the integrated effect of climate and living matter acting on earthy parent material, as conditioned by relief and by the passage of time.
- **Soil separates.** Mineral particles less than 2 millimeters in equivalent diameter and ranging between specified size limits. The names and sizes, in millimeters, of separates recognized in the United States are as follows:

Very coarse sand	
Coarse sand	1.0 to 0.5
Medium sand	
Fine sand	0.25 to 0.10
Very fine sand	0.10 to 0.05
Silt	0.05 to 0.002
Clay	less than 0.002

- **Solum.** The upper part of a soil profile, above the C horizon, in which the processes of soil formation are active. The solum in soil consists of the A, E, and B horizons. Generally, the characteristics of the material in these horizons are unlike those of the material below the solum. The living roots and plant and animal activities are largely confined to the solum.
- **Stones.** Rock fragments 10 to 24 inches (25 to 60 centimeters) in diameter if rounded or 15 to 24 inches (38 to 60 centimeters) in length if flat.
- **Stony.** Refers to a soil containing stones in numbers that interfere with or prevent tillage.
- **Stripcropping.** Growing crops in a systematic arrangement of strips or bands that provide vegetative barriers to wind erosion and water erosion.
- Structure, soil. The arrangement of primary soil particles into compound particles or aggregates. The principal forms of soil structure are—platy (laminated), prismatic (vertical axis of aggregates longer than horizontal), columnar (prisms with rounded tops), blocky (angular or subangular), and granular. Structureless soils are either single grained (each grain by itself, as in dune sand) or massive (the particles adhering without any regular cleavage, as in many hardpans).
- **Stubble mulch.** Stubble or other crop residue left on the soil or partly worked into the soil. It protects the soil from wind erosion and water erosion after harvest, during preparation of a seedbed for the next crop, and during the early growing period of the new crop.
- **Subsoil.** Technically, the B horizon; roughly, the part of the solum below plow depth.

- **Subsoiling.** Tilling a soil below normal plow depth, ordinarily to shatter a hardpan or claypan.
- **Subsurface layer.** Any surface soil horizon (A, E, AB, or EB) below the surface layer.
- **Summer fallow.** The tillage of uncropped land during the summer to control weeds and allow storage of moisture in the soil for the growth of a later crop. A practice common in semiarid regions, where annual precipitation is not enough to produce a crop every year. Summer fallow is frequently practiced before planting winter grain.
- **Summit.** The topographically highest position of a hillslope. It has a nearly level (planar or only slightly convex) surface.
- **Surface layer.** The soil ordinarily moved in tillage, or its equivalent in uncultivated soil, ranging in depth from 4 to 10 inches (10 to 25 centimeters). Frequently designated as the "plow layer," or the "Ap horizon."
- **Surface soil.** The A, E, AB, and EB horizons, considered collectively. It includes all subdivisions of these horizons.
- **Terrace (conservation).** An embankment, or ridge, constructed across sloping soils on the contour or at a slight angle to the contour. The terrace intercepts surface runoff so that water soaks into the soil or flows slowly to a prepared outlet. A terrace in a field generally is built so that the field can be farmed. A terrace intended mainly for drainage has a deep channel that is maintained in permanent sod.
- **Terrace (geomorphology).** A steplike surface, bordering a valley floor or shoreline, that represents the former position of a flood plain, lake, or seashore. The term is usually applied both to the relatively flat summit surface (tread) that was cut or built by stream or wave action and to the steeper descending slope (scarp or riser) that has graded to a lower base level of erosion.
- **Texture, soil.** The relative proportions of sand, silt, and clay particles in a mass of soil. The basic textural classes, in order of increasing proportion of fine particles, are sand, loamy sand, sandy loam, loam, silt loam, silt, sandy clay loam, clay loam, silty clay loam, sandy clay, silty clay, and clay. The sand, loamy sand, and sandy loam classes may be further divided by specifying "coarse," "fine," or "very fine."
- **Thin layer** (in tables). Otherwise suitable soil material that is too thin for the specified use.
- **Tilth, soil.** The physical condition of the soil as related to tillage, seedbed preparation, seedling emergence, and root penetration.
- **Toeslope.** The gently inclined surface at the base of a hillslope. Toeslopes in profile are commonly gentle and linear and are constructional surfaces forming the lower part of a hillslope continuum that grades to valley or closed-depression floors.
- **Topsoil.** The upper part of the soil, which is the most favorable material for plant growth. It is ordinarily rich in organic matter and is used to topdress roadbanks, lawns, and land affected by mining.
- **Trace elements.** Chemical elements, for example, zinc, cobalt, manganese, copper, and iron, in soils in extremely small amounts. They are essential to plant growth.
- **Tread.** The flat to gently sloping, topmost, laterally extensive slope of terraces, flood-plain steps, or other stepped landforms; commonly a recurring part of a series of natural steplike landforms, such as successive stream terraces.
- **Upland.** An informal, general term for the higher ground of a region, in contrast with a low-lying adjacent area, such as a valley or plain, or for land at a higher elevation than the flood plain or low stream terrace; land above the footslope zone of the hillslope continuum.
- **Weathering.** All physical disintegration, chemical decomposition, and biologically induced changes in rocks or other deposits at or near the earth's surface by

- atmospheric or biologic agents or by circulating surface waters but involving essentially no transport of the altered material.
- **Well graded.** Refers to soil material consisting of coarse grained particles that are well distributed over a wide range in size or diameter. Such soil normally can be easily increased in density and bearing properties by compaction. Contrasts with poorly graded soil.
- Wilting point (or permanent wilting point). The moisture content of soil, on an ovendry basis, at which a plant (specifically a sunflower) wilts so much that it does not recover when placed in a humid, dark chamber.

Tables

Table 1.--Temperature and Precipitation
(Recorded for the period 1971-2000 at Clovis, New Mexico)

	[Te	mperatur	e (Degrees F)		Precip-	itation	(Inche	5)	
		 	2 years in 10 will have			 Average number of		2 years in 10 will have		number tota	total
Month					Minimum temperature less than 	growing	 Average 	less than	more than	w/.1 or more	fall fall
January	50.5	23.6	37.0	 74	 2	 7	0.49	0.06	0.87	 1	3.8
February	56.4	27.5	42.0	 78	5	27	0.42	0.07	0.76	1	2.9
March	63.8	33.0	48.4	 84	1 12	90	0.67	0.15	1.03	1	1.0
April	71.5	40.5	56.0	90	23	225	1.03	0.22	1.74	 2	0.4
May	80.1	50.5	65.3	 96	35	 477	1.93	0.50	3.33	 3	0.0
June	88.3	59.3	73.8	104	 46	 715	2.62	1.17	4.06	 4	0.0
July	90.5	63.4	77.0	102	54	836	2.59	1.27	3.72	 4	0.0
August	87.9	62.0	75.0	99	54	 774	3.51	1.53	5.29	 6	0.0
September	81.9	55.0	68.4	 97	 36	 557	2.17	0.89	3.45	 4	0.0
October	72.4	43.8	58.1	91	 25	278	1.76	0.25	2.90	 3	0.4
November	60.1	32.5	46.3	81	1 12	 64	0.75	0.12	1.39	l 2	1.9
December	51.7	25.0	38.3	 73	l 2	 11	0.70	0.17	1.09	1	3.6
Yearly:		 				 		 			
Average	71.3	43.0	57.1	 	 	 	 			 	
Extreme	110	-7		105	 -3	 	 			 	
Total		 	 	 	 	 4,061 	 18.64 	 14.85 	29.63	 32 	 14.0
					 1 inch of sn			11			l

Average number of days per year with at least 1 inch of snow on the ground: 11

^{*}A growing degree day is a unit of heat available for plant growth. It can be calculated by adding the maximum and minumum daily temperatures, dividing the sum by 2, and subtracting the temperature below which growth is minimal for the principal crops in the area. (Threshold: 50.0 degrees F.)

Table 2.--Freeze Dates in Spring and Fall
(Recorded for the period 1971-2000 at Clovis, New Mexico)

	Temperature						
Probability	24°F or lower 28°F		28°F or 1c	28°F or lower		32°F or lower	
Last freezing temperature in spring:	 		 				
1 year in 10 later than	 April	7	 April	15	 April	30	
2 years in 10 later than	 April	2	 April	10	 April	25	
5 years in 10 later than	 March	23	 April	1	 April	15	
First freezing temperature in fall:	 		 				
1 year in 10 earlier than	 November	2	 October	17	 October	14	
2 years in 10 earlier than	 November	7	 October	23	 October	18	
5 years in 10 earlier than	 November 	17	 November 	3	 October 	27	

Table 3.--Growing Season
(Recorded for the period 1971-2000 at Clovis, New Mexico)

	Dai	Daily Minimum Temperature					
Probability		Number of days less than 28°F 					
9 years in 10	217	 191	 175				
8 years in 10	224	 199	 182				
5 years in 10	238	 215	 193				
2 years in 10	253	230	205				
1 year in 10	260	238	 211				

Table 4.--Acreage and Proportionate Extent of the Soils

Map symbol	 Soil name 	Acres	 Percent
10		12,235	0.9
11	Tucumcari-Hassell clay loams, 0 to 5 percent slopes	2,907	0.9
13	Tucumcari-Redona association, 0 to 5 percent slopes	3,716	0.3
28	Lacoca-San Jon-Rock outcrop complex, 5 to 20 percent slopes	2,042	0.2
31	Chispa-Redona association, 0 to 3 percent slopes	11,937	0.9
32	Regnier-Lacoca-Rock outcrop complex, 3 to 25 percent slopes	176	*
36	Alama silt loam, 1 to 5 percent slopes	2,234	0.2
37	Ima-Gallen association, 2 to 7 percent slopes	767	*
58	Redona-Armesa association, 0 to 5 percent slopes	926	*
60	Chispa-Armesa-Redona association, 2 to 7 percent slopes	1,968	0.1
61	Berwolf-Roswell association, 1 to 15 percent slopes	247	*
AcA	Acuff loam, 0 to 1 percent slopes	280,551	21.1
AcB	Acuff loam, 1 to 3 percent slopes	42,663	3.2
AfA	Amarillo fine sandy loam, 0 to 1 percent slopes	161,742	12.1
AfB	Amarillo fine sandy loam, 1 to 3 percent slopes	12,605	0.9
AnB	Amarillo loamy fine sand, 1 to 3 percent slopes	55,994	4.2
AvA	Arvana fine sandy loam, 0 to 1 percent slopes	2,328	0.2
BcA	Bippus clay loam, 0 to 2 percent slopes, occasionally flooded	14,184	1.1
DRC	Drake soils, 1 to 8 percent slopes	5,167	0.4
EsA	Estacado loam, 0 to 1 percent slopes	50,750	3.8
EsB	Estacado loam, 1 to 3 percent slopes Friona loam, 0 to 1 percent slopes	37,712	2.8
FrA	Gomez loam, 0 to 1 percent slopes	3,201	0.2
GoB	Gomez loamy fine sand, 0 to 3 percent slopes Grier clay, 0 to 2 percent slopes	9,505 1,223	0.7
GrA KmB	Kimberson gravelly loam, 0 to 3 percent slopes	27,183	2.0
LcA	Lazbuddie clay, 0 to 1 percent slopes	4,603	0.3
LoA	Lofton clay loam, 0 to 1 percent slopes	1,629	0.1
McA	McLean clay, 0 to 1 percent slopes, occasionally ponded	1,634	0.1
MsD	Milsand loamy fine sand, 1 to 8 percent slopes	4,049	0.3
MsE	Milsand-Arch complex, 1 to 20 percent slopes	12,437	0.9
NtC	Nutivoli fine sand, 3 to 8 percent slopes	4,785	0.4
NtD	Nutivoli fine sand. 5 to 12 percent slopes	9,490	0.7
0cA	Olton clay loam, 0 to 1 percent slopes	296,102	22.2
0cB	Olton clay loam, 1 to 3 percent slopes	15,775	1.2
PcA	Pep clav loam. 0 to 1 percent slopes	18	*
PcB	Pen clay loam. 1 to 3 percent slopes	1,293	*
PeA	Pep loam. 0 to 1 percent slopes	24,601	1.8
PeB	Pep loam, 1 to 3 percent slopes	18,969	1.4
PMG	Potter-Mobeetie association, 8 to 45 percent slopes	12,918	1.0
PoA	Portales loam, 0 to 1 percent slopes	4,350	0.3
PsA	Posey fine sandy loam, 0 to 1 percent slopes	2,700	0.2
PsB	Posey fine sandy loam, 1 to 3 percent slopes	20,129	1.5
PsC	Posey fine sandy loam, 3 to 8 percent slopes	17,678	1.3
RaA	Randall_clay, 0 to 1 percent_slopes, frequently ponded	2,547	0.2
RcA	Ranco clay, 0 to 1 percent slopes, frequently ponded	768	*
SaA	Slaughter loam, 0 to 2 percent slopes	7,652	0.6
SnC	Spantara fine sand, 1 to 5 percent slopes	29,194	2.2
SpA	Sparenberg clay, 0 to 1 percent slopes, occasionally ponded	1,175	*
SsA W	Sparks loam, 0 to 2 percent slopes	92,939 162	7.0 *
		1,331,560	100.0

^{*} Less than 0.1 percent.

Table 5.--Irrigated and Nonirrigated Yields by Map Unit Component

(Yields in the "N" columns are for nonirrigated areas; those in the "I" columns are for irrigated areas. Yields are those that can be expected under a high level of management. Absence of a yield indicates that the soil is not suited to the crop or the crop generally is not grown on the soil.)

Map symbol and soil name	Lar capab		Cori	n 	Grain s	sorghum	Wheat	
and 3011 name	N	I	N	ı	N I	I	N	I
		 	Bu	Bu	Bu	Bu	Bu	Bu
10: Regnier	7e	 		<u> </u>				
Rock outcrop	8s	 		<u> </u>			!	
Lacoca	7s	 						
11: Tucumcari	6e	 		 		105.00		50.00
Hassell	6c	 	i	i i	i		i i	
13: Tucumcari	6e	 	 	 		 105.00		50.00
Redona	6e	 				115.00		50.00
28: Lacoca	7s	 		 	 			
San Jon	6e	 						
Rock outcrop	8s							
31: Chispa	6s	 						
Redona	6e	 3e				110.00		40.00
32: Regnier	6c	 						
Lacoca	7s	 						
Rock outcrop	8s	 						
36: Alama	6e	 						
37: Ima	6c	 				70.00		
Gallen	6s	 						
58: Redona	6e					115.00		50.00
Armesa	6e							
60: Chispa	6s	 		 				
Armesa	6e	 						
Redona	6e	 4e				85.00		

Table 5.--Irrigated and Nonirrigated Yields by Map Unit Component--Continued

Map symbol and soil name	Lar capabi		Cor	rn	 Grain s	sorghum 	 Wheat		
	N	 I	N I	I	N I	I	N I	I	
61:			Bu	Bu	Bu	Bu	Bu	Bu	
Berwolf	6c								
Roswell	7e								
AcA: Acuff	4c			200.00	30.00	110.00	24.00	70.00	
AcB: Acuff	4c	 2e		200.00	20.00	110.00	20.00	70.00	
AfA: Amarillo	4c	 2e		200.00	25.00	110.00	22.00	70.00	
AfB: Amarillo	4c			200.00	24.00	110.00	20.00	70.00	
AnB: Amarillo	4c	 3e 		190.00	20.00	100.00	15.00	65.00	
AvA: Arvana	6e	 3e 		170.00	20.00	85.00	12.00	55.00	
BcA: Bippus	4c	 2w 		200.00	30.00	110.00	24.00	70.00	
DRC: Drake	6e	 			25.00		14.00		
EsA: Estacado	4c			170.00	20.00	90.00	15.00	55.00	
EsB: Estacado	4c	 		170.00	17.00	80.00	20.00	55.00	
FrA: Friona	4c	 		170.00	18.00	80.00	10.00	50.00	
GoB: Gomez	4e			190.00	17.00	70.00	14.00	60.00	
GrA: Grier	5w	 							
KmB: Kimberson	7s			160.00	15.00	60.00	10.00	45.00	
LcA: Lazbuddie	5w	 							
LoA: Lofton	4c			190.00	22.00	110.00	20.00	65.00	
McA: McLean	4w	 					 		
MsD: Milsand	6e	 			 		 		

Table 5.--Irrigated and Nonirrigated Yields by Map Unit Component--Continued

	Lar							
Map symbol and soil name	capabi	ility 	Cor	⁻n l	Grain s	orghum 	Whe	at
	N I	I 	N	I	N	Ιİ	N	I
MsE:		 	Bu	Bu	Bu	Bu	Bu	Bu
Milsand	6e							
Arch	6e	 						
NtC: Nutivoli	6e	 						
NtD: Nutivoli	6e	 						
OcA: 01ton	4c	 2s		190.00	30.00	110.00	18.00	65.00
OcB: 01ton	4c	 2e		190.00	 25.00	 110.00	15.00	65.00
PcA: Pep	4c	 2e		140.00	18.00	 60.00	16.00	40.00
PcB: Pep	 4c	 3e		130.00	 16.00	 55.00	 14.00	35.00
PeA: Pep	 4c	 2e		 170.00	 	 100.00	 20.00	55.00
PeB: Pep	 4c	 3e		 170.00	 	 100.00	 20.00	55.00
PMG: Potter	 7s	 		 	 	 	 	
Mobeetie	 7e	 				<u> </u>		
PoA: Portales	4c	 2e		170.00	25.00	100.00	20.00	55.00
PsA: Posey	4c	 2e		170.00	20.00	70.00	15.00 15.00	55.00
PsB: Posey	4c	 3e		170.00	15.00	70.00	12.00	50.00
PsC: Posey	4e	 		150.00	12.00	65.00	10.00	50.00
RaA: Randa11	 6w	 						
RcA: Ranco	 6w	 						
SaA: Slaughter	6s				15.00		10.00	
SnC: Spantara	4e	 		190.00	16.00	80.00 80.00	14.00	65.00
SpA: Sparenberg	 4w	 				 	 	

Table 5.--Irrigated and Nonirrigated Yields by Map Unit Component--Continued

Map symbol and soil name		Land capability Corn		-n	 Grain sorghum		 Wheat	
and 3011 name	N	I	N I	I	N I	I	N	I
SsA:	4-	2-	 Bu	Bu	Bu	Bu	Bu	Bu
Sparks	4c 	2e	 	190.00 	24.00 	110.00	20.00 	65.00
W: Water			 	 	 		 	

Table 6.--Rangeland Productivity

(Only the soils that support rangeland vegetation suitable for grazing are rated.)

Map symbol	 Ecological site	Total dr	Total dry-weight production			
and soil name	Ecological Site	Favorable year	Normal year	Unfavorable year		
10.		Lb/acre	Lb/acre	Lb/acre		
10: Regnier	Breaks North Exposure R070XB059NM	1,400	800	600		
Rock outcrop						
Lacoca	Breaks North Exposure R070XB059NM	1,100	700	400		
11: Tucumcari	Clayey R070XB053NM	1,500	900	500		
Hassell	Clayey R070XB053NM	1,500	900	500		
13: Tucumcari	Clayey R070XB053NM	1,500	900	500		
Redona	Loamy R070XB052NM	1,600	1,000	700		
28: Lacoca	Sandstone Savannah R070XB051NM	1,200	750	 400 		
San Jon	Loamy R070XB052NM	1,600	1,000	700		
Rock outcrop						
31: Chispa	Sandy Loam R070XB054NM	 750 	550	300		
Redona	Sandy Loam R070XB054NM	1,600	1,100	700		
32: Regnier	Red Shale R070XB071NM	1,000	700	 500 		
Lacoca	Shallow Sandstone R070XB072NM	1,100	700	400		
Rock outcrop						
36: Alama	Loamy R070XB052NM	1,600	1,000	 700		
37: Ima	Sandy Loam R070XB054NM	1,600	1,100	 700		
Gallen	Gravelly R070XB065NM	 1,450 	950	 450 		

Table 6.--Rangeland Productivity--Continued

Map symbol	 Ecological site	Total dry-weight production				
and soil name	Leorogical site	Favorable year	Normal year	Unfavorable year		
	-	 Lb/acre	Lb/acre	Lb/acre		
58: Redona	 Loamy R070XB052NM	 1,600 	1,000	 700 		
Armesa	 Limy R070XB068NM	 1,400 		 500 		
60: Chispa	 - Sandy Loam R070XB054NM	750	550	300		
Armesa	 Limy R070XB068NM	 1,400 		 500 		
Redona	 Sandy Loam R070XB054NM	1,600	1,100	 700 		
61: Berwolf	 - Sandy Plains R070XB055NM	3,000	2,100	1,500		
Roswell	 Sandhills R070XB061NM	2,500	1,700	1,100		
AcA: Acuff	 - Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 		
AcB: Acuff	 - Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 800		
AfA: Amarillo	 - Sandy Loam PE 25-36 R077CY036TX	2,000	1,400	 800 		
AfB: Amarillo	 - Sandy Loam PE 25-36 R077CY036TX	2,000	1,400	 800 		
AnB: Amarillo	 - 	2,000	1,500	 800 		
AvA: Arvana	 - Sandy Loam PE 25-36 R077CY036TX	2,200	1,700	1,200		
BcA: Bippus	 	3,000	2,400	 1,500 		
DRC: Drake	 - High Lime PE 25-36 R077CY026TX	1,800	1,300	900		
EsA: Estacado	 Limy Upland PE 25-36 R077CY028TX 	 1,800 	1,500	 		

Table 6.--Rangeland Productivity--Continued

Map symbol	 Ecological site	Total dr	Total dry-weight production				
and soil name		Favorable year	Normal year	Unfavorable year			
	 	 Lb/acre	Lb/acre	 Lb/acre			
EsB: Estacado	 Limy Upland PE 25-36 R077CY028TX	1,600	1,100	 700 			
FrA: Friona	 Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 800 			
GoB: Gomez	 Sandy PE 25-36 R077CY035TX	2,400	1,500	 800			
GrA: Grier	 Wet Saline PE 25-36 R077CY689TX	2,200	1,800	1,000			
KmB: Kimberson	 Very Shallow PE 25-36 R077CY037TX	1,400	1,000	 700 			
LcA: Lazbuddie	 Playa PE 25-36 R077CY027TX	3,000	1,200	 500 			
LoA: Lofton	 Deep Hardland PE 25-36 R077CY022TX	1,750	1,250	 700			
McA: McLean	 Playa PE 25-36 R077CY027TX	3,000	1,200	 500 			
MsD: Milsand	 Sand Hills PE 25-36 R077EY063TX	2,400	1,750	1,200			
MsE: Milsand	 Sand Hills PE 25-36 R077CY034TX	2,400	1,750	1,200			
Arch	High Lime PE 25-36 R077CY026TX	1,500	1,200	 800 			
NtC: Nutivoli	 Sand Hills PE 25-36 R077CY034TX	2,400	1,750	 1,200 			
NtD: Nutivoli	 Sand Hills PE 25-36 R077CY034TX	2,400	1,750	1,200			
OcA: Olton	 Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 800 			
OcB: Olton	 Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 800			
PcA: Pep	Limy Upland PE 25-36 R077CY028TX	2,000	1,300	 800			

Table 6.--Rangeland Productivity--Continued

Map symbol	 Ecological site	Total dr	Total dry-weight production				
and soil name		Favorable year	Normal year	Unfavorable year			
		 Lb/acre	Lb/acre	Lb/acre			
PcB: Pep	Limy Upland PE 25-36 R077CY028TX	2,000	1,300	 800 			
PeA: Pep	Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 			
PeB: Pep	 Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 800			
PMG: Potter	Very Shallow PE 25-36 R077EY068TX	1,200	900	 500 			
Mobeetie	Mixedland Slopes PE 25-36 R077EY061TX	1,800	1,200	900			
PoA: Portales	Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 			
PsA: Posey	Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 800 			
PsB: Posey	 Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 800 			
PsC: Posey	 Limy Upland PE 25-36 R077CY028TX	1,800	1,500	 800			
RaA: Randall	Playa PE 25-36 R077CY027TX	3,000	1,200	 500			
RcA: Ranco	Playa PE 25-36 R077CY027TX	3,000	1,200	 500			
SaA: Slaughter	Very Shallow PE 25-36 R077CY037TX	1,400	1,000	 700			
SnC: Spantara	Sandy PE 25-36 R077CY035TX	2,400	1,500	 800			
SpA: Sparenberg	 Playa PE 25-3 R077CY027TX	3,000	1,200	 500			
SsA: Sparks	Deep Hardland PE 25-36 R077CY022TX	1,800	1,500	 			
W: Water				 			
				.			

Table 7.--Camp Areas, Picnic Areas, and Playgrounds

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

	 Pct. of map unit			Picnic areas 		Playgrounds	
	 			Rating class and limiting features			
10: Regnier	35 35 	Slope Depth to bedrock	1.00	Depth to bedrock	1.00	Depth to bedrock	0.50
Rock outcrop	 30	 Not rated	 	 Not rated	 	 Not rated	
Lacoca	 20 	Slope Depth to bedrock	1.00	Depth to bedrock	1.00	· •	 1.00 1.00 0.50
11: Tucumcari	 50	 Not limited		 Not limited	 	 Not limited	
Hassell	 40 		•	 Somewhat limited Slow water movement 	 0.41 	 Somewhat limited Slow water movement Depth to bedrock Slope	 0.41 0.29 0.12
13: Tucumcari	 50 	 Somewhat limited Dusty	0.50	 Somewhat limited Dusty		 Somewhat limited Dusty	0.50
Redona	 40 			 Somewhat limited Dusty 		 Somewhat limited Dusty Slope	 0.50 0.12
28: Lacoca	 35 	Depth to bedrock		Depth to bedrock		 Very limited Depth to bedrock Slope Gravel content	1.00
San Jon	 30 	 Somewhat limited Slope Dusty 	 0.84 0.50 	Slope	 0.84 0.50 	Slope	 1.00 0.50 0.20 0.06
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
31: Chispa	 50	 Not limited		 Not limited	 	 Not limited	
Redona	 40 	 Somewhat limited Too sandy 	0.01	 Somewhat limited Too sandy 	 0.01	 Somewhat limited Too sandy 	0.01

Table 7.--Camp Areas, Picnic Areas, and Playgrounds--Continued

' '	 Pct. of map unit			 Picnic areas 		Playgrounds	
	 			 Rating class and limiting features			Value
32: Regnier	—— 40 41 1	Depth to bedrock	1.00		1.00 0.63	Slope	1.00 0.50
Lacoca	 30 		1.00		1.00	 Very limited Slope Depth to bedrock	 1.00 1.00
Rock outcrop	 15	 Not rated 	 	 Not rated 	 	 Not rated 	
36: Alama	 90 		 0.50 	 Somewhat limited Dusty 	 0.50 	 Somewhat limited Dusty Slope	 0.50 0.12
37: Ima	 70 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.50
Gallen	 20 			 Somewhat limited Gravel content 		 Very limited Gravel content Slope	 1.00 0.88
58: Redona	 50 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
Armesa	 25 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
60: Chispa	 40 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.50
Armesa	30	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.88
Redona	 20 	 Somewhat limited Too sandy 	 0.01 	 Somewhat limited Too sandy 	 0.01 	 Somewhat limited Slope Too sandy	0.50
61: Berwolf	 60 	 Somewhat limited Too sandy 	 0.70 	 Somewhat limited Too sandy 	 0.70	 Somewhat limited Too sandy Slope	 0.70 0.12
Roswell	 20 	 Very limited Too sandy Slope 	 1.00 0.16	 Very limited Too sandy Slope 	 1.00 0.16	 Very limited Too sandy Slope 	 1.00 1.00
AcA: Acuff	 90 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	0.50
	 	 Dusty 	 0.50 	 Dusty 	 0.50 	 Dusty 	0.50

Table 7.--Camp Areas, Picnic Areas, and Playgrounds--Continued

Map symbol and soil name	 Pct. of map unit	 		 Picnic areas 		Playgrounds 	
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
AfA: Amarillo	85	 Not limited		 Not limited		 Not limited	
AfB: Amarillo	85	 Not limited	 	 Not limited	 	 Not limited	
AnB: Amarillo	 85 			 Somewhat limited Too sandy 		 Somewhat limited Too sandy 	 0.70
AvA: Arvana	 85 	 Somewhat limited Depth to cemented pan		 Somewhat limited Depth to cemented pan		 Not limited 	
BcA: Bippus	 85 		 1.00	 Not limited 	 	 Not limited 	
DRC: Drake	 90 	•	 0.50 	 Somewhat limited Dusty 	 0.50		 0.88 0.50
EsA: Estacado	 90 	•	 0.50	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50
EsB: Estacado	 85 		 0.50	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50
FrA: Friona	 85 	 Somewhat limited Depth to cemented pan	•	 Somewhat limited Depth to cemented pan		 Not limited 	
GoB: Gomez	 85 	•	 0.72	 Somewhat limited Too sandy	 0.72	 Somewhat limited Too sandy	 0.72
GrA: Grier	 90 	Ponding Sodium content Slow water movement	 1.00 1.00 0.96 0.10	Sodium content Slow water movement	 1.00 1.00 0.96 0.05	Sodium content Slow water movement	 1.00 1.00 0.96 0.10
KmB: Kimberson	 90 	Depth to cemented pan		pan		1	 1.00 1.00

Table 7.--Camp Areas, Picnic Areas, and Playgrounds--Continued

Map symbol and soil name	 Pct. of map unit			 Picnic areas 		 Playgrounds 	
		 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	
LcA: Lazbuddie	 85 	 Somewhat limited Too clayey Slow water movement			 0.50 0.45		 0.50 0.45
LoA: Lofton	 85 	 Somewhat limited Slow water movement	 0.41 	 Somewhat limited Slow water movement	 0.41 	 Somewhat limited Slow water movement	0.41
McA: McLean	 90 	 Very limited Ponding Too clayey Slow water movement			 1.00 0.50 0.45	Too clayey	 1.00 0.50 0.45
MsD: Milsand	 85 	 Somewhat limited Too sandy 		 Somewhat limited Too sandy 	 0.79 	 Somewhat limited Slope Too sandy	 0.88 0.79
MsE: Milsand	 50 	 Very limited Too sandy Slope		 Very limited Too sandy Slope		 Very limited Too sandy Slope	 1.00 1.00
Arch	 40 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
NtC: Nutivoli	 90 	 Very limited Too sandy 		 Very limited Too sandy 		 Very limited Too sandy Slope	 1.00 0.88
NtD: Nutivoli	 85 	 Very limited Too sandy Slope	 1.00 0.16	 Very limited Too sandy Slope	 1.00 0.16	 Very limited Too sandy Slope	 1.00 1.00
OcA: Olton	95	 Not limited		 Not limited		 Not limited	
OcB: Olton	85	 Not limited		 Not limited		 Not limited	
PcA: Pep	 85	 Not limited		 Not limited		 Not limited	
PcB: Pep	 85	 Not limited	 	 Not limited	 	 Not limited	
PeA: Pep	 85 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50
PeB: Pep	 90 	 Somewhat limited Dusty 	 0.50	 Somewhat limited Dusty 	 0.50	 Somewhat limited Dusty 	0.50

Table 7.--Camp Areas, Picnic Areas, and Playgrounds--Continued

Map symbol and soil name	 Pct. of map unit	i I		 Picnic areas 		 Playgrounds 	
		 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
PMG: Potter	 45 	Slope Dusty		Dusty	 1.00 0.50 0.21	Dusty	 1.00 0.50 0.21
Mobeetie	35		 1.00	 Very limited Slope	 1.00	 Very limited Slope	1.00
PoA: Portales	 90 	•	 0.50 	 - Somewhat limited Dusty 	 0.50 	 - Somewhat limited Dusty 	 0.50
PsA: Posey	 85	 Not limited	 	 Not limited	 	 Not limited	
PsB: Posey	90	 Not limited	 	 Not limited	 	 Not limited	
PsC: Posey	90	 Not limited 	 	 Not limited 	 	 Very limited Slope	1.00
RaA: Randall	 90 	Depth to saturated zone Ponding Too clayey	 1.00 1.00 0.50 0.45	Depth to saturated zone Too clayey	 1.00 1.00 0.50 0.45	saturated zone Ponding Too clayey	 1.00 1.00 0.50 0.45
RcA: Ranco	 90 	Depth to saturated zone Ponding Too clayey	1.00	Depth to saturated zone Too clayey	1.00	saturated zone Ponding Too clayey	 1.00 1.00 0.50 0.45
SaA: Slaughter	 85 	 Very limited Depth to cemented pan		 Very limited Depth to cemented pan		 Very limited Depth to cemented pan	 1.00
SnC: Spantara	 85 		 1.00	 Very limited Too sandy 	 1.00	 Very limited Too sandy Slope	 1.00 0.12
SpA: Sparenberg	 90 	Ponding Too clayey	 1.00 0.50 0.45 		 1.00 0.50 0.45 	Too clayey	 1.00 0.50 0.45

Table 7.--Camp Areas, Picnic Areas, and Playgrounds--Continued

Map symbol and soil name	 Pct. of	 Camp areas 		 Picnic areas 		 Playgrounds 	
	map unit	 		 		 	
	 	Rating class and limiting features	Value 	Rating class and limiting features	Value 	Rating class and limiting features 	Value
SsA: Sparks	 85 	 Somewhat limited Dusty Slow water movement	 0.50 0.41	 Somewhat limited Dusty Slow water movement	 0.50 0.41	,	 0.50 0.41
W: Water	 100 	 Not rated 	 	 Not rated 	 	 Not rated -	

Table 8--Paths, Trails, and Golf Course Fairways

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	Pct. of map unit			Off-road motorcycle trai 	1s	 Golf course fairw 	ays
	 	Rating class and limiting features		Rating class and limiting features		Rating class and limiting features	Value
10: Regnier	35	Slope	 1.00 1.00 0.50	Slope	 1.00 1.00 0.50	Droughty	 1.00 1.00 1.00
Rock outcrop	30	 Not rated		 Not rated		 Not rated	ļ
Lacoca	 20 		 1.00 0.50 	 Very limited Slope Dusty 	 1.00 0.50 		 1.00 1.00 1.00
11: Tucumcari	 50	 Not limited	į	 Not limited	į	 Not limited	į
Hassell	İ	İ	İ	Not limited	İ	 Somewhat limited Depth to bedrock	0.29
13: Tucumcari	 50	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	0.50	 Not limited 	
Redona	 40 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Not limited 	
28: Lacoca	 35 	 Not limited 	 	 Not limited 	 	 Very limited Droughty Depth to bedrock Slope Large stones content	 1.00 1.00 0.84 0.68
San Jon	 30 		 1.00 0.50	 Very limited Water erosion Dusty	 1.00 0.50		 0.84 0.20
Rock outcrop	1 15	 Not rated		 Not rated		 Not rated 	
31: Chispa	50	 Not limited	 	 Not limited		 Not limited	
Redona	 40 	 Somewhat limited Too sandy	 0.01	 Somewhat limited Too sandy	 0.01	 Not limited 	

Table 8.--Paths, Trails, and Golf Course Fairways--Continued

		 I				 	
Map symbol and soil name	Pct. of map unit	 	S	Off-road motorcycle trai 	1s	Golf course fairw 	ays
		Rating class and limiting features		Rating class and limiting features		Rating class and limiting features	Value
32:	.	 				 	
Regnier	40 			Very limited Water erosion Dusty 	 1.00 0.50 	Droughty	 1.00 1.00 0.63
Lacoca	30		 0.02 	 Not limited 	 	 Very limited Droughty Depth to bedrock Slope	 1.00 1.00 1.00
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
36: Alama	 90 		 0.50	 Somewhat limited Dusty 	 0.50	 Not limited 	i
37: Ima	j 70	 Not limited	<u>.</u> !	 Not limited	<u> </u> 	 Not limited	į Į
Gallen	 20 	 Not limited 	 	 Not limited 	 	Gravel content	 0.85 0.22 0.01
58: Redona	 50	 Not limited	 	 Not limited	 	 Not limited	
Armesa	 25 	 Not limited 	 	 Not limited 	 	 Very limited Carbonate content	 1.00
60:	 	 	 	 	 	 	
Chispa	40	Not limited	į	Not limited	į	Not limited	į
Armesa	30	 Not limited 	 	 Not limited 	 	 Very limited Carbonate content	1.00
Redona	 20 		 0.01	 Somewhat limited Too sandy	0.01	 Not limited 	
61: Berwolf	 60 	 Somewhat limited Too sandy	 0.70	 Somewhat limited Too sandy	 0.70	 Not limited 	
Roswell	20		 1.00	 Very limited Too sandy 	1.00	 Somewhat limited Droughty Slope	 0.48 0.16
AcA: Acuff	90	 Somewhat limited Dusty 	 0.50	 Somewhat limited Dusty 	 0.50	 Not limited 	
AcB: Acuff	90		 0.50	 Somewhat limited Dusty 	 0.50	 Not limited 	
AfA: Amarillo	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	

Table 8.--Paths, Trails, and Golf Course Fairways--Continued

Map symbol and soil name	 Pct. of map unit	 	S	 Off-road motorcycle trai 	1s	Golf course fairways 		
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value	
AfB: Amarillo	 85	 Not limited	 	 Not limited	 	 Not limited	 	
AnB: Amarillo	 85 		 0.70	 Somewhat limited Too sandy 	0.70	 Not limited 	 	
AvA: Arvana	 85 	 Not limited 	 	 Not limited 	 	 Somewhat limited Depth to cemented pan	 0.35 	
BcA: Bippus	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	; 	
DRC: Drake	 90 		 0.50	 Somewhat limited Dusty	0.50	 Not limited 	 	
EsA: Estacado	 90 		 0.50	 Somewhat limited Dusty	0.50	 Not limited 	 	
EsB: Estacado	 85 		 0.50	 Somewhat limited Dusty	0.50	 Not limited 	 	
FrA: Friona	 85 	 Not limited 	 	 Not limited 	 	 Somewhat limited Depth to cemented pan	 0.46 	
GoB: Gomez	 85 			 Somewhat limited Too sandy 	0.72	 Not limited 	 	
GrA: Grier	 90 			 Very limited Ponding 	 1.00 		 1.00 1.00 0.05	
KmB: Kimberson	 90 	 Not limited 	 	 Not limited 	 	,		
LcA: Lazbuddie	 85 		 0.50	 Somewhat limited Too clayey	0.50	 Very limited Too clayey	 1.00	
LoA: Lofton	 85	 Not limited	 	 Not limited		 Not limited	 	

Table 8.--Paths, Trails, and Golf Course Fairways--Continued

Map symbol and soil name	Pct. of map unit	 	S	 Off-road motorcycle trai 	ls	 Golf course fairwa 	ays
	 	 Rating class and limiting features				 Rating class and limiting features	Value
McA: McLean	 90	 Very limited Ponding		 Very limited Ponding		 Very limited Too clayey	 1.00
		Too clayey 	0.50 		0.50 		1.00
MsD: Milsand	 85 			 Somewhat limited Too sandy 		 Somewhat limited Droughty 	 0.99
MsE: Milsand	 50 			 Very limited Too sandy 		,	 1.00 1.00
Arch	 40 	 Not limited 	 	 Not limited 	 	 Very limited Carbonate content 	 1.00
NtC: Nutivoli	 90 	 Very limited Too sandy 		 Very limited Too sandy 	 1.00	 Somewhat limited Droughty 	 0.39
NtD: Nutivoli	 85 			 Very limited Too sandy 		, ,	 0.59 0.16
OcA: Olton	 95 	 Not limited 	; 	 Not limited 	 	 Not limited 	;
OcB: Olton	 85 	 Not limited 	; 	 Not limited 	 	 Not limited 	
PcA: Pep	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	
PcB: Pep	 85 	 Not limited 	 	 Not limited 		 Not limited 	
PeA: Pep	 85 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty 	 0.50	 Not limited 	
PeB: Pep	 90 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Not limited 	
PMG: Potter	 45 	 Very limited Water erosion Dusty Slope	 1.00 0.50 0.32	 Very limited Water erosion Dusty 	 1.00 0.50	Slope	 1.00 1.00 0.45
Mobeetie	35	 Very limited Water erosion Slope	 1.00 0.98	 Very limited Water erosion 	1.00	 Very limited Slope 	 1.00
PoA: Portales	 90 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Not limited 	

Table 8.--Paths, Trails, and Golf Course Fairways--Continued

and soil name	 Pct. of map unit	f		 Off-road motorcycle trai 	ls	Golf course fairways	
	 		Value	Rating class and limiting features	Value	Rating class and limiting features	Value
PsA: Posey	 85	 Not limited	 	 Not limited	 	 Not limited	
PsB: Posey	 90	 Not limited	 	 Not limited	; 	 Not limited	;
PsC: Posey	 90 	 Not limited	 	 Not limited 	; 	 Not limited 	
RaA: Randall	 90 	Depth to saturated zone Ponding	 1.00 1.00 0.50	saturated zone Ponding	 1.00 1.00 0.50	 Ponding	 1.00 1.00 1.00
RcA: Ranco	 90 	Depth to saturated zone Ponding	 1.00 1.00 0.50	saturated zone Ponding 	 1.00 1.00 0.50	 Depth to saturated zone	 1.00 1.00 1.00
SaA: Slaughter	 85 	 Not limited 	 	 Not limited 	 	 Very limited Depth to cemented pan Droughty	 1.00 0.29
SnC: Spantara	 85 			 Very limited Too sandy	 1.00	 Not limited 	
SpA: Sparenberg	 90 	Ponding	 1.00 0.50		 1.00 0.50	, ,	 1.00 1.00
SsA: Sparks	 85 	 Somewhat limited Dusty	 0.50	 Somewhat limited Dusty	 0.50	 Not limited 	
W: Water	 100 	 Not rated 	 	 Not rated 	 	 Not rated 	

Table 9.--Dwellings and Small Commercial Buildings

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	Pct. Dwellings without		Dwellings with basements		Small commercial buildings 		
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
10: Regnier	 35 	Slope Shrink-swell 	 1.00 0.50 0.50	Depth to soft bedrock	 1.00 1.00 0.50	Depth to soft bedrock	 1.00 1.00 0.50
Rock outcrop	30	 Not rated		 Not rated	 	 Not rated	
Lacoca	 20 	Slope	 1.00 1.00 		 1.00 1.00 	· · · · · · · · · · · · · · · · · · ·	 1.00 1.00
11: Tucumcari		 	į	 	į	 Somewhat limited	
rucumcari	30	Shrink-swell	•	Somewhat limited Shrink-swell	0.50		0.50
Hassell	 40 	 Very limited Shrink-swell 	 1.00 	Shrink-swell	 1.00 0.29		1.00
13: Tucumcari	 50 	 Somewhat limited Shrink-swell	0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
Redona	 40 	 Somewhat limited Shrink-swell		 Somewhat limited Shrink-swell		 Somewhat limited Shrink-swell	0.50
28: Lacoca	 35 	 Very limited Depth to hard bedrock Slope	 1.00 0.84	bedrock	1.00 	 Very limited Depth to hard bedrock Slope	 1.00 1.00
San Jon	 30 	 Somewhat limited Slope Shrink-swell 	 0.84 0.50 	 Somewhat limited Slope Shrink-swell Depth to soft bedrock	 0.84 0.50 0.20	 Very limited Slope Shrink-swell 	 1.00 0.50
Rock outcrop	15	 Not rated		 Not rated	 	 Not rated	-
31: Chispa	 50	 Not limited	 	 Not limited	 	 Not limited	
Redona	 40 	 Somewhat limited Shrink-swell 	 0.50 	 Somewhat limited Shrink-swell 	 0.50 	 Somewhat limited Shrink-swell 	0.50

Table 9.--Dwellings and Small Commercial Buildings--Continued

and soil name	 Pct. of map unit	basements 	ut	 Dwellings with basements 		 Small commercial buildings 	
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
32:	 						
Regnier	40 	Slope 	0.63	bedrock	1.00	bedrock	1.00
	 	•	0.50 0.50 		0.63 0.50 		1.00 0.50
Lacoca	 30 		 1.00	 Very limited Depth to hard bedrock	 1.00	 Very limited Slope 	1.00
	 		1.00	Slope 	1.00	Depth to hard bedrock	1.00
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
36: Alama	 90 	•	 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50
37: Ima	 70	 Not limited		 Not limited	 	 Not limited	<u> </u>
Gallen	 20 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	 0.12
58: Redona	 50 		 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
Armesa	 25 	 Not limited 	 	 Not limited 	 	 Not limited 	
60: Chispa	 40	 Not limited	 	 Not limited	 	 Not limited	i I
Armesa	 30 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
Redona	 20 	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
61: Berwolf	 60	 Not limited		 Not limited	 	 Not limited	
Roswell	 20 		 0.16	 Somewhat limited Slope	 0.16	 Very limited Slope	 1.00
AcA: Acuff	 90 	 Not limited 	 	 Not limited 	 	 Not limited 	
AcB: Acuff	 90	 Not limited		 Not limited	 	 Not limited	
AfA: Amarillo	 85	 Not limited	 	 Not limited	 	 Not limited	
AfB: Amarillo	 85 	 Not limited 	! 	 Not limited 	! 	 Not limited 	

Table 9.--Dwellings and Small Commercial Buildings--Continued

Map symbol and soil name	Pct. of map unit	basements	ut	Dwellings with basements		Small commercia buildings 	11
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
AnB: Amarillo	 85	 Not limited 	 	 Not limited 	 	 Not limited 	-
AvA: Arvana	 85 	 Not limited 	 	 Somewhat limited Depth to thin cemented pan	 0.35 	 Not limited 	
BcA: Bippus	 85 	Flooding	 1.00 0.50		 1.00 0.50		 1.00 0.50
DRC: Drake	 90 	 Not limited 	i 	 Not limited 	 	 Somewhat limited Slope	0.12
EsA: Estacado	 90 	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50
EsB: Estacado	85	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
FrA: Friona	 85 	 Not limited 	 	 Somewhat limited Depth to thin cemented pan	 0.46	 Not limited 	
GoB: Gomez	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	
GrA: Grier	90		1.00 0.50	Depth to	1.00 1.00	Shrink-swell	 1.00 0.50
	 	 Depth to saturated zone	 0.10 	saturated zone Shrink-swell 	1.00		0.10
KmB: Kimberson	 90 	 Somewhat limited Depth to thin cemented pan	 0.50 	 - Very limited Depth to thin cemented pan	 1.00 	 Somewhat limited Depth to thin cemented pan	1.00
LcA: Lazbuddie	 85 	 Very limited Shrink-swell	 1.00	 Very limited Shrink-swell	1.00	 Very limited Shrink-swell	1.00
LoA: Lofton	85	 Very limited Shrink-swell	 1.00	 Somewhat limited Shrink-swell	0.50	 Very limited Shrink-swell	1.00
McA: McLean	 90 	Ponding	 1.00 1.00		 1.00 1.00		 1.00 1.00

Table 9.--Dwellings and Small Commercial Buildings--Continued

Map symbol and soil name	 Pct. of map unit	basements 	ut	Dwellings with basements		Small commercial buildings 	
	 	 Rating class and limiting features	Value	 Rating class and limiting features		 Rating class and limiting features	Value
MsD: Milsand	 85 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
MsE: Milsand	 50 		 1.00	 Very limited Slope	1.00	 Very limited Slope	1.00
Arch	40	 Not limited 	 	 Not limited 	 	 Not limited 	
NtC: Nutivoli	 90 	 Not limited 	 	 Not limited 	 	 Somewhat limited Slope	0.12
NtD: Nutivoli	 85 		 0.16	 Somewhat limited Slope	 0.16	 Very limited Slope	1.00
OcA: Olton	 95 			 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
OcB: Olton	 85 		 0.50	 Somewhat limited Shrink-swell	0.50	 Somewhat limited Shrink-swell	0.50
PcA: Pep	 85 	 Somewhat limited Shrink-swell	 0.01	 Not limited 	 	 Somewhat limited Shrink-swell	0.01
PcB: Pep	 85 		 0.01	 Not limited 	 	 Somewhat limited Shrink-swell	0.01
PeA: Pep	 85 		 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
PeB: Pep	 90 	 Not limited 	 	 Somewhat limited Shrink-swell	 0.50	 Not limited 	
PMG: Potter	 45 	Slope	 1.00 0.76	 Very limited Slope Large stones content	 1.00 0.76 	 Very limited Slope Large stones content	 1.00 0.76
Mobeetie	 35 	 Very limited Slope	 1.00	 Very limited Slope	 1.00	 Very limited Slope	1.00
PoA: Portales	 90 		 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	0.50
PsA: Posey	 85	 Not limited 	 	 Not limited 	 	 Not limited 	

Table 9.--Dwellings and Small Commercial Buildings--Continued

Map symbol and soil name	 Pct. of map unit	basements	Dwellings without basements 			 Small commercial buildings 	
	 	Rating class and limiting features	Value 	Rating class and limiting features	Value 	Rating class and limiting features	Value
PsB: Posey	 90 	 Not limited 		 Not limited 		 Not limited 	
PsC: Posey	 90 	 Not limited 	 	 Not limited 		 Somewhat limited Slope	0.50
RaA: Randall	 90 	 Very limited Ponding Depth to saturated zone Shrink-swell	 1.00 1.00 1.00	saturated zone	 1.00 1.00 1.00	Depth to saturated zone	 1.00 1.00 1.00
RcA: Ranco	 90 	Ponding	 1.00 1.00 1.00	 Very limited Ponding Depth to saturated zone Shrink-swell	 1.00 1.00 1.00	saturated zone	 1.00 1.00 1.00
SaA: Slaughter	 85 	 Somewhat limited Shrink-swell Depth to thin cemented pan	 0.50 0.50	 Very limited Depth to thin cemented pan Shrink-swell	 1.00 0.50	cemented pan	 1.00 0.50
SnC: Spantara	 85	 Not limited		 Not limited		 Not limited	
SpA: Sparenberg	 90 	 Very limited Ponding Shrink-swell	 1.00 1.00	 Very limited Ponding Shrink-swell	 1.00 1.00	, , ,	 1.00 1.00
SsA: Sparks	 85 	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Shrink-swell	 0.50
W: Water	 100 	 Not rated 	 	 Not rated 		 Not rated 	

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	Pct. of map unit	streets 		Shallow excavati 	ons	Lawns and landscaping - -	
	 			Rating class and limiting features		 Rating class and limiting features	
10:	i						-
Regnier	35 	 Very limited Slope 	1.00	Very limited Depth to soft bedrock	1.00	 Very limited Slope 	1.00
	į Į	bedrock	1.00	Slope 	1.00	j	1.00
		Shrink-swell	0.50	Cutbanks cave	0.10	Depth to bedrock	1.00
Rock outcrop	 30 	 Not rated 	 	 Not rated 	 	 Not rated 	
Lacoca	20	Depth to hard		Very limited Depth to hard	1.00	 Very limited Slope	1.00
	 	bedrock Slope 	1.00	bedrock Slope Cutbanks cave	 1.00 0.10	,	1.00
11:	 	 	 	 	 	 	l I
Tucumcari	50 	Low strength	1.00	Somewhat limited Cutbanks cave	0.10	 Not limited 	
		Shrink-swell	0.50	Too clayey	0.01	 	
Hassell	 40 	 Very limited Low strength 	1.00	 Somewhat limited Depth to soft bedrock	 0.29 	 Somewhat limited Depth to bedrock 	0.29
	<u> </u> 	Shrink-swell	1.00	Cutbanks cave Too clayey	0.10		<u> </u>
13:	 	 	 	 	l I	 	}
Tucumcari	50 	 Very limited Low strength Shrink-swell		Somewhat limited Cutbanks cave Too clayey	 0.10 0.01	 Not limited 	
Redona	 40 	 Somewhat limited Shrink-swell		 Somewhat limited Cutbanks cave	0.10	 Not limited 	
28:	i		i	 	i	 	i
Lacoca	35	Very limited Depth to hard bedrock		Very limited Depth to hard bedrock	1.00	Very limited Droughty	1.00
		Slope 	0.84	Slope Cutbanks cave 	0.84 0.10 	Depth to bedrock Slope Large stones content	1.00 0.84 0.68
San Jon	 30 	 Somewhat limited Slope	 0.84		 0.84	 Somewhat limited Slope	0.84
		Low strength	0.78	bedrock	0.20	Depth to bedrock 	0.20
		Shrink-swell 	0.50 	Cutbanks cave 	0.10 	 	
Rock outcrop	15	Not rated	i	Not rated	i	 Not rated	i

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping--Continued

and soil name	 Pct. of map unit	streets	d	 Shallow excavati 	ons	 Lawns and landsca 	ping
	 	 Rating class and limiting features	Value	 Rating class and limiting features 		 Rating class and limiting features	Value
31: Chispa	 50	 Very limited Low strength	1.00	 Somewhat limited Cutbanks cave	0.10	 Not limited	
Redona	 40 	 Somewhat limited Shrink-swell		 Somewhat limited Cutbanks cave	0.10	 Not limited 	
32: Regnier	 40 	 Somewhat limited Depth to soft bedrock Slope Shrink-swell	 1.00 0.63 0.50	bedrock Slope	 1.00 0.63 0.10	 Droughty	 1.00 1.00 0.63
Lacoca	 30 	Depth to hard bedrock	 1.00 1.00	bedrock Slope	 1.00 1.00 0.10	Depth to bedrock	 1.00 1.00 1.00
Rock outcrop	 15	 Not rated	 	 Not rated		 Not rated	
36: Alama	 90 	Low strength	 1.00 0.50	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
37: Ima	 70 	 Not limited 	 	 Somewhat limited Cutbanks cave	 0.10	 Not limited 	
Gallen	 20 	 Not limited 	 	 Very limited Cutbanks cave 	 1.00 		 0.85 0.22 0.01
58: Redona	 50 	 Somewhat limited Shrink-swell	0.50	 Somewhat limited Cutbanks cave	 0.10	 Not limited 	
Armesa	 25 	 Not limited 		 Somewhat limited Cutbanks cave	0.10	 Very limited Carbonate content	1.00
60: Chispa	 40 	 Very limited Low strength	1.00	 Somewhat limited Cutbanks cave	 0.10	 Not limited 	
Armesa	 30 	 Not limited 	 	 Somewhat limited Cutbanks cave	 0.10	 Very limited Carbonate content	 1.00
Redona	 20 	 Somewhat limited Shrink-swell	 0.50	 Somewhat limited Cutbanks cave	 0.10	 Not limited 	

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping--Continued

Map symbol and soil name	 Pct. of map unit	streets 	d	 Shallow excavati 	ons	 Lawns and landsca 	ping
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
61: Berwolf	 60	 Not limited 	 	 Somewhat limited Cutbanks cave		 Not limited 	
Roswell	 20 		 0.16 	 Very limited Cutbanks cave Slope	 1.00 0.16		 0.48 0.16
AcA: Acuff	 90 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	
AcB: Acuff	90	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	;
AfA: Amarillo	 85 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
AfB: Amarillo	 85 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
AnB: Amarillo	 85 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	
AvA: Arvana	 85 	 Not limited 	 	 Somewhat limited Depth to thin cemented pan Cutbanks cave	 0.35 0.10	 Somewhat limited Depth to cemented pan 	 0.35
BcA: Bippus	 85 	Low strength	0.78	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	;
DRC: Drake	90	 Not limited 	; 	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	;
EsA: Estacado	90	 Very limited Low strength Shrink-swell	 1.00 0.50	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
EsB: Estacado	85	 Very limited Low strength Shrink-swell	 1.00 0.50	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	
FrA: Friona	 85 	 Very limited Low strength 	 1.00 	 Somewhat limited Depth to thin cemented pan Cutbanks cave 	 0.46 0.10	 Somewhat limited Depth to cemented pan 	 0.46

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping--Continued

Map symbol and soil name	 Pct. of map unit	streets 	d	 Shallow excavati 	ons	 Lawns and landsca 	ping
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
GoB: Gomez	 85 	 Not limited 	 	 Very limited Cutbanks cave	1.00		
GrA: Grier	 90 	Ponding	 1.00 0.50	Ponding	 1.00 1.00	Sodium content	 1.00 1.00
	 	İ	0.22 0.05	Cutbanks cave 	0.10 	Depth to saturated zone 	0.05
KmB: Kimberson	 90 		 1.00 	cemented pan	 1.00 1.00	pan Carbonate content Droughty	
LcA: Lazbuddie	 85 	Low strength	 1.00 1.00	Cutbanks cave	 1.00 0.50	 Very limited Too clayey 	 1.00
LoA: Lofton	 85 		 1.00 1.00		 0.28 0.10	 Not limited 	
McA: McLean	 90 	Shrink-swell Ponding	1.00 1.00	Cutbanks cave	 1.00 1.00 0.88	Ponding	 1.00 1.00
MsD: Milsand	 85 	 Not limited 	 	 Very limited Cutbanks cave 	 1.00	 Somewhat limited Droughty 	 0.99
MsE: Milsand	 50 	 Very limited Slope 	 1.00	 Very limited Cutbanks cave Slope	 1.00 1.00		 1.00 1.00
Arch	 40 	 Not limited 	 	 Somewhat limited Cutbanks cave	 0.10	 Very limited Carbonate content	 1.00
NtC: Nutivoli	 90 	 Not limited 	 	 Very limited Cutbanks cave 	 1.00	 Somewhat limited Droughty 	 0.39
NtD: Nutivoli	 85 	 Somewhat limited Slope 	 0.16 	 Very limited Cutbanks cave Slope 	 1.00 0.16		 0.59 0.16

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping--Continued

Map symbol and soil name	 Pct. of map unit	streets	d	 Shallow excavati 	ons	 Lawns and landsca 	ping
	 	 Rating class and limiting features	Value	 Rating class and limiting features	Value	 Rating class and limiting features	Value
OcA: Olton	 95 	Low strength	 1.00 0.50		 0.10 		
OcB: Olton	 85 	Low strength	 1.00 0.50	•	 0.10 0.02	•	
PcA: Pep	 85 	Low strength	 1.00 0.01	•	 0.10 	 Not limited 	
PcB: Pep	 85 		 1.00 0.01		 0.10 	 Not limited 	
PeA: Pep	 85 	Low strength	 1.00 0.50	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
PeB: Pep	 90 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	
PMG: Potter	 45 	Slope	 1.00 0.76	Large stones content	1.00 0.76 	Slope 	1.00
Mobeetie	 35 	 Very limited Slope 	 1.00	Cutbanks cave Very limited Slope Cutbanks cave	0.10 1.00 0.10	 Very limited Slope	0.45 1.00
PoA: Portales	 90 	Low strength	 1.00 0.50	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	
PsA: Posey	 85 	 Not limited 	 	 Somewhat limited Cutbanks cave	 0.10	 Not limited 	
PsB: Posey	 90 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10	 Not limited 	
PsC: Posey	 90 	 Not limited 	 	 Somewhat limited Cutbanks cave 	 0.10 	 Not limited 	

Table 10.--Roads and Streets, Shallow Excavations, and Lawns and Landscaping--Continued

	Map symbol and soil name	 Pct. of map unit	streets	·		ons	 Lawns and landsca 	ping
Randall		 						Value
Saturated zone Low strength 1.00 Too clayey 1.00		 90 	Shrink-swell Ponding 	1.00	Ponding Depth to saturated zone	1.00 1.00 	Too clayey Ponding	 1.00 1.00
Ranco		 	saturated zone	İ	İ	i		1.00
Slaughter		 90 	Shrink-swell Ponding Depth to saturated zone	1.00 1.00 1.00	Ponding Depth to saturated zone Cutbanks cave	1.00 1.00 1.00	Ponding Depth to saturated zone	 1.00 1.00 1.00
Spantara		 85 	Depth to thin cemented pan Low strength	1.00 1.00	Depth to thin cemented pan	1.00	Depth to cemented pan	 1.00 0.29
Sparenberg		 85 	 Not limited 	 		•	 Not limited 	
Sparks		 90 	Shrink-swell Ponding	1.00 1.00	Ponding Cutbanks cave	1.00	Ponding	 1.00 1.00
		 85 	Low strength	1.00	•		 Not limited 	
		 100 	 Not rated 	 	 Not rated 		 Not rated 	

Table 11.--Sewage Disposal

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	Pct. of map unit	•		Sewage lagoons	
	 			 Rating class and limiting features	
10: Regnier	35	Depth to bedrock	1.00 	bedrock	1.00
	 	ĺ	1.00 	Slope 	1.00
Rock outcrop	30 	Not rated 		Not rated 	
Lacoca	20	Very limited Depth to bedrock			 1.00
	į	 Slope	1.00	Slope	1.00
11: Tucumcari	 50 		 1.00	 Not limited 	
Hassell	 40 	 Very limited Slow water movement Depth to bedrock	1.00	bedrock	 1.00 0.08
13: Tucumcari	 50 		 1.00	 Not limited 	
Redona	 40 	Slow water	 0.46	 Somewhat limited Seepage	0.53
	!	movement 	! !	 Slope	0.08
28: Lacoca	 35 	 Very limited Depth to bedrock		 Very limited Depth to hard bedrock	1.00
	ļ	 Slope	0.84	Slope	1.00
San Jon	 30 	 Very limited Slow water movement Depth to bedrock Slope	1.00 	 Very limited Depth to soft bedrock Slope Seepage	 1.00 1.00 0.27
Rock outcrop	 15 	 Not rated 	 	 Not rated 	

Table 11.--Sewage Disposal--Continued

	Pct. Of map unit	absorption fiel	ds	 Sewage lagoons 	
	 			 Rating class and limiting features	
31: Chispa	 50 			 Somewhat limited Seepage 	 0.53
Redona	 40 	 Somewhat limited Slow water movement		 Somewhat limited Seepage 	 0.53
32: Regnier	 40 	Depth to bedrock		bedrock	 1.00 1.00
Lacoca	 30 	Depth to bedrock	1.00	 Very limited Depth to hard bedrock Slope	 1.00 1.00
Rock outcrop	 15	 Not rated	 	 Not rated	
36: Alama	 90 			 Somewhat limited Slope 	 0.08
37: Ima	 70 	 Not limited 	 	 Very limited Seepage Slope	 1.00 0.32
Gallen	 20 			 Very limited Seepage Slope	 1.00 0.68
58: Redona	 50 	 Somewhat limited Slow water movement 	 0.46 	 Somewhat limited Seepage Slope	 0.53 0.08
Armesa	 25 	 Somewhat limited Slow water movement 	 0.46 	 Somewhat limited Seepage Slope 	 0.53 0.08

Table 11.--Sewage Disposal--Continued

Map symbol and soil name	 Pct. of map unit	absorption field 	 Sewage lagoons 		
	 	 Rating class and limiting features		 Rating class and limiting features	
60: Chispa	 40 		 0.46	 - Somewhat limited Seepage 	 0.53
	 	 	Í I	Slope	0.32
Armesa	 30 		 0.46 	 Somewhat limited Slope 	 0.68
	 	 	ĺ I	Seepage	0.53
Redona	20		 0.46	 Somewhat limited Seepage	0.53
	į			Slope	0.32
61: Berwolf	 60 	 Not limited 	 		 1.00 0.08
Roswell	 20 			 Very limited Seepage 	 1.00
	į		0.16	Slope	1.00
AcA: Acuff	 90 		 0.46	 Somewhat limited Seepage 	 0.53
AcB: Acuff	 90 	•	 0.46 	 Somewhat limited Seepage 	 0.53
AfA: Amarillo	 85 		 0.46 	 Somewhat limited Seepage 	 0.53
AfB: Amarillo	 85 		 0.50 	 Somewhat limited Seepage 	 0.53
AnB: Amarillo	 85 		 0.46 	 Somewhat limited Seepage 	 0.53
AvA: Arvana	 85 	 Very limited Depth to cemented pan Slow water movement		pan	 1.00 0.53

Table 11.--Sewage Disposal--Continued

Map symbol and soil name	 Pct. of map unit	absorption field	ds	Sewage lagoons 		
	 	 Rating class and limiting features		 Rating class and limiting features		
BcA: Bippus	 85 	Slow water movement	0.46	İ	 0.53	
	 	Flooding 	0.40 	Flooding 	0.40 	
DRC: Drake	 90 		 0.50 	 Somewhat limited Slope 	 0.68 	
	i i	 	j i	Seepage 	0.50	
EsA: Estacado	 90 	•	 0.46 	 Somewhat limited Seepage 	 0.53 	
EsB: Estacado	 85 		 0.46 	 Somewhat limited Seepage 	 0.53	
FrA: Friona	 85 	Depth to cemented pan		pan	 1.00 0.53	
	j I	movement 	 		 	
GoB: Gomez	 85 	 Not limited 	 	 Very limited Seepage 	 1.00	
GrA: Grier	 90 			 Very limited Ponding 	 1.00	
	 		1.00	Depth to saturated zone	1.00	
	 	 Depth to saturated zone	1.00	•	 	
KmB: Kimberson	 90 	 Very limited Depth to cemented pan 		pan	 1.00 0.53	
LcA: Lazbuddie	 85 		 1.00 	 Not limited 	 	
LoA: Lofton	 85 		 1.00 	 Not limited 	 	

Table 11.--Sewage Disposal--Continued

	 Pct. of map unit	absorption fiel	ds	Sewage lagoons		
	 	 Rating class and limiting features	Value	 Rating class and limiting features		
McA: McLean	 90 	Slow water movement		 Very limited Ponding 	1.00	
MsD: Milsand	 85 		 1.00 	 Very limited Seepage Slope	 1.00 0.68	
MsE: Milsand	 50 	 Very limited Filtering capacity Slope	1.00	 Very limited Seepage Slope	 1.00 1.00	
Arch	 40 	 Somewhat limited		 Very limited Seepage 	1.00	
NtC: Nutivoli	 90 		 1.00 	Slope Very limited Seepage Slope	0.08 1.00 0.68	
NtD: Nutivoli	 85 	Filtering capacity	1.00	 Very limited Seepage Slope	 1.00 1.00	
OcA: Olton	 95 	 Very limited Slow water movement	 1.00	 Not limited 	 	
OcB: Olton	 85 	 Very limited Slow water movement	 1.00 	 Not limited 	 	
PcA: Pep	 85 	 Somewhat limited Slow water movement	 0.50 	 Somewhat limited Seepage 	 0.50 	
PcB: Pep	 85 	 Somewhat limited Slow water movement	 0.50 	 Somewhat limited Seepage 	 0.50	

Table 11.--Sewage Disposal--Continued

	 Pct. of map unit	absorption fiel	 Sewage lagoons 	Sewage lagoons		
	 	 Rating class and limiting features		 Rating class and limiting features		
PeA: Pep	 85 		1.00	 Not limited 		
PeB: Pep	 90 	:	 1.00	 Somewhat limited Seepage 	 0.53	
PMG: Potter	 45 	Slope Large stones content	1.00 0.76 	 Very limited Slope Large stones content Seepage	 1.00 0.74 0.53	
Mobeetie	 35 	 Very limited Slope 	 1.00 	 Very limited Slope Seepage	 1.00 1.00	
PoA: Portales	 90 		 0.46 	 Somewhat limited Seepage 	 0.53	
PsA: Posey	 85 		 0.46 	 Somewhat limited Seepage 	0.53	
PsB: Posey	 90 	 Somewhat limited Slow water movement	 0.46 	 Somewhat limited Seepage	 0.53 	
PsC: Posey	 90 	 Somewhat limited Slow water movement	 0.46 	 Somewhat limited Slope Seepage	 0.92 0.53	
RaA: Randall	 90 91 1 1	 Very limited Slow water movement Ponding Depth to saturated zone	 1.00 1.00 1.00	 Very limited Ponding	 1.00 1.00	

Table 11.--Sewage Disposal--Continued

and soil name	 Pct. of map unit	absorption field	ds	Sewage lagoons		
	 			 Rating class and limiting features	Value	
RcA: Ranco	 90 	Slow water movement	 1.00 		 1.00 	
	 	İ	 1.00 	saturated zone	1.00 	
SaA: Slaughter	 85 	 Very limited Depth to cemented pan 		pan	 1.00 0.28	
SnC: Spantara	 85 	 Not limited 	 	1 1: 3 -	 1.00 0.08	
SpA: Sparenberg	 90 	Slow water movement	 1.00 1.00	 Very limited Ponding 	 1.00 	
SsA: Sparks	 85 		 1.00 	 Not limited 	 	
W: Water	 100 	 Not rated 	 	 Not rated 	 	

Table 12.--Landfills

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

and soil name	Pct. of map unit	l landfill	y	Area sanitary landfill 		Daily cover for landfill	
	 	Rating class and limiting features		Rating class and limiting features			
10:	 	l	———— 	l		l ————————————————————————————————————	————
Regnier	35 		1.00	 Very limited Slope 	 1.00 	 Very limited Depth to bedrock Slope	 1.00 1.00
Rock outcrop	 30	 Not rated 	! 	 Not rated 	 	 Not rated 	
Lacoca	 20 		1.00			 Very limited Depth to bedrock Slope	 1.00 1.00
11: Tucumcari	 50	 Not limited	 	 Not limited	; !	 Not limited	<u> </u>
Hassell	 40 	 Very limited Depth to bedrock 		 Not limited 	 	 Very limited Hard to compact Depth to bedrock	
13:	 	 	 	 		 	
Tucumcari	50 	Not limited 	 	Not limited 	 	Not limited 	
Redona	40	 Not limited		 Not limited	į	 Not limited	į
28:	 	 	 	 	 	 	
Lacoca	35 	Depth to bedrock		Somewhat limited Slope 	 0.84 	Slope	 1.00 0.84 0.50
San Jon	 30 	Depth to bedrock		 Somewhat limited Slope 	 0.84 		 1.00 0.84
Rock outcrop	 15 	 Not rated 	 	I Not rated I	 	 Not rated 	
31: Chispa	 50	 Not limited	 	 Not limited	 	 Not limited	
Redona	40	 Not limited		 Not limited	į	 Not limited	į
32: Regnier	 40 	Depth to bedrock	 1.00 0.63	 Somewhat limited Slope 	 0.63	 Very limited Depth to bedrock Slope	 1.00 0.63
Lacoca	 30 	Depth to bedrock		 Very limited Slope 	 1.00 	 Very limited Depth to bedrock Slope	 1.00 1.00
Rock outcrop	1 15	 Not rated		 Not rated	 	 Not rated	

Table 12.--Landfills--Continued

Map symbol and soil name	 Pct. of map unit	l landfill	 Area sanitary landfill 		Daily cover for landfill		
	 	Rating class and limiting features	Value	Rating class and limiting features		Rating class and limiting features	Value
36: Alama	 90	 Not limited	 	 Not limited 	 	 Not limited 	
37: Ima	 70 	 Not limited 	 	 Not limited 	; 	 Somewhat limited Seepage	 0.52
Gallen	 20 	 Not limited 	 	 Not limited 	 		 1.00 1.00
58: Redona	 50	 Not limited	į Į	 Not limited		 Not limited	į Į
Armesa	 25 	 Not limited 		 Not limited 	 	 Very limited Carbonate content	 1.00
60: Chispa	40	 Not limited		 Not limited	 	 Not limited	
Armesa	 30 	 Not limited 	 	 Not limited 	 	 Very limited Carbonate content	 1.00
Redona	 20	 Not limited		 Not limited	 	 Not limited 	
61: Berwolf	 60 	 Not limited 		 Not limited 	 	 Somewhat limited Seepage	 0.52
Roswell	 20 		 1.00 0.16	 Somewhat limited Slope 	 0.16 	Seepage	 1.00 1.00 0.16
AcA: Acuff	 90	 Not limited	 	 Not limited	 	 Not limited	
AcB: Acuff	90	 Not limited		 Not limited	 	 Not limited	
AfA: Amarillo	 85	 Not limited		 Not limited	 	 Not limited	
AfB: Amarillo	 85	 Not limited		 Not limited	 	 Not limited	
AnB: Amarillo	 85	 Not limited		 Not limited	 	 Not limited	
AvA: Arvana	 85 	 Somewhat limited Depth to thin cemented pan 	 0.50 	 Very limited Depth to cemented pan 		 Very limited Depth to cemented pan 	 1.00

Table 12.--Landfills--Continued

Map symbol and soil name	Pct. of map unit	landfill		Area sanitary landfill 		Daily cover for landfill		
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value	
BcA: Bippus	 85 	Too clayey	 0.50 0.40		 0.40 	 Somewhat limited Too clayey 	 0.50	
DRC: Drake	 90	 Not limited 	 	 Not limited	 	 Not limited 	 	
EsA: Estacado	90	 Not limited 	 	 Not limited 	 	 Not limited 	 	
EsB: Estacado	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	 	
FrA: Friona	 85 	Depth to thin cemented pan	 0.50 0.50	 Very limited Depth to cemented pan		pan	 1.00 0.50	
GoB: Gomez	 85 		 0.50 	 Not limited 	 		 0.52 0.50	
GrA: Grier	 90 	Depth to saturated zone	 1.00 1.00	İ	 1.00 1.00	ĺ	 1.00 1.00	
	 	İ	 1.00 0.50	saturated zone 	 	saturated zone	 0.71 0.50	
KmB: Kimberson	 90 	 Somewhat limited	 0.50 	 Very limited Depth to cemented pan		 Very limited Depth to cemented pan	 1.00 0.09	
LcA: Lazbuddie	 85 	 Very limited Too clayey 	 1.00 	 Not limited 	 	 - Very limited Too clayey Hard to compact 	 1.00 1.00	
LoA: Lofton	 85 	 Somewhat limited Too clayey	 0.50	 Not limited 	 	 Somewhat limited Too clayey	 0.50	
McA: McLean	 90 	 Very limited Ponding Too clayey 	 1.00 1.00 	 Very limited Ponding 	 1.00 	Too clayey	 1.00 1.00 1.00	

Table 12.--Landfills--Continued

Map symbol and soil name	 Pct. of map unit	l landfill		Area sanitary landfill 		Daily cover for landfill 	
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
MsD: Milsand	 85 		 1.00		 		 1.00 1.00
MsE: Milsand	 50 	Too sandy	 1.00 1.00	 Very limited Slope 	 1.00 	Seepage	 1.00 1.00 1.00
Arch	 40 	 Not limited 	 	 Not limited 	 	 Very limited Carbonate content Seepage	 1.00 0.52
NtC: Nutivoli	 90 		 1.00 	 Not limited 	 	•	 1.00 1.00
NtD: Nutivoli	 85 	Too sandy	 1.00 0.16 	 Somewhat limited Slope 	 0.16 	Seepage	 1.00 1.00 0.16
OcA: Olton	 95 	 Not limited 	 	 Not limited 	 	 Not limited 	
OcB: Olton	 85 	 Not limited 	 	 Not limited 		 Not limited 	
PcA: Pep	; 85 	 Not limited 	; 	 Not limited 	 	 Not limited 	i
PcB: Pep	; 85 	 Not limited 	; 	 Not limited 	 	 Not limited 	
PeA: Pep	 85 	 Not limited	 	 Not limited		 Not limited	
PeB: Pep	 90 	 Not limited	 	 Not limited		 Not limited	
PMG: Potter	 45 	 Very limited Slope Large stones content	 1.00 0.96	 Very limited Slope 	 1.00 	Slope 	1.00
Mobeetie	 35 	 Very limited Slope 	 1.00 	 Very limited Slope 	 1.00	•	0.96 1.00 0.52

Table 12.--Landfills--Continued

Map symbol and soil name	 Pct. of map unit	l landfill	у	 Area sanitary landfill 		Daily cover for I andfill		
	 		Value	Rating class and limiting features		 Rating class and limiting features	Value	
PoA: Portales	 90	 Not limited	 	 Not limited		 Not limited	 	
PsA: Posey	 85 	 Not limited 	 	 Not limited	! 	 Not limited 	 	
PsB: Posey	 90 		 0.50	 Not limited 	 	 Somewhat limited Too clayey	 0.50	
PsC: Posey	 90 	 Not limited 	 	 Not limited 	 	 Not limited 	 	
RaA: Randall	 90 	Depth to saturated zone	 1.00 1.00 1.00	j	 1.00 1.00 	Depth to saturated zone Too clayey	 1.00 1.00 1.00 1.00	
RcA: Ranco	 90 		 1.00 1.00 1.00	ĺ	 1.00 1.00 	Depth to saturated zone Too clayey	 1.00 1.00 1.00	
SaA: Slaughter	 85 		 0.50 0.50	 Very limited Depth to cemented pan 		pan	 1.00 0.50	
SnC: Spantara	 85 	 Not limited 	 	 Not limited 	 	 Somewhat limited Seepage	 0.52	
SpA: Sparenberg	 90 	 Very limited Ponding Too clayey 	 1.00 1.00	 Very limited Ponding 	 1.00 	 Very limited Ponding Too clayey	 1.00 1.00 1.00	
SsA: Sparks	 85 	 Not limited 	 	 Not limited 	 	 Not limited 	 	
W: Water	 100 	 Not rated 	 	 Not rated 	 	 Not rated 	 	

Table 13.--Source of Gravel and Sand

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The ratings given for the thickest layer are for the thickest layer above and excluding the bottom layer. The numbers in the value columns range from 0.00 to 0.99. The greater the value, the greater the likelihood that the bottom layer or thickest layer of the soil is a source of sand or gravel. See text for further explanation of ratings in this table.)

	 Pct. of map unit	gravel	 Potential source sand 	Potential source of sand		
	 	 Rating class	Value	 Rating class	Value	
10: Regnier	 35 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
Rock outcrop	 30 	 Not rated 		 Not rated 		
Lacoca	 20 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	0.00	
11: Tucumcari	 50 		0.00	 Poor Bottom layer Thickest layer	0.00	
Hassell	 40 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
13: Tucumcari	 50 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
Redona	 40 	Bottom layer	0.00	 Poor Bottom layer Thickest layer 	 0.00 0.00	
28: Lacoca	 35 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
San Jon	 30 			 Poor Bottom layer Thickest layer	0.00	
Rock outcrop	 15 	 Not rated 	 	 Not rated 		
31: Chispa	 50 	 - Poor Bottom layer Thickest layer	 0.00 0.00		 0.00 0.00	
Redona	 40 	 Poor Bottom layer Thickest layer 	 0.00 0.00		 0.00 0.02	

Table 13.--Source of Gravel and Sand--Continued

and soil name	 Pct. of map unit	gravel	of	Potential source of sand		
	 	 Rating class	Value	 Rating class	Value	
32: Regnier	 40 	Bottom layer	0.00		0.00	
Lacoca	 30 	Bottom layer	0.00	 Fair Thickest layer Bottom layer	 0.00 0.02	
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	
36: Alama	 90 	Bottom layer	0.00	 Poor Bottom layer Thickest layer 	 0.00 0.00	
37: Ima	 70 		0.00	 Fair Thickest layer Bottom layer	 0.00 0.02	
Gallen	 20 	Bottom layer	0.25	 Fair Bottom layer Thickest layer 	 0.03 0.03	
58: Redona	 50 		0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
Armesa	 25 	Bottom layer	0.00	 Poor Bottom layer Thickest layer 	 0.00 0.00	
60: Chispa	 40 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00	
Armesa	 30 	 Poor Bottom layer Thickest layer	 0.00 0.00		 0.00 0.01	
Redona	 20 	 Poor Bottom layer Thickest layer 	 0.00 0.00		0.00	
61: Berwolf	 60 	 Poor Bottom layer Thickest layer	 0.00 0.00	•	0.00	
Roswell	 20 	 Poor Bottom layer Thickest layer 	 0.00 0.00		 0.13 0.13	

Table 13.--Source of Gravel and Sand--Continued

and soil name	 Pct. of map unit	İ	of	 Potential source sand 	of
	 	 Rating class	Value	 Rating class 	Value
AcA: Acuff	 90 		0.00	 Poor Bottom layer Thickest layer	0.00
AcB: Acuff	 90 	 Poor Bottom layer Thickest layer	0.00	 Poor Bottom layer Thickest layer	0.00
AfA: Amarillo	 85 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	0.00
AfB: Amarillo	 85 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	0.00
AnB: Amarillo	 85 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	0.00
AvA: Arvana	 85 	 Poor Bottom layer Thickest layer		 Poor Bottom layer Thickest layer	0.00
BcA: Bippus	 85 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	0.00
DRC: Drake	 90 		0.00		0.00
EsA: Estacado	 90 		0.00		0.00
EsB: Estacado	 85 		 0.00 0.00		0.00
FrA: Friona	 85 		0.00	 Poor Bottom layer Thickest layer	0.00
GoB: Gomez	 85 		0.00	 Fair Bottom layer Thickest layer 	 0.05 0.06

Table 13.--Source of Gravel and Sand--Continued

and soil name	 Pct. of map unit	İ	of	 Potential source sand 	e of
	 	Rating class	Value	Rating class	Value
GrA: Grier	 90 	Bottom layer			 0.00 0.00
KmB: Kimberson	 90 	Bottom layer		 Poor Bottom layer Thickest layer	 0.00 0.00
LcA: Lazbuddie	 85 	Bottom layer	0.00	 Poor Bottom layer Thickest layer	 0.00 0.00
LoA: Lofton	 85 		0.00	 Poor Bottom layer Thickest layer	0.00
McA: McLean	 90 		0.00	 Poor Bottom layer Thickest layer	0.00
MsD: Milsand	 85 		0.00	 Fair Thickest layer Bottom layer	 0.06 0.14
MsE: Milsand	 50 		0.00	 Fair Bottom layer Thickest layer	 0.28 0.28
Arch	 40 		0.00	 Poor Bottom layer Thickest layer 	 0.00 0.00
NtC: Nutivoli	 90 	 Poor Bottom layer Thickest layer	 0.00 0.00	·	0.14
NtD: Nutivoli	 85 	 Poor Bottom layer Thickest layer	 0.00 0.00	 Fair Bottom layer Thickest layer	0.14
OcA: Olton	 95 	 Poor Bottom layer Thickest layer	0.00		 0.00 0.00
OcB: Olton	 85 	 Poor Bottom layer Thickest layer 	 0.00 0.00		 0.00 0.00

Table 13.--Source of Gravel and Sand--Continued

	 Pct. of map unit	gravel	of	 Potential source sand 	e of
	 	 Rating class	Value	Rating class	Value
PcA: Pep	 85 		0.00		 0.00 0.00
PcB: Pep	 85 		0.00	 Poor Bottom layer Thickest layer	0.00
PeA: Pep	 85 	 Poor Bottom layer Thickest layer	0.00	 Poor Bottom layer Thickest layer	0.00
PeB: Pep	 90 		0.00	 Poor Bottom layer Thickest layer	0.00
PMG: Potter	 45 		0.00	 Poor Bottom layer Thickest layer	 0.00 0.00
Mobeetie	 35 		0.00	 Fair Thickest layer Bottom layer 	 0.01 0.01
PoA: Portales	 90 		0.00	 Poor Bottom layer Thickest layer	 0.00 0.00
PsA: Posey	 85 		0.00	 Poor Bottom layer Thickest layer	0.00
PsB: Posey	 90 		 0.00 0.00		0.00
PsC: Posey	 90 		 0.00 0.00	•	 0.00 0.00
RaA: Randall	 90 		 0.00 0.00	 Poor Bottom layer Thickest layer	0.00
RcA: Ranco	 90 		 0.00 0.00		 0.00 0.00

Table 13.--Source of Gravel and Sand--Continued

Map symbol and soil name	 Pct. of map unit	gravel	Potential source of sand			
	 	 Rating class	Value	 Rating class	Value	
SaA: Slaughter	 85 	 Poor Bottom layer Thickest layer	0.00	 Poor Bottom layer Thickest layer	0.00	
SnC: Spantara	 85 	 Poor Bottom layer Thickest layer	 0.00 0.00	 Fair Thickest layer Bottom layer	 0.01 0.07	
SpA: Sparenberg	 90 	 Poor Bottom layer Thickest layer	 0.00 0.00	 Poor Bottom layer Thickest layer	0.00	
SsA: Sparks	 85 	 Poor Bottom layer Thickest layer	0.00	 Poor Bottom layer Thickest layer	0.00	
W: Water	 100 	 Not rated 	 	 Not rated 		

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.00 to 0.99. The smaller the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	 Pct. of map unit	reclamation material 		 Potential source roadfill 	of	 Potential source of topsoil 	
	 			Rating class and limiting features			Value
10: Regnier	35 35 	Droughty Depth to bedrock Organic matter content low Carbonate content	0.00 0.00 0.18 	Slope	•	Depth to bedrock	0.88
Rock outcrop	 30 	 Not rated 	 	 Not rated 	 	 Not rated 	
Lacoca	 20 	Droughty Depth to bedrock	0.00 0.00 0.88		•		
11: Tucumcari	 50 	Too clayey	0.02		 0.00 0.87		 0.01
Hassell	 40 	Too clayey Organic matter content low Carbonate content Depth to bedrock Water erosion	0.00 0.50 0.68	Depth to bedrock Shrink-swell	0.00		 0.00 0.71
13: Tucumcari	 	Too clayey Organic matter content low	0.02 0.50	Shrink-swell	 0.00 0.87 	İ	 0.01
Redona	 40 	content low Carbonate content	0.18	 Fair Shrink-swell 	 0.87 	 Fair 	

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

and soil name	Pct. of map unit	reclamation material		Potential source of roadfill		Potential source of topsoil	
		 Rating class and limiting features		Rating class and limiting features		 Rating class and limiting features	Value
28:							————
Lacoca	35	Droughty Depth to bedrock	0.00	Poor Depth to bedrock 		Rock fragments	 0.00 0.12 0.16
San Jon	30 		 0.18 	 Poor Depth to bedrock 		 Fair Slope 	 0.16
		Droughty Carbonate content Depth to bedrock			0.22 0.87 		
 Rock outcrop 	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
31: Chispa	 50 		0.88 	 Poor Low strength 	 0.00 	 Good 	
Redona 	 40 		 0.88 	 Fair Shrink-swell 	 0.87 	 Good 	
32: Regnier 	 40 	Droughty Depth to bedrock Organic matter content low Carbonate content	0.00 0.00 0.88		 0.00 0.87 	Slope	 0.00 0.37 0.97
Lacoca	30	Droughty Depth to bedrock	0.88 	 Poor Depth to bedrock Slope 	 0.00 0.98 		 0.00 0.00
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
36: Alama	90	content low	 0.12 0.90	 Poor Low strength Shrink-swell	 0.00 0.87	 Good 	

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

and soil name	 Pct. of map unit	reclamation material		Potential source of roadfill		Potential source of topsoil	
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
37:		 	 	<u> </u>	. 	l 	
Ima	70 	Organic matter content low	0.12 	ĺ	 	Fair Too sandy 	 0.99
Gallen	 20 	Fair Organic matter	•	Fair	 0.99	•	
	 	content low Droughty Carbonate content	 0.08 0.92	 	 	(rock fragments) Rock fragments 	 0.00
58: Redona	 50 	 Fair Organic matter content low		 Fair Shrink-swell 	0.87	 Good 	
Armesa	 25 	Carbonate content Organic matter content low	•	 Good 	 	 Poor Carbonate content 	 0.00
60:	 	 	 	 	 	<u> </u>	
Chispa	40 	•	0.12	Good 	 	 Fair Carbonate content 	 0.99
Armesa	 30 	Carbonate content Organic matter content low	 0.00 0.50 0.99	 Good 	 	 Poor Carbonate content 	 0.00
Redona	 20 		 0.88 	 Fair Shrink-swell 	0.87	 Good 	
61: Berwolf	 60 		 0.00 0.88	 Good 	 	 Good 	
Roswell	 20 	Wind erosion Organic matter content low	 0.00 0.00 0.05 	 Good 	 	 Poor Too sandy Slope 	 0.00 0.84
AcA: Acuff	 90 	content low	 0.00 0.02 0.99	 Good 	 	 Good 	

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	Pct. of map unit	reclamation material		Potential source of roadfill 		Potential source of topsoil	
		 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
AcB: Acuff	 90 	content low	 0.00 0.02 0.99	 Good 	 		
AfA: Amarillo	 85 	Carbonate content	 0.00 0.40	 Good 	 	 Good 	
AfB: Amarillo	 85 	Carbonate content	 0.00 0.18 	 Good 	 	 Good 	
AnB: Amarillo	 85 	Wind erosion Carbonate content Organic matter content low	 0.00 0.00 0.08 	 Good 	 	 Good 	
AvA: Arvana	 85 	Carbonate content Organic matter content low Depth to cemented pan Droughty	 0.02 	 Poor Depth to cemented pan 	:	 Fair Depth to cemented pan 	 0.65
BcA: Bippus	 85 	Organic matter content low	 0.50 0.98	 Fair Low strength Shrink-swell	 0.22 0.93	 Fair Too clayey 	 0.64
DRC: Drake	 90 	 - Fair Organic matter content low Sodium content Carbonate content	 0.18 0.78 0.99	 Good 	 	 Fair Sodium content 	 0.78
EsA: Estacado	 90 	content low Too clayey	 0.32 0.88 0.98		 0.00 0.96 	 - Fair Too clayey - 	 0.70

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	 Pct. of map unit	reclamation mater	·		of Potential source topsoil		of
	 	Rating class and limiting features		Rating class and limiting features	Value 	Rating class and limiting features	Value
EsB: Estacado	 - 85 	Carbonate content Organic matter content low	 0.08 0.08 0.99	. 3	 0.00 0.97 	 Good 	
FrA: Friona	 	Carbonate content Organic matter content low Depth to cemented pan Droughty Too clayey	 0.50 	 Poor Depth to cemented pan Low strength 	•	 Fair Depth to cemented pan Too clayey 	 0.54 0.64
GoB: Gomez	 85 	Carbonate content Organic matter content low Too sandy	 0.00 0.00 0.18 0.50 0.99	 Good 	 	Carbonate content	 0.50 0.63 0.97
GrA: Grier	 90 	content low Carbonate content Sodium content	 0.08 0.32 0.90 0.99	•	 0.00 0.35 0.73	 Salinity Wetness depth	 0.47 0.50 0.73 0.90
KmB: Kimberson	90	Depth to cemented pan Carbonate content Organic matter content low	ĺ	 Poor Depth to cemented pan 	 0.00 	pan	 0.03
LcA: Lazbuddie	 - 85 	 Poor Too clayey Organic matter content low 	 0.00 0.88 	 Poor Low strength Shrink-swell 	 0.00 0.12 	 Poor Too clayey 	 0.00

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	Pct. of map unit	reclamation material		Potential source roadfill 	Potential source of roadfill		of
		Rating class and limiting features		Rating class and limiting features		Rating class and limiting features	Value
LoA: Lofton	 - 85 	Too clayey	0.00 0.18 	 Poor Low strength Shrink-swell 	 0.00 0.67 		0.00
McA: McLean	 - 90 		 0.00 	 - Poor Shrink-swell Low strength	 0.00 0.00		 0.00
MsD: Milsand	 - 85 	Wind erosion Too sandy Organic matter content low	 0.00 0.02 0.18 	 Good 	 		 0.02 0.76
MsE: Milsand	 - 50 	Too sandy Wind erosion Organic matter content low	 0.00 0.00 0.08 	 Good 	 	 Poor Too sandy Slope 	0.00
Arch	 - 40 	Carbonate content	 0.00 0.02	 Good 	 	 Poor Carbonate content 	 0.00
NtC: Nutivoli	 - 90 	Too sandy Wind erosion	 0.00 0.00 0.18	 Good 	 	 Poor Too sandy 	 0.00
NtD: Nutivoli	 - 85 	Wind erosion	 0.00 0.00 0.02	 Good 	 	 Poor Too sandy Slope 	 0.00 0.84
OcA: Olton	 - 95 	content low Carbonate content	 0.02 0.08 0.50	 Poor Low strength Shrink-swell	 0.00 0.87	 Fair Too clayey 	 0.27

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	Pct. of map unit	reclamation material		Potential source roadfill 	of	Potential source of topsoil	
	 	Rating class and limiting features		Rating class and limiting features		Rating class and limiting features	Value
OcB: Olton	85 85 	Carbonate content	 0.00 0.08 0.08		 0.00 0.87 	 Poor Too clayey 	 0.00
PcA: Pep	 85 	Organic matter content low Carbonate content	 0.18 0.68 0.98	 Poor Low strength 	 0.00 	 Fair Too clayey 	 0.61
PcB: Pep	 85 	Organic matter content low Carbonate content	 0.18 0.68 0.98	 Poor Low strength 	 0.00 	 Fair Too clayey 	 0.61
PeA: Pep	 85 	content low Too clayey	 0.16 0.18 0.98		 0.00 0.87 		 0.58
PeB: Pep	 90 	Carbonate content Organic matter content low	 0.16 0.18 0.99		 0.00 0.99 	 Good 	
PMG: Potter	 45 	Carbonate content Organic matter content low Cobble content Stone content Droughty	 0.00 0.00 0.35 0.91 0.95 0.99	 Poor Cobble content Slope Stone content	 0.00 0.68 0.97	(rock fragments) Rock fragments	0.00
Mobeetie	35 	Organic matter content low	 0.02 0.99	 Fair Slope 	 0.02 	 Poor Slope 	 0.00

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	Pct. of map unit	reclamation mater		Potential source roadfill	of	Potential source topsoil	of
	 	 Rating class and limiting features		 Rating class and limiting features	Value	 Rating class and limiting features	Value
PoA: Portales	90	Organic matter content low Carbonate content Too clayey	0.08 	 Shrink-swell	 0.00 0.92		 0.64
PsA: Posey	 85 	content low	•	 Fair Low strength 	 0.78 	 Fair Carbonate content 	 0.99
PsB: Posey	 90 	content low	 0.00 0.08 0.99	 Good 	 	 Fair Carbonate content 	 0.99
PsC: Posey	 90 	content low	•	 Fair Low strength 	 0.78 	 Good 	
RaA: Randall	90	Too clayey	 0.00 0.18 	 Poor Wetness depth Shrink-swell Low strength	 0.00 0.00 0.00		0.00
RcA: Ranco	 90 		 0.00 0.18 	 Poor Wetness depth Shrink-swell Low strength	 0.00 0.00 0.00	 Poor Too clayey Wetness depth 	 0.00 0.00
SaA: Slaughter	 85 	 Poor Depth to cemented pan Droughty Carbonate content Too clayey Organic matter content low Water erosion	0.01	 Poor Depth to cemented pan Low strength Shrink-swell 	 0.00 0.00 0.87 	 Poor Depth to cemented pan Too clayey 	 0.00 0.07

Table 14.--Source of Reclamation Material, Roadfill, and Topsoil--Continued

Map symbol and soil name	Pct. of map unit	reclamation mater	Potential source of reclamation material 		of	Potential source of topsoil 		
	 	 Rating class and limiting features	Value		Value	 Rating class and limiting features	Value	
SnC: Spantara	 85 	 Poor Wind erosion Organic matter content low	 0.00 0.24	 Good 		 Good 		
SpA: Sparenberg	 90 	 Poor Too clayey Organic matter content low	 0.00 0.60	 Poor Shrink-swell Low strength 	 0.00 0.00	 Poor Too clayey 	0.00	
SsA: Sparks	 85 	 Fair Organic matter content low Too clayey Water erosion	 0.18 0.98 0.99	 Poor Low strength Shrink-swell	 0.00 0.87	 Fair Too clayey 	0.58	
W: Water	 100 	 Not rated 	 	 Not rated 	 	 Not rated 		

Table 15.--Ponds and Embankments

(The information in this table indicates the dominant soil condition but does not eliminate the need for onsite investigation. The numbers in the value columns range from 0.01 to 1.00. The larger the value, the greater the limitation. See text for further explanation of ratings in this table.)

Map symbol and soil name	 Pct. of map unit		eas	 Embankments, dikes levees 	, and	 Aquifer-fed excavated pond 	s
	 	Rating class and limiting features	Value 	 Rating class and limiting features	Value	 Rating class and limiting features	
10: Regnier	 35 		1.00	 Very limited Thin layer Piping			1.00
Rock outcrop	30	Not rated	 	 Not rated		 Not rated	
Lacoca	 20 		1.00			 Very limited Depth to water 	1.00
11: Tucumcari	 50 		•			 Very limited Depth to water	1.00
Hassell	 40 	 Somewhat limited Depth to bedrock		Thin layer		 Very limited Depth to water 	1.00
13: Tucumcari	 50 		 0.04	 Somewhat limited Piping		 Very limited Depth to water	1.00
Redona	 40 		 0.72	 Not limited 		 Very limited Depth to water	1.00
28: Lacoca	 35 	Depth to bedrock		 Very limited Thin layer 		 Very limited Depth to water 	1.00
San Jon	 30 	Slope	1.00	Piping Thin layer			1.00
Rock outcrop	 15 	 Not rated 	 	 Not rated 	 	 Not rated 	
31: Chispa	 50 		 0.72	 Somewhat limited Piping		 Very limited Depth to water	1.00
Redona	40 		 0.72	 Somewhat limited Seepage 	•	 Very limited Depth to water 	1.00

Table 15.--Ponds and Embankments--Continued

Map symbol and soil name	Pct. Of map	 	eas	 Embankments, dikes levees 	, and	 Aquifer-fed excavated pond 	s
	 	Rating class and limiting features		Rating class and limiting features			Value
32: Regnier	 40 		1.00		 1.00 0.78	 Very limited Depth to water	1.00
Lacoca	 30 		1.00			 Very limited Depth to water 	1.00
Rock outcrop	 15 	 Not rated 		 Not rated 	 	 Not rated 	
36: Alama	 90 			 Somewhat limited Piping 		 Very limited Depth to water 	1.00
37: Ima	 70 	Seepage	 1.00 0.08	 Somewhat limited Seepage 		 Very limited Depth to water 	1.00
Gallen	 20 		 1.00 0.32		 0.25 	 Very limited Depth to water 	1.00
58: Redona	 50 	 Somewhat limited Seepage	 0.72	 Not limited 	 	 Very limited Depth to water	1.00
Armesa	 25 		0.72	 Not limited 	 	 Very limited Depth to water	1.00
60: Chispa	 40 	Seepage		 Somewhat limited Piping 		 Very limited Depth to water 	1.00
Armesa	 30 	 Somewhat limited Seepage Slope			 0.01 	 Very limited Depth to water 	1.00
Redona	 20 	 Somewhat limited Seepage Slope	 0.72 0.08	 Somewhat limited Seepage 	 0.02 	 Very limited Depth to water 	1.00
61: Berwolf	 60 	 Very limited Seepage	 1.00	 Somewhat limited Seepage	 0.03	 Very limited Depth to water	1.00
Roswell	20 20 	 Very limited Seepage Slope	 1.00 1.00	 Somewhat limited Seepage 	 0.13 	 Very limited Depth to water 	1.00
AcA: Acuff	 90 	 Somewhat limited Seepage 	 0.72 	 Very limited Piping 	 0.99 	 Very limited Depth to water 	 1.00

Table 15.--Ponds and Embankments--Continued

Map symbol and soil name	Pct. Of map unit	 	eas	 Embankments, dikes 	, and	Aquifer-fed excavated pond 	ls
	 			 Rating class and limiting features			
AcB: Acuff	 90 			 Very limited Piping		 Very limited Depth to water	1.00
AfA: Amarillo	 85 			 Somewhat limited Piping	0.92	 Very limited Depth to water	1.00
AfB: Amarillo	 85 			 Somewhat limited Piping	0.97	 Very limited Depth to water	1.00
AnB: Amarillo	 85 		 0.72	 Not limited 	 	 Very limited Depth to water	1.00
AvA: Arvana	 85 	Depth to cemented pan	0.83 	l .		 Very limited Depth to water 	1.00
BcA: Bippus	 85 	 Somewhat limited	 	 Somewhat limited	 	 Very limited Depth to water	 1.00
DRC: Drake	 90 	Seepage		Piping		 Very limited Depth to water 	 1.00
EsA: Estacado	 90 		 0.72			 Very limited Depth to water	1.00
EsB: Estacado	 85 	 Somewhat limited Seepage	 0.72	 Somewhat limited Piping	0.88	 Very limited Depth to water	1.00
FrA: Friona	 85 	 Somewhat limited Depth to cemented pan Seepage	 0.86 0.72	 - Somewhat limited Thin layer - Piping	 0.86 0.72	 Very limited Depth to water 	1.00
GoB: Gomez	 85 	 Very limited Seepage	 	 Somewhat limited Seepage	i I	 Very limited Depth to water	1.00
GrA: Grier	 90 	 Somewhat limited Seepage 	 0.04 	 Very limited Ponding Piping Depth to saturated zone 	 1.00 1.00 0.96	Cutbanks cave	 0.96 0.10 0.06 0.02

Table 15.--Ponds and Embankments--Continued

Map symbol and soil name	 Pct. of map unit	 	eas	 Embankments, dikes 	, and	 Aquifer-fed excavated pond 	s
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
KmB: Kimberson	 90 	Depth to cemented pan		 Very limited Thin layer 		 Very limited Depth to water 	1.00
LcA: Lazbuddie	 85 	 Not limited 	 	 Somewhat limited Hard to pack 		 Very limited Depth to water 	 1.00
LoA: Lofton	 85 	 Not limited 	 	 Not limited 	 	 Very limited Depth to water	1.00
McA: McLean	 90 	 Not limited 	 	 Very limited Ponding Hard to pack	 1.00 1.00	•	1.00
MsD: Milsand	 85 	Seepage	 1.00 0.32	 Somewhat limited Seepage 		 Very limited Depth to water 	1.00
MsE: Milsand	 50 	Seepage	 1.00 1.00	 Somewhat limited Seepage 		 Very limited Depth to water 	1.00
Arch	 40 			 Somewhat limited Piping 		 Very limited Depth to water 	1.00
NtC: Nutivoli	 90 	Seepage	 1.00 0.32		 0.25 	 Very limited Depth to water	1.00
NtD: Nutivoli	 85 	 Very limited Seepage Slope	 1.00 1.00	 Somewhat limited Seepage 	 0.25	 Very limited Depth to water 	1.00
OcA: Olton	 95 	 Somewhat limited Seepage	 0.04	 Somewhat limited Piping	 0.29	 Very limited Depth to water	1.00
OcB: Olton	 85 	 Somewhat limited Seepage	 0.04	 Somewhat limited Piping	 0.21	 Very limited Depth to water	1.00
PcA: Pep	 85 	 Somewhat limited Seepage	 0.70	 Somewhat limited Piping	 0.16	 Very limited Depth to water	1.00
PcB: Pep	 85 	 Somewhat limited Seepage 	 0.70 	 Somewhat limited Piping 	 0.17 	 Very limited Depth to water 	 1.00

Table 15.--Ponds and Embankments--Continued

Map symbol and soil name	 Pct. of map unit	 	eas	 Embankments, dikes 	, and	 Aquifer-fed excavated pond 	S
	 	 Rating class and limiting features		 Rating class and limiting features		 Rating class and limiting features	Value
PeA:	 						————
Pep	85 			Somewhat limited Piping		Very limited Depth to water	1.00
PeB:		 	i	 	i	 	1
Pep	90			Somewhat limited Piping	0.86	Very limited Depth to water	1.00
PMG:		 		 		 	
Potter	45 	Very limited Slope 				Very limited Depth to water 	1.00
	į	Seepage	0.72	•	į	İ	į
Mobeetie	 35 		•	 Somewhat limited Seepage 		 Very limited Depth to water 	1.00
PoA: Portales	 90 					 Very limited Depth to water	1.00
PsA: Posey	 85 					 Very limited Depth to water	1.00
PsB: Posey	 90 					 Very limited Depth to water	1.00
PsC: Posey	 90 	Seepage	 0.72 0.68	 Somewhat limited Piping 		 Very limited Depth to water 	1.00
RaA: Randall	 90 	 Not limited 	 	 Very limited Ponding Depth to saturated zone Hard to pack		 Very limited Slow refill Cutbanks cave 	 1.00 0.10
RcA: Ranco	 90 	 Not limited 	 	 Very limited Ponding Depth to saturated zone Hard to pack	 1.00 1.00 0.95	•	 1.00 0.10
SaA: Slaughter	 85 	Depth to cemented pan		 Very limited Thin layer Piping	 1.00 0.12	 Very limited Depth to water 	1.00
SnC: Spantara	 85 	 Very limited Seepage 	 1.00	 Somewhat limited Seepage 	 0.07	 Very limited Depth to water 	 1.00

Table 15.--Ponds and Embankments--Continued

Map symbol and soil name	Pct. of map unit	Pond reservoir areas 		Embankments, dikes levees 	s, and	Aquifer-fed excavated ponds		
		Rating class and limiting features	Value	Rating class and limiting features	•	 Rating class and limiting features	Value	
SpA: Sparenberg			- ———— 	 Very limited Ponding Hard to pack	 1.00 0.85		 1.00	
SsA: Sparks	- 85 	 Somewhat limited Seepage	0.04	 Somewhat limited Piping	0.12	 Very limited Depth to water 	1.00	
W: Water	- 100	 Not rated 		 Not rated 		 Not rated 		

Table 16.--Engineering Index Properties

(Absence of an entry indicates that the data were not estimated.)

Map symbol	Depth	USDA texture	Classi	fication	Fragr	nents		rcentage sieve n			 Liquid	 Plas-
and soil name	•		Unified	 AASHTO	>10 inches	3-10 inches	4	10	40	200	limit	
10:	In	 	- I 	_ 	Pct	 Pct 	 	 	 	 	Pct	
Regnier	3-12	 Clay loam, sandy clay loam, gravelly sandy clay loam	CL CL, GC, SC	A-6 A-6 	0 0 		80-100 65-100 					
	12-60	Bedrock			 	 		 	 	 		
Rock outcrop	0-60	Bedrock	Ì	į	j		j		 	j	j	j
Lacoca		Loam Bedrock	SC-SM, SM	A-2-4, A-4	0-2	0-5	90-100	90-98	70-90 	30-50	15-25	NP-7
11: Tucumcari	5-19 19-49	 Clay loam Clay loam Clay loam Clay loam, sandy clay loam, clay	 CL CL CL	 A-6 A-6, A-7 A-6, A-7 A-6, A-7		0 0 0 0	 100 100 100 100	100 100	85-100 85-100	65-85 65-80	 35-40 38-52 35-45 35-50	19-29 15-22
Hassell 	4-22	 Clay loam Silty clay loam, clay, silty clay Silty clay loam, clay,	 CH, CL CH, CL CH, CL	 A-7 A-7 A-7	 0 0 	0 0 0	 100 100 100	100 	90-100 	75-95 	 41-53 45-61 45-61	25-37
		silty clay Bedrock		İ	i 		i 	 	 	 	 	
13: Tucumcari	5-19 19-49	 Loam Clay loam Clay loam Clay loam, sandy clay loam, clay	 CL CL CL	 A-6 A-6, A-7 A-6, A-7 A-6, A-7		0 0 0 0	 100 100 100 100	100 100	85-100 85-100	65-85 65-80	 25-35 38-52 35-45 35-50	19-29 15-22
Redona		 Loam Sandy clay loam, clay loam, loam	CL-ML, CL	 A-4 A-6 	 0 0	0	 100 100		 85-100 80-100 	•	25-30 29-47	5-10 12-25
	23-60	Sandy clay loam, clay loam, loam	CL, SC	A-6 	0	0	100	 100 	80-100 	35-55 	29-46	12-25

Table 16.--Engineering Index Properties--Continued

Map symbol	Depth	 USDA texture	Classif	ication	Fragr	ments		rcentage sieve n			 Liquid	 Plas-
and soil name			 Unified	 AASHTO	>10 inches	3-10 inches	 4	10	40	200	limit 	ticity index
	In	 	.	 	 Pct	 Pct	 	 		 	 Pct	
28: Lacoca		 Cobbly fine sandy loam Bedrock 	 SC, SC-SM, SM 	 A-2, A-4 	 0 	 15-25 	 75-95 	 70-90 	 60-80 	 20-40 	 15-25 	 NP-10
San Jon	6-33	Loam, clay loam, silty clay loam	 ML, CL-ML, CL CL	 A-4 A-6 	 0 0		 85-100 80-95 			55-80 		
	33-60	Bedrock 		 	 	 	 	 	 	 	 	
Rock outcrop	0-60	Bedrock										
31: Chispa	7-43	 - Fine sandy loam Sandy clay loam, clay loam, loam Sandy loam, sandy clay	CL	 A-4 A-6, A-7 A-4, A-6	 0 0 0	0 	 90-100 90-100 85-100	 85-100 	75-90 	50-70 	30-45 	 11-25
	43-00	l loam, loam	SC, SC-SM			0-3						4-13
Redona		Sandy clay loam, clay		 A-2, A-4 A-6, A-4 	 0 0	 0 0	 100 100 				 20-25 25-35 	•
32:		 		 	 	 	! 	 	 	! 	 	!
Regnier		Clay loam, sandy clay loam, gravelly sandy	•	A-6 A-6 	0 0 		80-100 75-100 					
	12-60	clay loam Bedrock		 	 	 	 	 	 	 	 	
Lacoca		 Sandy loam Bedrock	 SC-SM, SM 	 A-2-4, A-4 	 0 	 0-5 	 90-100 	 90-98 	 70-90 	 25-45 	 15-25 	 NP-7
Rock outcrop	0-60	 Bedrock		 	 	 	 	 	 	 	 	
36: Alama	3-28	Silty clay loam, clay loam, silt loam	CL	 A-6 A-6 	 0 0 0	 0 0	 100 100 100	100 	95-100 	75-95 	 	10-20
		loam	 	 	 	 	 	 		 	 	

Table 16Engine	ering Index	Properties	Continued
----------------	-------------	------------	-----------

Map symbol	Depth	 USDA texture	Classif 	ication	Fragi	ments		rcentage sieve n			 Liquid	 Plas-
and soil name		 	 Unified	 AASHTO	>10 inches	3-10 inches	 4	10	40		limit 	ticity index
27.	In				Pct	Pct	 	 		 	Pct	
37: Ima		 Fine sandy loam Fine sandy loam, sandy loam 		 A-2, A-4 A-2, A-4 	 0 0			 85-100 85-100 				
Gallen	0-5 5-20	 Gravelly sandy loam Extremely gravelly loam, very gravelly loam, very gravelly sandy loam		 A-2 A-1, A-2 				 55-75 5-50 				
	20-60	Very gravelly sand, very	GP-GM, GP, SM, SP	 A-1 	0	 10-25 	20-60 	5-50 	5-25	0-15 	 1-5 	NP
58: Redona		Sandy clay loam, clay	 CL-ML, CL SC-SM, CL-ML, CL, SC		0 0	 0 0	 100 100		 85-100 80-100			 5-10 5-15
Armesa		 Sandy clay loam Sandy clay loam, loam, very fine sandy loam		 A-4 A-4 	0 0	 0 0		 95-100 95-100 				 5-10 5-10
60:						 		 				
Chispa		· ·		A-4 A-6, A-7	0 0			85-100 85-100				
	32-60	Sandy loam, sandy clay	CL, CL-ML, SC, SC-SM	A-4, A-6 	0	0-5 	85-100	80-100	50-90	 36-60 	20-35 	5-15
Armesa 	0-10 10-60		 SM CL-ML, SC-SM, SC	 A-2, A-4 A-4 	 0 0	 0 0		 95-100 95-100 				
Redona 		Sandy clay loam, clay		 A-2, A-4 A-4, A-6 	 0 0	 0 0 	 100 100 				 20-25 25-35 	

Table 16Engineering	Index	PropertiesContinued
---------------------	-------	---------------------

Map symbol	Depth	USDA texture	Classif	ication	Fragr	nents		Percentage passing sieve number			 Liquid	 Plas-
and soil name			 Unified	 AASHTO	>10 inches	3-10 inches	 4	10	40	200	limit	ticity index
61:	In	 	- 		 Pct 	 Pct 	 	 	 	!	Pct	
Berwolf		 Loamy fine sand Fine sandy loam, sandy loam	SM SM	A-2 A-2	0 0	 0 0	 100 100		 75-90 65-80		1-5 20-25	 NP NP-5
	42-60	Fine sandy loam, loamy fine sand	SM	A-2, A-4 	0	0	 100 	100 	 75-90 	20-40	15-25	 NP-5
Roswell		 Fine sand Fine sand, loamy fine sand 	SM SM 	 A-2 A-2 	0 0	 0 0 	•	95-100 95-100 	•	•	•	 NP NP
AcA:		i I	İ	i I	j I	 	 	 	 	j I	i i	į I
Acuff		 Loam Sandy clay loam, clay loam	CL, CL-ML	A-4 A-6	i 0 0	0 0	100 100				25-30 30-35	
	16-33	Sandy clay loam, clay	CL	 A-6	0	0	100	100	 95-100 	50-75	30-35	10-15
	33-80	Clay loam, loam	CL, CL-ML	A-4, A-6	0	0	100	100	 90-100	60-75	25-35	5-15
AcB: Acuff		 Loam Sandy clay loam, clay	 CL, CL-ML CL	 A-4 A-6	0 0	 0 0	 100 100		 95-100 95-100		 25-30 30-35	 5-10 10-15
	33-80	loam Clay loam, loam	 CL, CL-ML	 A-4, A-6	0	 0	 100	 100	 90-100	 60-75	 25-35	 5-15
AfA: Amarillo		Sandy clay loam, clay		 A-2-4, A-4 A-6	 0 0	 0 0	 100 100				 21-31 25-35	
	42-80	loam Loam, clay loam 	CL, CL-ML, SC, SC-SM	 A-4, A-6 	0	 0 	 90-100 	 90-100 	 65-95 	 35-70 	 15-25 	 5-15
AfB: Amarillo	0-10 10-35			 A-2-4, A-4 A-6	0 0	 0 0	 100 100				 20-25 25-35	
	35-80		SC-SM, SC, CL	 A-4, A-6 	0	 0 	 90-100 	 90-100 	 65-98 	36-70 	 29-44 	 9-25

Table	16En	gineering	Index	Properties	-Continued

Map symbol	 Depth	 USDA texture	Classif	ication	Fragments						 Liquid	 Plas-
and soil name		 	 Unified	 AASHTO	>10 inches	3-10 inches	 4	10	40	200	limit 	ticity index
	In				Pct	Pct	 			! !	Pct	
AnB: Amarillo			1 -	 A-2-4 A-6 	 0 0	 0 0	 100 100 				 15-20 25-35 	
	37-80 	Loam, clay loam 	CL, CL-ML, SC, SC-SM	A-4, A-6 	0 	0 	90-100	90-100 	65-95 	35-70 	15-25 	5-15
AvA: Arvana				 A-2-4, A-4 A-4, A-6	 0 0	 0 0	 100 100		 70-90 80-95			 2-7 7-15
		Sandy clay loam		A-4, A-6	0	0	100	100	80-95			5-12
		Cemented material Clay loam 	 CL, CL-ML, SC, SC-SM 	 A-4, A-6 	 0 	 0 	 100 	 100 	 80-98 	 36-65 	 20-40 	 5-22
BcA: Bippus	13-23 	 Clay loam Clay loam, loam, sandy clay loam Clay loam	 CL SC-SM, SC, CL CL	 A-6 A-4, A-6 A-6	 0 0 0	 0 0 0	100 	95-100 	85-98 	36-75 	 30-40 22-40 30-40	7-20
DRC: Drake	7-28 28-55	Fine sandy loam, sandy clay loam, loam, clay loam Fine sandy loam, sandy clay loam, loam, clay loam	SC, CL SC, CL 	 A-6, A-4 A-4, A-6, A-7 A-4, A-6, A-7 A-4, A-6, A-7	 0 	0 0 	98-100 98-100 	 96-100 96-100 96-100 96-100	85-98 85-98 	36-75 36-75 	25-45 25-45 	 5-14 9-21 9-21 9-21 9-21
EsA: Estacado			 CL CL 	 A-6 A-6 	 0 0 0	j 0	95-100	95-100	80-100	51-80	 25-35 30-38 30-38	10-15

Map symbol	 Depth	 USDA texture	Classif	ication	Fragi	ments Percentage passing sieve number					 Liquid	 Plas-
and soil name			 Unified	 AASHTO	>10 inches	3-10 inches		10	40	200	limit 	ticity index
	In		·		Pct	 Pct	 	! !	 	 !	Pct	
EsB: Estacado			 CL	 A-6	0				 80-100			
	22-30	Clay loam Clay loam	CL CL	A-6 A-6	0	0	95-100	95-100	80-100 80-100	60-90	30-38	10-15
	30-80 	Clay loam 	CL 	A-6 	0	0 	90-100 	90-100 	80-100 	60-90 	30-38 	10-15
FrA: Friona		 Loam		 A-4, A-6	0	 0	 100	•	 90-100	•	•	•
		Clay loam Clay loam, sandy clay		A-6, A-7-6 A-6, A-7-6	0	0 0			75-95 90-100			
		loam Cemented material		 	 	 	 	 	 	 	 	
	41-80 	Sandy clay loam, clay loam, loam	CL	A-6, A-7-6 	0	0 	85-100 	75-100 	65-90 	55-75 !	30-45 	12-25
GoB:	 	 Loamy fine sand	 -	 A-2-4	 0	 0	 	 	 80-95	 15 25	 16 26	
Gomez	12-20	Fine sandy loam	CL, CL-ML	A-4, A-6	0	0	90-100	85-100	75-95	55-75	20-35	1-7 6-16
		Fine sandy loam, loam 	CL-ML, SC, SC-SM, CL	A-4 	0 			ĺ	75-95 		ĺ	6-13
		Fine sandy loam, loamy fine sand	CL-ML, CL 	A-4 	0 			ĺ	75-95 	ĺ	ĺ	2-13
	47-80 	Loamy fine sand 	SM 	A-2-4 	0 	0 	95-100 	95-100 	80-95 	15-35 	15-24 	1-7
GrA: Grier		 Clay loam		 A-6, A-7	 0	 0	 100		 85-100		•	•
		Clay loam Sandy clay loam	•	A-6 A-4, A-6	0 0	0 0	100 100	•	90-100 80-95	•	•	•
		Clay loam	CL	A-6	0	0	100		75-100			
KmB: Kimberson	0-5	 Gravelly loam		 A-4, A-2-4	0	0-5	 70-90	 50-70	 35-60	 30-55	 25-35	5-10
	 5-14 	 Gravelly loam 	GC, GC-GM CL-ML, GC-GM, SC-SM, SC	 A-2-4, A-4 	0	 0-15 	 65-90 	 60-85 	 40-60 	 30-55 	 25-30 	5-10
		Cemented material Gravelly loam 	CL-ML, GC-GM, SC-SM, SC	 A-2-4, A-4 	 0-5 	 0-15 	 65-90 	 60-85 	 40-60 	 30-55 	 25-30 	 5-10
LcA: Lazbuddie			' '	 A-7-6	 0	 0	 100	•	 90-100		•	•
	10-45 45-80	. ,	1 - , -	A-7-6 A-7-6	0 0	0 0	100 100	100 100	90-100 90-100	•	•	•

Table 16Engineering	Index	Propert	ies(Continued
---------------------	-------	---------	------	-----------

Map symbol	 Depth	 USDA texture	Classi	fication	Fragi	nents	Percentage passing sieve number				 Liquid	 Plas-
and soil name	 -]	 Unified	 AASHTO	>10 inches	3-10 inches	4	10	40	200	limit	ticity index
	 In		- I	-	- Pct	 Pct		l	 	 	 Pct	
LoA:	j	İ	j	İ	j	İ	İ	į	İ	İ	İ	İ
Lofton		Clay loam	CL	A-6, A-7-6	0	0	100				35-45	
		Silty clay	CH, CL	A-7-6	0	0	100				40-55	
	25-80	Clay loam	CL	A-6	0	0	100	95-100	80-100	60-80	30-40	15-25
McA:	 	}				 	1	 		 	1	
McLean	0-6	Clay	СН	A-7-6	i 0	i 0	100	100	95-100	85-98	60-76	40-50
		Clay, silty clay	CH	A-7-6	i o	i o	100				60-76	
		Clay, silty clay	CH	A-7-6	i o	I 0	100	98-100	90-100	80-95	60-76	40-50
		Clay, silty clay	CH	A-7-6	j o	į o	100	98-100	90-100	80-95	60-76	40-50
MsD:	 	1					ļ					
Milsand	I I 0-6	Loamy fine sand, loamy	 SP-SM, SM,	 A-2-4	0	l l 0-2	90-100	 90_100	 75-95	 10-30	 16-28	l l 2-9
misana	0 0 	sand, fine sand	SC-SM		0	1 0 2	1 100	30 100 	1 3 33	1	1	1 2 3
	6-30	Loamy fine sand, loamy	SP-SM, SM,	A-2-4	i 0	0-2	90-100	75-90	60-85	10-30	16-27	2-9
		sand, fine sand	SC-SM	i	i	i -					i	i
	30-80	Fine sand, loamy fine	SP-SM, SM,	A-2-4	i 0	0-2	90-100	75–90	60-85	10-30	0-24	NP-7
	į	sand, loamy sand	SC-SM	į	į	į	į	į	j	į	j	į
MsE:	 -					 -				 		
Milsand	I I 0-8	 Fine sand	SC-SM, SM,	I IA-2-4	0	l l 0	100	100	 75-95	 10-30	0-10	I I N P = 5
Mi i saliu	U-0 	The same	SP-SM	A-2-4 	1	U	1 100	1 100	1 3 - 3 3 	10-30	1 0-10	
	ı I 8–30	 Fine sand	ISC-SM, SM	A-2-4	i 0	i 0	100	100	 75-95	 10-30	0-10	I INP-5
		Fine sand	ISM, SC-SM	IA-2-4	0	i 0	100		75-95		0-10	
		Fine sand	SC-SM, SM,	A-2-4	i 0	i 0	100		75-95			
	İ	İ	SP-SM	į	į	İ	į	i	į	į	į	į
Arch		 Fine sandy loam	 SM, SC-SM	 A-4	 0	 0	 100	100	 		 20-25	 ND E
AI CII		Sandy clay loam	CL-ML, CL	A-4 A-4	1 0	0 0		95-100				NP-3 5-10
		Sandy Clay Toam Sandy clay loam	SC, CL	IA-4	1 0	l 0	100				25-35	
		Sandy Clay Toam Sandy clay loam	CL	A-6	0						25-35	
		į – i	İ	į	İ	ĺ	İ	İ	ļ	İ	İ	ĺ
NtC:		 Final and					1 100	100				
Nutivoli		Fine sand Fine sand	SM SM	A-2-4 A-2-4	0 0	0 0	100 100		75-85		0-5	NP NP
	ן ט-80 	Fine Sano	SIM 	A-2-4 	U	l U	 T00	100	75-85 	20-35 	0-5 	I NP
NtD:	 	i		i		<u> </u>	i	i	i	<u> </u>	i	<u> </u>
Nutivoli	0-28	Fine sand	SM	A-2-4	j 0	j 0	100	100	75-85	15-30	0-5	NP
		Fine sand	SM	A-2-4	0	0	100		75-85		0-5	NP
				1	1	I	1		I	I		I

Table 16Engine	ering Index	Properties	Continued
----------------	-------------	------------	-----------

Map symbol	Depth	Depth USDA texture _		ication	Fragr						 Liquid	 Plas-
and soil name			 Unified	 AASHTO	>10 inches	3-10 inches	4	10	40	200	limit 	ticity index
OcA:	In	 	-	- 	 Pct 	 Pct 		 	 	 	 Pct 	
01ton	6-17	Clay loam Clay loam, clay	CL CL	A-6 A-6	0	0		95-100	90-100		35-45	20-30
		Clay loam Clay loam	CL CL	A-6 A-6	0 0	0 0	100 100	100 95-100		60-90 60-90		
OcB: 01ton	0-9	 Clay loam	 CL	 A-6	0	 0	100	 100	 85-100	 55-85	 25-35	 10-15
	9-25	Clay, clay loam	CL	A-6	j 0	0	100	95-100				
		Clay loam	CL	A-6	0	0	100			60-90		
	34-80	Clay loam 	CL 	A-6 	0 	0 	100	95-100 	80-100 	60-90 	30-40 	10-20
PcA:	0.10						100					
Pep		Clay loam Clay loam, loam, sandy clay loam	CL CL	A-6 A-6	0 0	0 0		95-100 95-100				
	16-32	Clay loam, sandy clay loam, loam	CL	A-6	0	0	100	95-100	 90-100 	 60-80 	 26-48 	8-25
	32-80	Clay loam, sandy clay loam, loam	CL	A-4, A-6	0	0	100	95-100	90-100 	60-70 	26-48	8-25
PcB:		 				 			 	 		
Pep		Clay loam	CL	A-6	0	0		95-100				
		Clay loam, loam, sandy clay loam	CL 	A-6 	0	0		95-100 	j	į	į	j
		Clay loam, sandy clay loam, loam	CL 	A-6 	0 	0 		95 -1 00 		ĺ	İ	ĺ
	31-80	Clay loam, sandy clay loam, loam	CL 	A-4, A-6 	0	0	100	95-100 	90-100 	60-70 	26-48 	8-25
PeA:							100		 			
Pep		Loam Clay loam	CL-ML, CL	A-4 A-6	0 0	0 0		95-100 95-100				
		Clay loam	CL CL	A-6 A-6	0	0		95-100				
DoD.									 	 	 	
PeB: Pep	0-14		 CL-ML, CL	 A-4	0			95-100				
		Loam, clay loam Clay loam	CL CL	A-6, A-4 A-6	0 0	0 0		95-100 95-100	•	•		•

Table 16Engineering	Index	Properti	iesC	Continued
---------------------	-------	----------	------	-----------

Map symbol	 Depth	 USDA texture	Classif	ication	Fragi				e passi umber		 Liquid	 Plas-
and soil name		 	 Unified	 AASHTO		3-10 inches	 4	10	40	200	limit 	ticity index
PMG:	 In 	 	 	 	Pct 	 Pct 					 Pct 	
Potter	0-4 4-9		CL-ML, CL CL-ML, SC-SM, CL, SC	A-4 A-4, A-6 	0 0			90-95 70-85 				
	9-80	Extremely cobbly loam		A-2-4, A-4	5-10	 40-50	50-60	 45-55 	 35-45	30-40	20-30	5-10
Mobeetie		Fine sandy loam Fine sandy loam, sandy loam		 A-4 A-2-4, A-4 	0 0			 90-100 90-100				
	16-80	Fine sandy loam, sandy loam		 A-2-4, A-4 	0	 0-5 	 90-100 	 85-100 	 70-90 	 25-55 	20-27 	5-10
PoA:				ļ.,								
Portales	15-35	Loam Clay loam Loam, clay loam	CL	A-4 A-6 A-6	0 0 0	0 0 0	100	95-100 95-100 95-100	90-100	70-80	35-40	15-20
PsA:		 	I I	 		 	[[[[
Posey	0-11	Fine sandy loam	CL-ML, SC-SM,	A-2-4, A-4	0	0	98-100	95-100	65-85	30-55	17-25	5-10
	11-17	Sandy clay loam, clay		A-4, A-6	0	0	98-100	98-100	90-100	 55-75	25-35	5-15
	17-42	Sandy clay loam, loam, clay loam	CL, SC	 A-6	0	0	95-100	90-100	 75-90	 40-65	25-40	10-20
	42-80	Sandy clay loam, clay loam	CL	 A-6 	0	 0 	 90-100 	 85-100 	 85-100 	 50-70 	 25-40 	 10-20
PsB:							 					
Posey	0-6 	Fine sandy loam	CL-ML, SC-SM, CL, SC	ĺ	0 	0 	 98-100	95-100 	65-85 	30-55 	17-25 	2-10
	6-13	Sandy clay loam, clay	CL, CL-ML	A-4, A-6 	0	0	98-100 	98-100	90-100	55-75 	25-35 	5-15
	13-52	Sandy clay loam, loam, clay loam	CL, SC	A-6 	j 0	i 0 I	95-100	90-100	75-90 	40-65 	 25-40 	 10-20
	52-80		CL 	 A-6 	0	 0 	 90-100 	 85-100 	 85-100 	 50-70 	 25-40 	 10-20
	İ		İ	İ	i	İ	İ	İ	İ	İ	İ	i

Table 16Engineering	Index	Propert	iesContinue	t
---------------------	-------	---------	-------------	---

Map symbol	 Depth	 USDA texture	Classif	ication	Fragments		•				 Liquid	•
and soil name		 	 Unified	 AASHTO	>10 inches	3-10 inches	 4	10	40	200	limit 	ticity index
	In				Pct	Pct	 	 			Pct	
PsC: Posey	 0-12 	 Fine sandy loam 	 CL-ML, SC-SM, CL, SC	 A-2-4, A-4 	 0 	 0 	 98-100 	 95-100 	 65-85 	 30-55 	 17-25 	 5-10
	12-22	Sandy clay loam, clay loam		A-4, A-6	0	0	98-100	98-100	90-100	 55-75	25-35	5-15
	22-38		CL, SC	 A-6 	 0 	 0 	 95-100 	 90-100 	 75-90 	 40-65 	25-40	 10-20
	38-80	Sandy clay loam, clay loam	CL	 A-6 	0	0	90-100	85-100	85-100	50-70	25-40	10-20
RaA:		 		 	 	 	 	 	 	 		
Randall	0-17 17-28			A-7-6 A-7-6	0 0						56-66 56-66	
	28-80			A-7-6	0						56-66	
RcA:				 	 	 	 	 	 	 	 	
Ranco				A-7-6	0	0	100				56-66	
		Clay, silty clay Clay, silty clay		A-7-6 A-7-6	0 0	0 0	100 100				56-66 56-66	
SaA:		 		 	 	 	 	 	 	 		
Slaughter				A-6	0	0	100				28-35	
		Clay loam Cemented material		A-6, A-7-6 A-1-a	0 	0 	•	 95-100	 95-100	•	35-45 	15-25
		Sandy clay loam	•	A-6	0	0			ı	1	30-38	10-15
SnC:	 			 	 	 	 	 	 	 	 	
Spantara				A-2-4	0	0					15-25	
	10-45 	Fine sandy loam, sandy	CL, CL-ML, SC, SC-SM	A-2-4, A-4 	0 	0 	100 	 82-100	70-98 	25-55 	20-30	 2-10
	45-80	Fine sandy loam, sandy loam, loamy fine sand		 A-2-4, A-4 	i 0	0	100	95-100	70-98 	25-55	20-30	5-10
SpA:		 		 	 	 	 	 	 	 		
Sparenberg		Clay Clay, silty clay	' '	A-7-6 A-7-6	0 0	0 0	100 100		•	•	46-66 46-66	•
		Clay, silty clay Clay, silty clay		A-7-6 A-7-6	0 0	0 0			•	•	46-66 46-66	•
		Clay, silty clay	' '	A-7-6	0	0			•	•	46-66	•
		i i		İ	İ	ĺ	İ	ĺ	ĺ	ĺ	i i	ĺ

Table 16.--Engineering Index Properties--Continued

Map symbol	 Depth	USDA texture	Classi	fication	Fragr	Fragments 		Percentage passing sieve number				 Liquid Plas-		
and soil name		İ	İ		>10	3-10					limit	ticity		
			Unified	AASHTO	inches	inches	4	10	40	200	1	index		
				_				-	ļ		ļ	.		
	In				Pct	Pct		!	!	ļ.	Pct	!		
SsA:								1						
Sparks	0-6	Loam	CL	A-6	0	0	100	100	85-100	60-75	25-35	10-15		
	6-18	Clay, clay loam	CH, CL	A-7-6	0	0	100	100	90-100	70-90	40-55	15-25		
	18-80	Clay loam	CL	A-6	0	0	100	95-100	90-95	60-75	35-40	15-20		
				1	I							1		
W:					I			1				1		
Water														
					I									
												<u> </u>		

Table 17.--Physical Properties of the Soils

(Entries under "Erosion factors--T" apply to the entire profile. Entries under "Wind erodibility group" and "Wind erodibility index" apply only to the surface layer. Absence of an entry indicates that data were not estimated.)

Map symbol	 Depth	Particle size	 Moist	Permea-	 Available	 	 Organic	Erosi	on fac	tors		nd bility
and soil name	Depth 	Clay	bulk density	bility (K-sat)		extensi-	matter	 Kw	 Kf	 T	 group	 index
10	 In	Pct	g/cc	In/hr	In/in	Pct	Pct			 	 	
10: Regnier	0-3 3-12 12-60		 1.40-1.50 1.45-1.55 		 0.16-0.18 0.14-0.16 		0.5-1.0 0.1-0.5	.37 .32 	 .43 .32 	 2 	 4L 	 86
Rock outcrop	 0-60					 	 		 	 	 	
Lacoca	 0-8 8-60	 5-18 	1.30-1.50	0.6-2 0.00-0.2	0.10-0.15	 0.0-2.9 	0.5-1.0	.24	 .28 	 1 	 4L 	 86
11:	 	 				 	 		 	 	 	
Tucumcari	0-5 5-19 19-49 49-60	28-40 35-45	1.30-1.40 1.40-1.50 1.45-1.55 1.45-1.55	0.2-0.6 0.2-0.6	0.19-0.21 0.19-0.22 0.19-0.22 0.19-0.21	3.0-5.9 3.0-5.9	1.0-2.0 0.5-1.2 0.1-0.8 0.1-0.8	.32 .32 .32 .32	.32 .32 .32 .32	5 	4L 	86
Hassell	0-4 4-22 22-32 32-60	35-50	 1.20-1.30 1.40-1.50 1.40-1.50 	0.06-0.2	 0.19-0.21 0.16-0.20 0.16-0.20 	6.0-8.9	1.0-2.0 0.1-0.7 0.0-0.5	.32 .37 .37 .37	 .32 .37 .37 	 3 	 4 	 86
13:	 	 				 	 	 	 	 	 	
Tucumcari	0-5 5-19 19-49 49-60	28-40 35-45	1.30-1.40 1.40-1.50 1.45-1.55 1.45-1.55	0.2-0.6 0.2-0.6	0.16-0.19 0.19-0.22 0.19-0.22 0.19-0.21	3.0-5.9	1.0-2.0 0.5-1.2 0.1-0.8 0.1-0.8	.37 .32 .32 .32	.37 .32 .32 .32	5 	4L 	86
Redona	 0-4 4-23 23-60	18-35	 1.30-1.40 1.35-1.45 1.40-1.50	0.6-2	 0.15-0.17 0.17-0.19 0.16-0.18	3.0-5.9	 1.0-2.0 0.1-1.0 0.0-0.6	 .37 .32 .37	 .37 .32 .37	 5 	 5 	 56
28: Lacoca	 0-12 12-60	 5-18 	 1.40-1.55 	0.6-2	0.10-0.12	 0.0-2.9 	 0.5-0.9 	 .15 	.28 	 1 	 5 	 56
San Jon	0-4 6-35 35-60		 1.40-1.50 1.40-1.50 		0.14-0.16 0.13-0.15 	•	0.5-0.9 0.1-0.5	.37 .37 	.37 .37 	 3 	 4L 	 86
Rock outcrop	 0-60	 	 	0.00-0.2		 	 		 	 	 	

Map symbol	 Depth	Particle size	 Moist	Permea-	 Available	 linear	 Organic	Erosi	on fac	tors		nd bility
and soil name		Clay	bulk density	bility (K-sat)		extensi-	matter	Kw	 Kf	 T	 group	 index
	In	Pct	g/cc	In/hr	In/in	Pct	Pct	ļ		ļ ——		
31: Chispa	 0-7 7-43 43-60	25-35	 1.35-1.55 1.35-1.50 1.35-1.50	0.6-2	 0.10-0.15 0.12-0.18 0.08-0.15	0.0-2.9	 1.0-2.0 0.5-1.0 0.1-0.4	.28 .32 .32	 .28 .32 .37	 5 	 3 	 86
Redona	 0-8 8-60		1.35-1.45 1.40-1.50		0.12-0.14	•	1.0-2.0	.28	.28 .32	 5 	 3 	86
32: Regnier	 0-8 8-12 12-60		 1.40-1.50 1.45-1.55 		 0.16-0.18 0.14-0.16 		 0.5-1.0 0.1-0.5 	.37	 .43 .32 	 2 	 4L 	 86
Lacoca	 0-5 5-60	5-18 	 1.35-1.55 	0.6-2	0.10-0.15	 0.0-2.9 	0.5-1.0	.20	.20	 1 	 3 	 86
Rock outcrop	 0-60		 			 	 		 	 	 	
36: Alama	 0-3 3-28 28-60	18-35	 1.20-1.30 1.40-1.50 1.40-1.50	0.2-0.6	 0.17-0.20 0.19-0.21 0.17-0.20	3.0-5.9	 1.0-2.0 0.5-1.0 0.1-0.5	 .43 .37 .37	 .43 .37 .37	 5 	 4L 	 86
37: Ima	 0-10 10-60	•	 		 0.11-0.15 0.11-0.15	•	 1.0-2.0 0.0-0.5	.28	 .28 .32	 5 	 3 	 86
Gallen	 0-5 5-20 20-60	10-18	 1.35-1.45 1.40-1.50 1.40-1.50	2-6	 0.09-0.11 0.06-0.08 0.04-0.06	0.0-2.9	 1.0-2.0 0.5-1.0 0.1-0.5	.15	 .28 .37 .17	 2 	 4 	 86
58: Redona	 0-6 6-60		 1.30-1.40 1.40-1.50		 0.15-0.17 0.17-0.19		 1.0-2.0 0.5-1.0	.32	 .32 .32	 5 	 5 	 56
Armesa	 0-2 2-60	•	 1.30-1.40 1.45-1.55		 0.14-0.16 0.14-0.16	•	1.0-3.0	.32	 .32 .43	 5 	 4L 	 86

Table 17.--Physical Properties of the Soils--Continued

Map symbol	 Depth	Particle size		Permea-	 Available	 linear	 Organic	Erosi	on fact	tors		nd bility
and soil name	Depth 	Clay	bulk density	bility (K-sat)		extensi-	matter	 Kw	 Kf	 T	 group	 index
	In	Pct	g/cc	In/hr	In/in	Pct	Pct		ļ		 	!
60: Chispa	 0-7 7-32 32-60	25-35	 1.35-1.55 1.35-1.50 1.35-1.50	0.6-2	 0.10-0.15 0.12-0.18 0.08-0.15	0.0-2.9	 1.0-2.0 0.5-1.0 0.1-0.5	 .28 .32 .32	 .28 .37 .37	5	 3 	 86
Armesa	 0-10 10-60 		 1.35-1.45 1.45-1.55 	2-6 0.6-2	 0.13-0.16 0.14-0.16		 1.0-3.0 0.1-1.0	 .28 .37 	 .28 .37 	5 5	 3 	 86
Redona	 0-6 6-60		 1.35-1.45 1.40-1.50	2-6 0.6-2	 0.12-0.14 0.17-0.19		 1.0-2.0 0.5-1.0	.28	 .28 .32	5	 3 	 86
61: Berwolf	 0-11 11-42 42-60	10-18	 1.30-1.40 1.45-1.55 1.45-1.55	2-6 2-6 2-6	 0.09-0.10 0.12-0.14 0.13-0.15	0.0-2.9	0.9-2.0 0.5-1.0 0.1-0.5	 .20 .28 .28	 .20 .28 .28	5	 2 	 134
Roswell	 0-8 8-60		 1.40-1.50 1.40-1.50	6-20 6-20	0.05-0.07		0.5-1.0 0.1-0.3	.17	 .17 .20	5	 1 	220
AcA: Acuff	 0-7 7-33 33-57 57-80	25-35 25-35	 1.30-1.55 1.40-1.65 1.40-1.65 1.40-1.65	0.6-2	 0.14-0.16 0.16-0.18 0.16-0.18 0.16-0.18	0.0-2.9		 .37 .32 .32 .32	 .37 .32 .32 .32	5	 6 	 48
AcB: Acuff	 0-7 7-33 33-80	25-35	 1.30-1.55 1.40-1.65 1.40-1.65	0.6-2	 0.14-0.16 0.16-0.18 0.16-0.18	0.0-2.9	 1.0-2.0 0.5-1.0 0.0-0.2	 .37 .32 .32	 .37 .32 .32	5	 6 	 48
AfA: Amarillo	 0-9 9-42 42-80	20-35	 1.35-1.55 1.30-1.60 1.35-1.55	2-6 0.6-2 0.6-2	 0.11-0.15 0.16-0.18 0.13-0.15	0.0-2.9	0.2-0.7	 .28 .32 .37	 .28 .32 .37	5	 3 	 86
AfB: Amarillo	 0-10 10-35 35-80	20-35	 1.35-1.55 1.30-1.60 1.40-1.65	0.6-2	 0.11-0.15 0.16-0.18 0.10-0.16	0.0-2.9	0.2-0.7	 .28 .32 .32	 .28 .32 .32	5	 3 	 86

Table 17.--Physical Properties of the Soils--Continued

Table 1/Physical	Properties	OΤ	tne	SoilsContinued

Map symbol	 Depth	Particle size	 Moist	Permea-	 Available	 	 Organic	Erosid	on fact	tors		nd bility
and soil name	Depth 	 Clay 	Morst bulk density	bility (K-sat)		extensi-	matter 	 Kw	 Kf	 T	 group 	 index
AnB:	 In	Pct	g/cc	In/hr	In/in	Pct	Pct			 		
Amarillo	 0-12 12-34 34-80	20-35	 1.40-1.60 1.30-1.60 1.35-1.55	2-6 0.6-2 0.6-2	0.08-0.10 0.16-0.18 0.13-0.15	0.0-2.9	0.5-1.0 0.2-0.7 0.1-0.3	.20 .32 .37	 .20 .32 .37	 5 	 2 	 134
AvA: Arvana	0-11 11-21 21-31 31-45 45-80	18-35 15-27 	 1.40-1.60 1.45-1.65 1.45-1.65 1.50-1.70	0.6-2 0.6-2	 0.13-0.15 0.16-0.18 0.14-0.16 0.12-0.16	0.0-2.9	0.5-1.0 0.0-0.2 0.0-0.2 0.0-0.0	.37 .32 .37 .37 	.32 .37 	 2 	 3 	 86
BcA: Bippus	0-13 13-23 23-80	20-35	 1.30-1.60 1.40-1.65 1.30-1.60	0.6-2 0.6-2 0.6-2	 0.18-0.20 0.12-0.20 0.18-0.20	1.5-4.0	 1.0-3.0 0.1-1.0 0.1-2.0	 .32 .32 .32	.32	 5 	 6 	 48
DRC: Drake	 0-5 5-14 14-34 34-80	10-27 25-45	 1.30-1.55 1.60-1.65 1.60-1.65 1.60-1.65	0.6-2 0.6-2 0.6-2 0.6-2	 0.07-0.16 0.10-0.16 0.10-0.16 0.10-0.16	1.0-3.0 1.0-3.0	 0.5-1.5 0.1-0.5 0.1-0.5 0.1-0.5	.28 .32 .32 .32		 4 	 4L 	 86
EsA: Estacado	 0-11 11-20 20-80	27-35	 1.30-1.45 1.35-1.50 1.35-1.60		 0.14-0.16 0.18-0.20 0.18-0.20	0.0-2.9	 1.0-3.0 1.0-3.0 0.5-1.0	 .37 .32 .32	.32	 5 	 	 86
EsB: Estacado	0-10 10-22 22-32 32-80	27-35 27-35	 1.30-1.45 1.35-1.50 1.35-1.55 1.35-1.60	0.6-2 0.6-2 0.6-2 0.6-2	 0.14-0.16 0.18-0.20 0.18-0.20 0.18-0.20	0.0-2.9 3.0-5.9	1.0-3.0 0.5-1.0 0.1-0.5 0.1-0.3			 5 	 4L 	 86
FrA: Friona	 0-8 8-17 17-31 31-35 35-80	27-35 20-35 	 1.25-1.50 1.40-1.60 1.40-1.60 1.50-1.70	0.6-2	 0.14-0.16 0.18-0.20 0.17-0.19 0.07-0.15	0.0-2.9	 1.0-3.0 0.2-1.0 0.1-0.5 0.0-0.5	 .37 .32 .32 .32	.32	 3 	 5 	 56

Table 17.--Physical Properties of the Soils--Continued

Map symbol	 Depth	Particle size	 Moist	 Permea-	 Available		Organic	Erosi	on fac	tors		nd bility
and soil name	Depth 	 Clay 	Morst bulk density	Permea- bility (K-sat)		extensi-	matter	 Kw	 Kf	 T	 group 	 index
	In	Pct	g/cc	In/hr	In/in	Pct	Pct		ļ		 	
GoB: Gomez	0-12 12-20 20-23 23-47 47-80	10-24 10-20 5-20	 1.30-1.50 1.45-1.65 1.35-1.55 1.45-1.65 1.30-1.50	2-6 2-6 2-6	0.08-0.10 0.14-0.16 0.13-0.16 0.08-0.15 0.08-0.10	0.0-2.9 0.0-2.9 0.0-2.9	0.5-1.0 0.1-0.5 0.1-0.5 0.1-0.5 0.0-0.2	.20 .37 .28 .24 .20	 .20 .37 .28 .24 .20	 5 	 2 	 134
GrA: Grier	 0-4 4-18 18-35 35-80	30-40 15-27	 1.00-1.20 1.25-1.40 1.45-1.65 1.30-1.55	0.06-0.2	 0.18-0.20 0.18-0.20 0.14-0.16 0.18-0.20	6.0-8.9 3.0-5.9	1.0-8.0 1.0-3.0 0.2-1.0 0.1-0.5	 .32 .32 .37 .32	 .32 .32 .37 .32	 5 	 4L 	 86
KmB: Kimberson	 0-5 5-14 14-20 20-80	15-25 	 1.35-1.45 1.40-1.50 1.40-1.50	0.6-2	 0.14-0.16 0.13-0.15 0.13-0.15	0.0-2.9 	1.0-2.0 0.0-0.5 0.0-0.2	.37 .20 .20	 .37 .20 .20	 1 	 4L 	 86
LcA: Lazbuddie	 0-10 10-45 45-80	40-60	 1.15-1.35 1.25-1.40 1.25-1.40	0.06-0.2	 0.14-0.15 0.14-0.15 0.14-0.15	6.0-8.9	0.5-2.0 0.5-1.0 0.1-0.5	 .20 .20 .20	 .20 .20 .20	 5 	 4 	 86
LoA: Lofton	 0-6 6-25 25-80	40-55	 1.20-1.40 1.25-1.45 1.30-1.50	0.06-0.2	 0.18-0.20 0.14-0.16 0.18-0.20	6.0-8.9	1.0-3.0 0.5-2.0 0.1-0.5	.32	 .32 .24 .32	 5 	 6 	 48
McA: McLean	 0-6 6-41 41-62 62-80	50-60 50-60	 1.20-1.40 1.25-1.40 1.30-1.45 1.30-1.45	0.00-0.06	 0.12-0.18 0.12-0.18 0.11-0.15 0.11-0.15	9.0-25.0 9.0-25.0	0.5-2.0 0.1-0.5	.20 .20 .20 .20	 .20 .20 .20 .20	 5 	 7 	 38
MsD: Milsand	 0-6 6-30 30-80	5-15	 1.50-1.65 1.50-1.70 1.50-1.70	6-20	 0.04-0.08 0.02-0.08 0.02-0.08	0.0-2.9	0.1-1.0 0.1-0.5 0.1-0.5	 .15 .15 .15	 .15 .15 .15	 5 	 2 	 134

Table 17.--Physical Properties of the Soils--Continued

Map symbol	 Depth	Particle size	 Moist	Permea-	 Available		 Organic	Erosi	on fact	tors		nd bility
and soil name	Deptil 	Clay	bulk density	bility (K-sat)	•	extensi-	matter	Kw	 Kf	 T	 group 	 index
M-F.	 In	Pct	g/cc	In/hr	In/in	Pct	Pct	-	 		 	
MsE: Milsand	0-8 8-30 30-37 37-80	2-6 2-6	 1.50-1.65 1.50-1.65 1.55-1.75 1.50-1.70	6-20 6-20 6-20 6-20	0.02-0.06 0.02-0.06 0.02-0.06 0.02-0.08	0.0-2.9	0.1-0.3 0.1-0.3 0.1-0.3 0.1-0.3	.10 .10 .10 .10	 .10 .10 .10 .10	 5 	 1 	 220
Arch	0-6 6-16 16-37 37-80	15-25 20-35	 1.35-1.55 1.35-1.50 1.30-1.60 1.45-1.65	2-6 0.6-2 0.6-2 2-6	0.11-0.15 0.14-0.16 0.16-0.18 0.08-0.15	0.0-2.9	0.5-1.0 0.4-0.8 0.1-0.3	.28 .32 .32 .32	.28 .32 .32 .32	 2 	 3 	 86
NtC: Nutivoli	 0-6 6-80		 1.30-1.40 1.30-1.45	6-20 6-20	 0.06-0.08 0.06-0.10	•	0.4-1.0	 .10 .10	 .10 .10	 5 	 1 	 220
NtD: Nutivoli	 0-37 37-80		 1.30-1.40 1.30-1.45	6-20 6-20	 0.06-0.08 0.06-0.10	•	0.4-1.0	 .10 .10	 .10 .10 	 5 	 1 	 220
OcA: Olton	 0-6 6-17 17-41 41-80	35-45 30-40	 1.25-1.45 1.25-1.45 1.35-1.50 1.35-1.50	0.6-2 0.2-0.6 0.2-0.6 0.2-0.6	 0.14-0.16 0.18-0.20 0.18-0.20 0.18-0.20	3.0-5.9 3.0-5.9	1.0-2.0 0.0-0.4 0.0-0.2 0.0-0.2	.32 .32 .32 .32	.32 .32 .32 .32	 5 	 6 	 48
OcB: Olton	 0-9 9-25 25-34 34-80	35-45 30-40	 1.25-1.45 1.25-1.45 1.35-1.50 1.35-1.50	0.6-2 0.2-0.6 0.2-0.6 0.2-0.6	 0.14-0.16 0.16-0.18 0.18-0.20 0.18-0.20	3.0-5.9 3.0-5.9	 1.0-2.0 0.5-1.0 0.1-0.5 0.1-0.3	.32 .32 .32 .32	 .32 .32 .32 .32	 5 	 6 	
PcA: Pep	 0-10 10-16 16-32 32-80	18-35 18-35	 1.30-1.60 1.40-1.70 1.40-1.70 1.40-1.70	0.6-2 0.6-2 0.6-2 0.6-2	 0.12-0.18 0.11-0.18 0.10-0.17 0.10-0.15	0.5-5.9	 1.0-2.0 0.5-1.0 0.1-0.5 0.1-0.5	 .32 .32 .32 .32	 .32 .32 .32 .32	 5 	 	 86
PcB: Pep	 0-9 9-15 15-31 31-80	18-35 18-35	 1.30-1.60 1.40-1.70 1.40-1.70 1.40-1.70	0.6-2 0.6-2 0.6-2 0.6-2	 0.12-0.18 0.11-0.18 0.10-0.17 0.10-0.15	0.5-5.9	 1.0-2.0 0.5-1.0 0.1-0.5 0.1-0.5	.32 .32 .32 .32	 .32 .32 .32 .32	 5 	 4L 	 86

Table 17.--Physical Properties of the Soils--Continued

Map symbol	 Depth	Particle size	 Moist	Permea-	 Available	 Linoar	 Organic	Erosi	on fac	tors	Wind erodibility	
and soil name	Depth 	 Clay 	Morst bulk density	bility (K-sat)	•	extensi-	matter 	 Kw	 Kf	 T	 group 	 index
	 In	Pct	 g/cc	In/hr	In/in	Pct	Pct		 	 		
PeA: Pep	 0-7 7-20 20-80	27-35	 1.25-1.40 1.40-1.50 1.40-1.55	0.6-2 0.6-2 0.6-2	0.14-0.16 0.18-0.20 0.18-0.20	3.0-5.9	 1.0-2.0 0.1-1.0 0.1-0.5	.37	 .37 .32 .32	 5 	 4L 	 86
PeB: Pep	 0-14 14-30 30-80	20-35	 1.25-1.40 1.40-1.50 1.40-1.55		 0.14-0.16 0.15-0.17 0.18-0.20	0.0-2.9	1.0-2.0 0.1-1.0 0.1-0.5	 .37 .37 .32	 .37 .37 .32	 5 	 4L 	 86
PMG:	 	 				 	! 		 	 	 	
Potter	0-4 4-9 9-80	18-28	1.30-1.55 1.35-1.60 1.40-1.60	0.6-2 0.2-0.6 0.6-2	0.14-0.16 0.10-0.13 0.05-0.07	0.0-2.9	0.5-1.0 0.1-0.5 0.0-0.0	.37 .20 .05	.37 .37 .37	1 	4L 	86
Mobeetie	 0-12 12-16 16-80	10-18	 1.25-1.45 1.30-1.50 1.40-1.55	2-6 2-6 2-6	 0.14-0.16 0.13-0.15 0.09-0.11	0.0-2.9	0.5-1.0 0.0-0.5 0.0-0.2	.37 .28 .24	 .37 .28 .24	 3 	 4L 	 86
PoA:	 	 	 			 	 		 	 	 	
Portales	0-15 15-35 35-80	27-35	1.30-1.40 1.40-1.50 1.50-1.60	0.6-2	0.17-0.19 0.17-0.19 0.18-0.20	3.0-5.9	1.0-2.0 0.3-0.7 0.1-0.5	.37 .32 .32	.37 .32 .32	4 	4L 	86
PsA:	 	 	 			 	 		 	 	 	
Posey	0-11 11-17 17-42 42-80	20-35 25-35	1.30-1.50 1.25-1.40 1.25-1.55 1.45-1.60	0.6-2	0.13-0.15 0.14-0.16 0.16-0.18 0.16-0.18	0.0-2.9	1.0-3.0 0.5-1.0 0.0-0.4 0.1-0.3	.28 .37 .32 .32	.28 .37 .32 .32	3 	3 	86
PsB:	 	 	 			 	 		 	 	 	
Posey	0-5 5-33 33-49 49-80	20-35 25-35	1.30-1.50 1.25-1.40 1.25-1.55 1.45-1.60		0.13-0.15 0.14-0.16 0.16-0.18 0.16-0.18	0.0-2.9	0.0-1.0 0.5-1.0 0.0-0.4 0.0-0.0	.28 .37 .32 .32	.28 .37 .32 .32	3 	3 	86
PsC: Posey	 0-12 12-22 22-38 38-80	25-35 25-35	 1.30-1.50 1.25-1.40 1.25-1.55 1.45-1.60	2-6 0.6-2 0.6-2 0.6-2	 0.13-0.15 0.14-0.16 0.16-0.18 0.16-0.18	0.0-2.9	 1.0-3.0 0.5-1.0 0.2-0.5 0.1-0.4	 .28 .37 .32 .32	 .28 .37 .32 .32	 3 	 3 	 86

Map symbol	 Depth	Particle size	 Moist	 Permea-	 Available	 	Organic	Erosi	on fac	tors		nd bility
and soil name	Deptil	Clay	bulk density	bility (K-sat)	water capacity	extensi-	matter	 Kw	 Kf	 T	 group	 index
RaA:	In	Pct	g/cc	In/hr	In/in	Pct	Pct		 		ļ	
Randall	0-17 17-28 28-80	50-70		0.00-0.06 0.00-0.06 0.00-0.06	0.12-0.18	 10.0-25.0 10.0-25.0 10.0-25.0	0.5-1.0	.20 .20 .20	.20 .20 .20	 5 	 7 	 38
RcA: Ranco	 0-5 5-12 12-80	40-50	1.25-1.40	 0.00-0.06 0.00-0.06 0.00-0.06	0.12-0.18	 9.0-25.0 9.0-25.0 9.0-25.0	0.5-1.0	.20 .20 .20	 .20 .20 .20	 5 	 7 	 38
SaA: Slaughter	 0-6 6-18 18-30 30-80	35-40	 1.30-1.50 1.30-1.50 1.35-1.55	0.2-0.6	 0.14-0.16 0.18-0.20 0.16-0.18	j i	1.0-3.0 0.0-0.5 0.0-0.1	.37 .32 .32	 .37 .32 .32	 1 	 6 	 48
SnC: Spantara	 0-10 10-45 45-80	10-18	 1.45-1.70 1.40-1.60 1.40-1.60	2-6	 0.08-0.10 0.10-0.14 0.10-0.14	0.0-2.9	0.3-0.8 0.2-0.5 0.1-0.2	 .10 .24 .17	 .10 .24 .17	 5 	 2 1 	 134
SpA: Sparenberg	 0-4 4-12 12-46 46-80	40-50 40-50	1.25-1.40 1.30-1.45	0.00-0.06 0.00-0.06 0.00-0.06 0.00-0.06	0.12-0.18 0.11-0.15	 9.0-25.0 9.0-25.0 9.0-25.0 9.0-25.0	0.5-2.0 0.1-1.0	 .20 .20 .20 .20	 .20 .20 .20 .20	 5 	 7 	 38
SsA: Sparks	 0-6 6-18 18-80	35-50	 1.30-1.35 1.60-1.65 1.50-1.55	0.06-0.2	 0.16-0.18 0.15-0.19 0.19-0.21	3.0-5.9	1.0-2.0 0.5-1.0 0.2-0.5	 .37 .20 .32	 .37 .20 .32	 5 	 5 	 56
W: Water	 	 	 	 	 				 	 	 	

Table 17.--Physical Properties of the Soils--Continued

Table 18.--Chemical Properties of the Soils (Absence of an entry indicates that data were not estimated.)

Map symbol and soil name		 Cation exchange capacity 			 Gypsum 	Salinity	 Sodium adsorp- tion ratio
10:	In	meq/100 g	pH	Pct	Pct	mmhos/cm	
Regnier	0-3 3-12 12-60	8.0-20 10-25 	7.4-8.4 7.4-8.4 	10-25 15-30 	0-5 0-5 	0.0-2.0 0.0-4.0 	0-1 0-3
Rock outcrop	0-60		 	ļ ļ			
Lacoca 	0-8 8-60	 3.0-15 	 7.9-8.4 	5-30 	0-2 	0.0-2.0	0-1
11: Tucumcari 	0-5 5-19 19-49 49-60	 15-25 15-28 14-30 14-30	 6.6-8.4 7.4-8.4 7.4-8.4 7.4-8.4	 0-1 0-1 5-15 5-15	0-1 0-1 0-1 0-5	0.0-2.0 0.0-2.0 0.0-2.0 0.0-4.0	0-1 0-1 0-1 0-1
Hassell 	0-4 4-22 22-32 32-60	15-30 18-35 18-35 	7.4-8.4 7.9-8.4 7.9-8.4	0-1	0-2 0-2 0-5 	0.0-2.0 0.0-2.0 0.0-2.0	0-1 0-1 0-1
13: Tucumcari 	0-5 5-19 19-49 49-60	 9.0-20 15-28 12-30 15-30	6.6-8.4 7.4-8.4 7.4-8.4 7.4-8.4	 0-1 0-1 5-15 5-15	0-1 0-1 0-1 0-5	0.0-2.0 0.0-2.0 0.0-2.0 0.0-4.0	0-1 0-1 0-1 0-1
Redona	0-4 4-23 23-60	 7.0-18 15-25 15-22	7.4-8.4 7.4-8.4 7.4-8.4	0-2 0-20 15-35	0-1	0.0-2.0 0.0-2.0 0.0-2.0	0-1 0-1 0-1
28: Lacoca	0-12 12-60	 3.0-15 	 7.9-8.4 	 5-15 	0-1 	0.0-2.0	0-1
San Jon	0-6 6-33 33-60	8.0-20 11-24	7.4-9.0 7.4-9.0	3-10 15-35 	0-1 0-3 	0.0-2.0 0.0-2.0 	0-1 0-1
Rock outcrop	0-60	 	 				
31: Chispa	0-7 7-43 43-60	 8.0-15 10-20 6.0-20	7.9-8.4 7.9-8.4 7.9-8.4	 10-15 10-20 15-45	0 0 0	0.0-2.0 0.0-4.0 0.0-8.0	0-2 0-2 0-2
Redona 	0-8 8-60	 5.0-10 15-25	 7.4-8.4 7.4-8.4	 0-2 5-25	0 0 0-1	0.0-2.0 0.0-2.0	 0-2 0-2
32: Regnier	0-8 8-12 12-60	 8.0-20 10-23 	7.4-8.4 7.4-8.4 	 5-10 15-25 	0-2 0-5 	0.0-2.0 0.0-4.0	0-1 0-1
Lacoca 	0-5 5-60	 3.0-15 	 7.9-8.4 	 5-10 10-30	0-1 0-2	0.0-2.0 0.0-2.0	0-1
Rock outcrop	0-60	 	 		 		

Table 18.--Chemical Properties of the Soils--Continued

Map symbol and soil name	 Depth	 Cation exchange			Gypsum	Salinity	 Sodium adsorp-
anu sori name	 	exchange capacity 	reaction -	ate			tion ratio
36:	 In	meq/100 g	 pH	Pct	Pct	mmhos/cm	[
Alama	0-3 3-28 28-60	12-26 11-26 11-26	7.4-8.4 7.4-8.4 7.9-8.4	0-5 5-10 5-15	0-1 0-1 0-2	0.0-2.0 0.0-2.0 0.0-2.0	0-1 0-1 0-1
37: Ima	0-12 12-60	 5.0-10 5.0-10	7.4-7.8 7.4-8.4	 0-4 5-15	0	0.0-2.0 0.0-2.0	 0-2 0-2
Gallen	0-5 5-20 20-60	6.0-15 4.0-10 0.0-1.0	7.4-8.4 7.4-8.4 7.4-8.4	5-10 5-10 5-10	0 0-1 0-1	0.0-2.0 0.0-2.0 0.0-2.0	0-1 0-1 0-1
58: Redona	 0-6 6-60	 5.0-15 15-25	7.4-8.4 7.4-8.4	 0-1 5-25	0 0-1	0.0-2.0 0.0-2.0	 0-2 0-2
Armesa	0-2 2-60 	10-25 6.0-15 	7.9-8.4 7.9-8.4	10-15 45-65 	0	0.0-2.0 0.0-2.0	0-2 0-2
60: Chispa	 0-7 7-32 32-60	 8.0-15 10-20 6.0-20	7.9-8.4 7.9-8.4 7.9-8.4	 10-15 10-20 15-45	0 0 0	0.0-2.0 0.0-4.0 0.0-8.0	0-2 0-2 0-2
Armesa	0-10 10-60	 6.0-20 6.0-15	7.9-8.4 7.9-8.4	10-15 45-65	0	0.0-2.0 0.0-2.0	0-2
Redona	 0-6 6-60	 5.0-10 15-25	7.4-8.4 7.4-8.4	0-2 5-25	0 0-1	0.0-2.0 0.0-2.0	0-2 0-2
61: Berwolf	 0-11 11-42 42-60	 4.0-10 4.0-10 3.0-9.0	7.4-7.8 7.9-8.4 7.9-8.4	 0-1 1-5 10-25	0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0	0-2 0-2 0-2
Roswell	0-8 8-60	3.0-7.0	 6.6-7.8 6.6-8.4	0-1 0-2	0 0	0.0-2.0 0.0-2.0	 0 0
AcA: Acuff	 0-9 9-16 16-33 33-80	 10-25 15-25 15-25 15-25	 6.6-7.3 7.4-7.8 7.4-7.8 7.9-8.4	0-2 0-5 5-10 20-60	0 0 0 0	0.0-1.0 0.0-1.0 0.0-1.0 0.0-1.0	
AcB: Acuff	 0-7 7-33 33-80	 10-25 15-25 15-25	 6.6-7.3 7.4-7.8 7.9-8.4	 0-2 0-5 20-60	0 0 0	0.0-1.0 0.0-1.0 0.0-1.0	 0-1 0-1 0-1
AfA: Amarillo	 0-9 9-42 42-80	 5.0-10 10-20 10-20	 6.6-7.8 7.4-7.8 7.9-8.4	 0-2 0-20 30-50	0 0 0	0.0-1.0 0.0-1.0 0.0-1.0	 0-1 0-2 0-2
AfB: Amarillo	 0-10 10-35 35-80	 5.0-10 10-20 10-15	 6.6-7.8 7.4-7.8 7.9-8.4	 0-1 0-5 20-50	0 0 0	0.0-1.0 0.0-1.0 0.0-2.0	 0-1 0-1 0-1

Table 18.--Chemical Properties of the Soils--Continued

Map symbol and soil name	 Depth 	 Cation exchange capacity 	 Soil reaction 	 Calcium carbon- ate 	Gypsum	Salinity	Sodium adsorp- tion ratio
	 In	 meq/100 g	 pH	Pct	Pct	mmhos/cm	
AnB: Amarillo	 0-7 7-37 37-80	 3.0-7.0 10-20 10-20	 6.6-7.8 7.4-7.8 7.9-8.4	0-1 0-5 30-50	0 0 0	0.0-1.0 0.0-1.0 0.0-1.0	0-1 0-1 0-1
AvA: Arvana	 0-8 8-17 17-31 31-35 35-80	 5.0-15 10-20 10-15 10-20	6.6-8.4 7.4-8.4 7.4-8.4 7.9-8.4	0-1	0 0 0 0-5	0.0-4.0 0.0-2.0 0.0-2.0 0.0-1.0	0-4 0-4 0-4 1 0-4 1 1 0-1
BcA: Bippus	 0-13 13-23 23-80	 10-20 10-20 10-20	7.4-8.4 7.9-8.4 7.4-8.4	 0-2 0-5 5-15	0-1 0 0-5	0.0-1.0 0.0-2.0 0.0-2.0	0-4
DRC: Drake	 0-7 7-28 28-55 55-80	 10-20 10-20 10-15 10-15	7.4-8.4 7.9-9.0 7.9-9.0 7.9-9.0	2-15 5-20 15-30 10-30	0-2 0-4 0-4 0-4	0.0-4.0 0.0-4.0 0.0-4.0 0.0-4.0	 0-7 0-13 0-13 0-13
EsA: Estacado	 0-11 11-20 20-80	 7.0-15 10-20 10-20	7.4-8.4 7.4-8.4 7.9-8.4	2-10 2-10 2-10	0 0 0-1	0.0-1.0 0.0-1.0 0.0-1.0	 0-10 0-1 0-1
EsB: Estacado	 0-13 13-22 22-30 30-80	7.0-15 10-20 10-20 10-20	7.4-8.4 7.4-8.4 7.9-8.4 7.9-8.4	2-10 2-10 2-10 30-45 15-40	0 0 0 0-1	0.0-1.0 0.0-1.0 0.0-1.0 0.0-2.0	0 0 0-1 0-1
FrA: Friona	0-6 6-24 24-30 30-41 41-80	5.0-15 15-25 10-20 10-20	6.6-8.4 7.4-8.4 7.4-8.4 7.9-8.4	0-1 0-1 2-10 	0 0 0 0-5	0.0-1.0 0.0-1.0 0.0-1.0 0.0-1.0	0-1 0-1 0-1 0-1
GoB: Gomez	 0-12 12-20 20-23 23-47 47-80	2.0-5.0 5.0-15 5.0-10 2.0-10 2.0-5.0	7.4-8.4 7.9-8.4 7.9-8.4 7.9-8.4 7.4-8.4	 5-15 10-30 10-30 30-50 10-30	0 0-1 0 0-2	0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0	0-2 0-2 0-2 0-5 0-5
GrA: Grier	 0-4 4-18 18-35 35-80	 25-35 10-25 10-25 10-25	7.9-8.4 7.9-9.0 7.4-8.4 7.9-9.0	 15-30 20-40 20-40 20-40	0-1 0-1 0-2 0-4	0.0-4.0 2.0-6.0 4.0-8.0 4.0-8.0	 0-4 0-4 4-8 10-20
KmB: Kimberson	 0-5 5-14 14-20 20-80	 6.0-10 6.0-10 6.0-10	7.4-8.4 7.4-8.4 7.4-8.4 7.4-8.4	5-20 20-40 30-60	0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-1

Table 18.--Chemical Properties of the Soils--Continued

Map symbol and soil name	Depth	 Cation exchange capacity 		 Calcium carbon- ate 	Gypsum 	Salinity	 Sodium adsorp- tion ratio
	In	 meq/100 g	 pH	Pct	Pct	mmhos/cm	-! !
.cA: Lazbuddie	0-10 10-45 45-80	 20-40 20-40 20-40	 7.4-8.4 7.4-8.4 7.4-8.4	1-3 1-5 5-15	0 0 0-5	0.0-2.0 0.0-2.0 0.0-2.0	 0-4 0-4 0-4
.oA: Lofton	0-6 6-25 25-80	 15-35 15-35 15-25	 6.6-8.4 7.4-8.4 7.9-8.4	 0-1 0-5 15-40	0 0 0-2	0.0-2.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-2
Mclean	0-6 6-41 41-61 61-80	 40-60 40-60 40-60 40-60	 7.4-8.4 7.4-8.4 7.9-8.4 7.9-8.4	 1-3 1-5 5-15 5-15	0 0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-1 0-1
1sD: Milsand	0-6 6-30 30-80	 3.6-9.8 3.6-9.3 1.6-8.0	 6.6-8.4 6.6-8.4 6.6-8.4	 0-3 0-3 0-3	0 0 0	0.0-2.0 0.0-2.0 0.0-2.0	 0 0 0
nsE: Milsand	0-8 8-30 30-37 37-80	2.0-4.0	 7.4-8.4 7.4-8.4 7.5-8.4 7.9-8.4	 3-6 3-6 3-10 3-10	0 0 0 0	0.0-1.0 0.0-1.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-1 0-1
Arch	0-6 6-16 16-37 37-80	 1.0-7.5 10-20 10-20 10-20	 6.8-7.9 7.4-7.9 7.4-8.4 7.4-8.4	10-25 30-50 40-60 40-60	0 0-2 0-2 0-2	0.0-1.0 0.0-2.0 0.0-4.0 0.0-4.0	 0-1 0-1 0-2 0-2
NtC: Nutivoli	0-6 6-80	 1.0-1.0 1.0-1.0	 6.6-7.8 6.6-7.8	 0-1 0-1	0 0	0.0-1.0 0.0-1.0	0 0-1
NtD: Nutivoli	0-28 28-80	 1.0-4.0 1.0-4.0	 6.6-7.8 6.6-7.8	 0-1 0-1	0 0	0.0-2.0 0.0-2.0	0 0-1
OcA: Olton	0-6 6-17 17-41 41-80	 10-25 20-30 15-25 15-25	 6.6-7.3 7.4-7.8 7.4-7.8 7.9-8.4	 0-1 0-5 5-10 20-50	0 0 0 0-4	0.0-1.0 0.0-1.0 0.0-1.0 0.0-2.0	 0-1 0-1 0-1 0-1
OcB: Olton	0-9 9-25 25-34 34-80	 10-25 20-30 15-25 15-25	 6.6-7.3 7.4-7.8 7.4-7.8 7.9-8.4	 0-1 0-5 5-10 20-50	0 0 0 0-2	0.0-1.0 0.0-1.0 0.0-1.0 0.0-1.0	 0-1 0-1 0-1 0-1
PcA: Pep	0-10 10-16 16-32 32-80	 10-15 10-15 10-15 10-15	 7.4-8.4 7.4-8.4 7.4-8.4 7.8-8.4	 2-5	0 0 0 0	0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0	 0 0 0

Table 18.--Chemical Properties of the Soils--Continued

Map symbol and soil name	Depth	 Cation exchange capacity 		 Calcium carbon- ate 		Salinity	Sodium adsorp- tion ratio
	In	 meq/100 g	 pH	 Pct	Pct	mmhos/cm	-
PcB: Pep	0-9 9-15 15-31 31-80	 10-15 10-15 10-15 10-15	7.4-8.4 7.4-8.4 7.4-8.4 7.8-8.4	2-5 5-15 5-30 15-40	0 0 0 0	0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0	 0 0 0
PeA: Pep	0-7 7-20 20-80	 10-15 10-20 10-20	7.4-8.4 7.4-8.4 7.4-8.4	 5-15 10-25 25-40	0 0 0-1	0.0-1.0 0.0-1.0 0.0-2.0	 0-1 0-1 0-1
PeB: Pep	0-14 14-30 30-80	 10-15 10-20 10-20	7.4-8.4 7.4-8.4 7.4-8.4	 5-15 10-25 25-40	0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-2
PMG: Potter	0-4 4-9 9-80	 5.0-10 5.0-15 5.0-15	7.9-8.4 7.9-8.4 7.9-8.4	 5-20 40-60 50-80	0 0 0-5	0.0-2.0 0.0-2.0 0.0-2.0	0-2 0-4 0-4
Mobeetie	0-12 12-16 16-80	 5.0-15 5.0-15 5.0-15	7.4-7.8 7.9-8.4 7.9-8.4	0-10 5-10 10-15	0 0-1 0-1	0.0-2.0 0.0-2.0 0.0-2.0	0-2 0-2 0-2
PoA: Portales	0-15 15-35 35-80	 15-20 15-20 10-15	7.4-8.4 7.4-8.4 7.4-8.4	 5-15 5-15 15-40	0 0 0-1	0.0-1.0 0.0-1.0 0.0-2.0	 0-1 0-1 0-1
PsA: Posey	0-11 11-17 17-42 42-80	 5.0-15 8.0-15 10-20 10-20	7.9-8.4 7.4-8.4 7.9-8.4 7.9-8.4	 5-20 5-15 10-30 30-50	0 0 0 0 0-2	0.0-1.0 0.0-1.0 0.0-1.0 0.0-2.0	0-1 0-1 0-1 0-2
PsB: Posey	0-6 6-13 13-52 52-80	 5.0-15 8.0-15 10-20 10-20	7.9-8.4 7.4-8.4 7.9-8.4 7.9-8.4	5-15	0-1 0-1 0-2 0-5	0.0-1.0 0.0-1.0 0.0-1.0 0.0-2.0	0-4 0-4 0-4 0-4
PsC: Posey	0-12 12-22 22-38 38-80	 5.0-15 8.0-15 10-20 10-20	 6.8-7.9 7.4-8.4 7.9-8.4 7.9-8.4	 5-15 5-15 10-30 30-50	0 0 0 0 0-1	0.0-1.0 0.0-1.0 0.0-1.0 0.0-2.0	0-1 0-1 0-1 0-2
RaA: Randall	0-17 17-28 28-80	 40-50 40-50 40-50	7.4-8.4 7.4-8.4 7.9-8.4	 1-3 1-5 5-15	0 0 0-2	0.0-2.0 0.0-2.0 0.0-2.0	 0-1 0-1 0-1
RcA: Ranco	0-5 5-12 12-80	 40-50 40-50 40-50	7.4-8.4 7.4-8.4 7.9-8.4	 1-3 1-5 5-15	0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0	 0 0 0-1

Table 18.--Chemical Properties of the Soils--Continued

Map symbol and soil name	Depth 	Cation exchange capacity 	 Soil reaction 	Calcium carbon- ate	Gypsum 	Salinity	Sodium adsorp- tion ratio
	In	meq/100 g	 pH	Pct	Pct	mmhos/cm	·
SaA: Slaughter	 0-6 6-18 18-30	8.0-20 15-25	 6.6-8.4 7.4-8.4	0-1 0-10	0 0-1 	0.0-1.0 0.0-1.0	0-1 0-4
	30-80	10-20	7.4-8.4	20-50	0-2	0.0-4.0	0-4
SnC:			 			0.01.0	
Spantara	0-10 10-45 45-80	2.0-6.0 5.0-10 5.0-10	6.6-7.8 6.6-8.4 6.6-8.4	0-1 0-5 0-20	0 0 0	0.0-1.0 0.0-1.0 0.0-1.0	0 0 0-1
SpA:			 		 		
Sparenberg	0-4 4-12 12-46 46-80	40-60 40-60 40-50 40-50	7.4-8.4 7.4-8.4 7.9-8.4 7.9-8.4	1-3 1-5 5-15 5-15	0 0 0 0	0.0-2.0 0.0-2.0 0.0-2.0 0.0-2.0	0 0 0 0
SsA:			 				
Sparks	0-6 6-18 18-80	9.0-20 15-30 10-20	6.6-7.3 6.6-7.8 7.9-8.4	0-1 0-5 1-30	0 0 0-1	0.0-2.0 0.0-2.0 0.0-2.0	0-1 0-1 0-1
W: Water		 	 		 		
	l	l	l	l			.

Table 19.--Water Features
(Depths of layers are in feet)

			Water	Table		Ponding		Flooding		
and soil name	 Hydro- logic group		 Upper limit 		Surface water depth		Frequency 	 Duration 	 	
10: Regnier		 All months	 	 			 	 		
Rock outcrop		 All months	 				 	 	 	
Lacoca		 All months	 				 	 	 	
11: Tucumcari	 C 	 All months	 				 	 	 	
Hassell		 All months	 				 	 	 	
13: Tucumcari		 All months	 		 		 	 	 	
Redona		 All months	 				 	 	 	
28: Lacoca	 D 	 All months	 				 	 	 	
San jon	 C 	 All months	 				 	 	 	
Rock outcrop		 All months	 				 	 	 	

			Water	Table	 	Ponding		Flooding		
and soil name	 Hydro- logic group		 Upper limit 	Lower limit 	 Surface water depth		Frequency 	Duration		
31: Chispa	İ	 All months	; 		 				 	
Redona	 B 	 All months	 		 		 			
32: Regnier	 D 	 All months	 		 		 			
Lacoca	 D 	 All months	 		 		 			
Rock outcrop	 D 	 All months 	 		 		 			
36: Alama	 C 	 All months 	i 	 	i i 		 			
37: Ima	 A 	 All months	 		 		 			
Gallen	 A 	 All months 	 				 			
58: Redona	 B 	 All months	 		 		 			
Armesa	 B 	 All months 	 		 		 			

Table 19.--Water Features--Continued

		[Water	Table		Ponding		Floo	ding
and soil name	 Hydro- logic group		Upper limit 	Lower limit 	Surface water depth	Duration	Frequency 		Frequency
60: Chispa	i	 All months	 	 			 		
Armesa	 B 	 All months	 	 			 	 	
Redona		 All months	 				 	 	
61: Berwolf	 B 	 All months	 				 	 	
Roswell	 A 	 All months	 	 			 	 	
AcA: Acuff	 B 	 All months	 				 	 	
AcB:		 All months	 				 	 	
AfA: Amarillo	 B 	 All months	 				 	 	
AfB:		 All months	 				 	 	
AnB:		 All months	 				 	 	
AvA: Arvana	 C 	 All months 	 				 	 	

Table 19.--Water Features--Continued

		<u> </u>		Table	 	Ponding		Floo	ding
	 Hydro- logic group 		 Upper	Lower limit 	 Surface		Frequency 		Frequency
BcA: Bippus	 B 	 Jan-Mar Apr-Oct Nov-Dec	 	 	 	 	 None None	 	
DRC: Drake	 B 	 All months 	 	 			 		
EsA: Estacado	 B 	 All months 	 	 			 		
EsB:		 All months	 	 			 		
FrA: Friona	 C	 All months	 	 			 		
GoB: Gomez	 B 	 All months	 	 			 		
GrA: Grier					 0.0-0.5 0.0-0.5		 Occasional Frequent	 	
KmB: Kimberson	 D 	 All months 	 	 			 		
LcA: Lazbuddie	 D 	 May-Sep 	 	 	 0.0-1.0 		 Rare		

Table 19.--Water Features--Continued

-		<u> </u>	Water	Table	 	Ponding	 	Floor	ding
and soil name	 Hydro- logic group		Upper limit 	Lower limit 	Surface	Duration 		Duration	Frequency
LoA: Lofton	İ	 All months	 	 		 			
McA: Mclean	j	 Apr	 			 Very brief	 Occasional		
		May-Sep Oct	 	 			Occasional Occasional		
MsD: Milsand	 A 	 All months	 		 	 	 		
MsE: Milsand	 A 	 All months	 			 	 		
Arch	 B 	 All months	 			 	 		
NtC: Nutivoli	 A	 	 			 			
		All months				 			
NtD:	 	 All months	 	 		 	 		
OcA: Olton	 C 	 All months	 		 	 	 		
OcB: PcA:	 	 All months 	 		 	 	 		
Pep	В 	 All months 	 			 	 		

Table 19.--Water Features--Continued

		<u> </u>		Table		Ponding		Floo	ding
	 Hydro- logic group	 Month 	 Upper	Lower limit 		Duration	 Frequency	Duration	Frequency
PcB: Pep	i	 All months	 	 	 		 		
PeA: Pep	 B 	 All months	 				 		
PeB: PepPMG:	 B 	 All months	 						
Potter	 B 	 All months	 				 		
Mobeetie	A 	 All months	 				 		
PoA: Portales	 B 	 All months	 				 		
PsA: Posey	 B 	 All months	 				 		
PsB:		 All months	 				 		
PsC:	 	 All months	 				 		
RaA: Randall	 	May-Jun Jul-Aug Sep Oct	0.0-0.5 0.0-0.5 0.0-0.5	5 2.0-3.0 5 2.0-3.0	 0.0-1.0 0.0-3.0 0.0-3.0 0.0-1.0 	Long Long Long	 Frequent Frequent Frequent Frequent Frequent	 	

Table 19Water	FeaturesContinued
---------------	-------------------

		[Water	Table	<u> </u>	Ponding		Floor	ding
Map symbol and soil name	 Hydro- logic group				Surface Surface water depth	Duration 	Frequency 	 Duration 	Frequency
RcA:	 D	 	 	 	 	 	 	 	
	i	 Apr	1.0-1.5	2.0-3.0	0.0-1.0	Brief	Frequent		
	Ì	May-Jun	0.0-0.5	2.0-3.0	0.0-3.0	Long	Frequent		
	1	Jul-Aug			0.0-3.0	Long	Frequent		
		Sep	0.0-0.5	2.0-3.0	0.0-3.0	Long	Frequent		
	1				0.0-1.0	Brief	Frequent		
		Nov	1.0-1.5	2.0-3.0					
SaA: Slaughter	 D 	 All months	 	 	 	 	 	 	
SnC: Spantara	 A 	 All months	 	 	 	 	 	 	
SpA: Sparenberg	 D	 	 	 	 	 - 		 	
		Apr				Very brief			
	1	May-Sep		:		•	Occasional	•	
		0ct 	 	 :	0.0-0.6 	Very brief 	Occasional		
SsA: Sparks	 C 	 All months 	 	 	 	 	 	 	
W: Water	 	 All months	i 	i 	 	 	 	 	

Table 20.--Soil Features

(See text for definitions of terms used in this table. Absence of an entry indicates that the feature is not a concern or that data were not estimated.)

Map symbol	Restrictive layer		 Potential	Risk of	corrosion
and soil name	 	Depth to top	for frost action	Uncoated steel	 Concrete
10.		In			
10: Regnier	 Paralithic bedrock	12-20	Low	 High	Low
Rock outcrop	 Lithic bedrock	0-0	 	 	
Lacoca	 Lithic bedrock	4-20	 Low	 Moderate	 Low
11: Tucumcari	 		 Low	 High	 Low
Hassell	 Paralithic bedrock	20-40	 Low	 High '	 Low
13: Tucumcari	 		 Low	 High	 Low
Redona			 Low	 Moderate	Low
28: Lacoca	 Lithic bedrock	4-20	 Low	 Moderate	 Low
San Jon	 Paralithic bedrock	20-40	Low	 High 	Low
Rock outcrop	 Lithic bedrock	0-0		 	
31: Chispa				 High	 Low
Redona	 		 Low	 Moderate	Low
32: Regnier	 Paralithic bedrock	12-20	 Low	 High	 Low
Lacoca	 Lithic bedrock	4-20		 Moderate	Low
Rock outcrop	 Lithic bedrock	0-0		 	
36: Alama			 Low	 High	 Low
37: Ima			 Low	 High	 Low
Gallen			 Low	 High	Low
58: Redona	 		 Low	 Moderate	 Low
Armesa	 		 Low	 High '	 Low
60: Chispa			 Low	 High	 Low
Armesa	 		 Low	 High 	 Low
Redona	 		 Low 	 Moderate 	 Low

Table 20.--Soil Features--Continued

And Soil name	Map symbol	Restrictive layer		 Potential	Risk of	corrosion
Serwolf		 		for		 Concrete
Nowell	61:	 	<u> </u>	 		
ACA:	Berwolf	İ	j	Low	 High 	Low
ACUFF	Roswell	 	i	Low	Moderate 	Low
AFA: Amarillo	AcA: Acuff	 	i 	 Low 	 High 	 Low
Amarillo	AcB: Acuff	 	 	 Low 	 High 	 Low
Amarillo	AfA: Amarillo	 	i 	 Low 	 High 	 Low
Amarillo		 	i 	 Low 	 High 	 Low
Arvana	AnB: Amarillo	 	i 	 Low 	 High 	 Low
Bippus		 Petrocalcic	20-40	 Low 	 High 	 Low
Drake			 	 Low	 Moderate	 Low
Estacado	DRC: Drake		 	 None	 High	 Low
Estacado	EsA: Estacado		 	 Low	 High	 Low
Friona	EsB: Estacado		 	 Low	 High	 Low
Gomez		 Petrocalcic	20-40	 Low	 High	 Low
Grier Low High Moderat KmB:			 	 Low	 High	 High
Kimberson	GrA: Grier		 	 Low	 High	 Moderate
Lazbuddie Low High Low LoA: Lofton Low High Low McA: McLean None High Low MsD: Milsand None Low Low MsE: Milsand Low Moderate Low		 Petrocalcic	10-20	 Low	 High	 Low
Lofton				 Low	 High	 Low
McLean None High Low MsD: None Low Low Milsand None Low Low MsE: Low Moderate Low				 Low	 High	 Low
Milsand None Low Low MsE: <td>McA: McLean</td> <td></td> <td> </td> <td> None</td> <td> High</td> <td> Low</td>	McA: McLean		 	 None	 High	 Low
Milsand Low Moderate Low	MsD: Milsand		 	 None	 Low	 Low
Arch	MsE: Milsand			 Low	 Moderate	 Low
The state of the s	Arch	 		 Low	 Moderate	 Low

Table 20.--Soil Features--Continued

Map symbol	Restrictive layer		 Potential	Risk of	corrosion
and soil name	 Kind	Depth to top	for for frost action	Uncoated steel	 Concrete
NtC: Nutivoli		In 	 Low	 High	 Low
NtD: Nutivoli			 Low	 High	 Low
OcA: Olton	 	 	 Low	 High	 Low
OcB: Olton	 	 	 Low	 High	 Low
PcA: Pep	 	 	 None	 High	 Low
PcB: Pep	 	 	 None	 High	 Low
PeA: Pep	 	 	 Low	 High	 Low
PeB: Pep	 	 	 Low	 High	 Low
PMG:	 	 	 Low	 Moderate	 Low
Mobeetie		 	 Low	 Low	 Low
PoA: Portales	 	 	 Low	 High	 Low
PsA: Posey	 	 	 Low	 High	 Low
PsB: Posey	 	 	 Low	 High	 Low
PsC: Posey	 	 	 Low	 High	 Low
RaA: Randall	 	 	 Low	 High	 Low
RcA: Ranco	 	 	 None	 High	 Low
SaA: Slaughter	 Petrocalcic	 9-20	 Low	 High	 Low
SnC: Spantara	 	 	 Low	 High	 Low
SpA: Sparenberg	 	 	 None	 High	 Low
SsA: Sparks	 	 	 Low	 High	 Low
W: Water	 	 	 	 	


Table 21.--Taxonomic Classification of the Soils

(An asterisk in the first column indicates a taxadjunct to the series. See text for a description of those characteristics that are outside the range of the series.)

Soil name	Family or higher taxonomic class
Acuff	 Fine-loamy, mixed, superactive, thermic Aridic Paleustolls
	Fine-silty, mixed, superactive, thermic Ustic Haplocambids
Amarillo	Fine-loamy, mixed, superactive, thermic Aridic Paleustalfs
Arch	Fine-loamy, carbonatic, thermic Aridic Calciustepts
Armesa	Fine-loamy, carbonatic, thermic Ustic Haplocalcids
	Fine-loamy, mixed, superactive, thermic Petrocalcic Paleustalfs
	Coarse-loamy, mixed, superactive, thermic Ustic Calciargids
	Fine-loamy, mixed, superactive, thermic Cumulic Haplustolls
	Fine-loamy, mixed, superactive, thermic Ustic Haplocalcids
	Fine-loamy, mixed, superactive, thermic Aridic Calciustepts
	Fine-loamy, mixed, superactive, thermic Aridic Paleustolls
Friona	Fine-loamy, mixed, superactive, thermic Petrocalcic Paleustolls
	Loamy-skeletal, mixed, superactive, thermic Ustic Haplocalcids
	Coarse-loamy, mixed, active, thermic Aridic Calciustepts
	Fine-loamy, mixed, superactive, calcareous, thermic Typic Endoaquepts
	Fine, smectitic, thermic Ustertic Haplargids
	Coarse-loamy, mixed, superactive, thermic Ustic Haplocambids
	Loamy, mixed, superactive, thermic, shallow Petrocalcic Calciustolls
	Loamy, mixed, superactive, calcareous, thermic Lithic Ustic Torriorthents
	Fine, smectitic, thermic Calcic Haplusterts
	Fine, mixed, superactive, thermic Vertic Argiustolls
	Fine, smectitic, thermic Udic Haplusterts
	Mixed, thermic Aridic Ustipsamments
	Coarse-loamy, mixed, superactive, thermic Aridic Haplustepts
	Mixed, thermic Aridic Ustipsamments
	Fine, mixed, superactive, thermic Aridic Paleustolls
	Fine-loamy, mixed, superactive, thermic Aridic Calciustolls
	Fine-loamy, mixed, superactive, thermic Aridic Calciustolls
Posev	Fine-loamy, mixed, superactive, thermic Calcidic Paleustalfs
	Loamy-skeletal, carbonatic, thermic Petronodic Ustic Haplocalcids
	Fine, smectitic, thermic Ustic Epiaquerts
	Fine, smectitic, thermic Ustic Epiaquerts
	Fine-loamy, mixed, superactive, thermic Ustic Calciargids
	- Loamy, mixed, superactive, calcareous, thermic, shallow Ustic Torriorthents
	Mixed, thermic Ustic Torripsamments
	Fine-loamy, mixed, superactive, thermic Ustic Haplocalcids
	Clayey, mixed, superactive, thermic, shallow Petrocalcic Paleustolls
	Coarse-loamy, mixed, superactive, thermic Aridic Haplustalfs
=	- Fine, smectitic, thermic Udic Haplusterts
	Fine, mixed, superactive, thermic Aridic Paleustalfs
	- Fine, smectitic, thermic Ustertic Haplargids

NRCS Accessibility Statement

The Natural Resources Conservation Service (NRCS) is committed to making its information accessible to all of its customers and employees. If you are experiencing accessibility issues and need assistance, please contact our Helpdesk by phone at 1-800-457-3642 or by e-mail at ServiceDesk-FTC@ftc.usda.gov. For assistance with publications that include maps, graphs, or similar forms of information, you may also wish to contact our State or local office. You can locate the correct office and phone number at http://offices.sc.egov.usda.gov/locator/app.

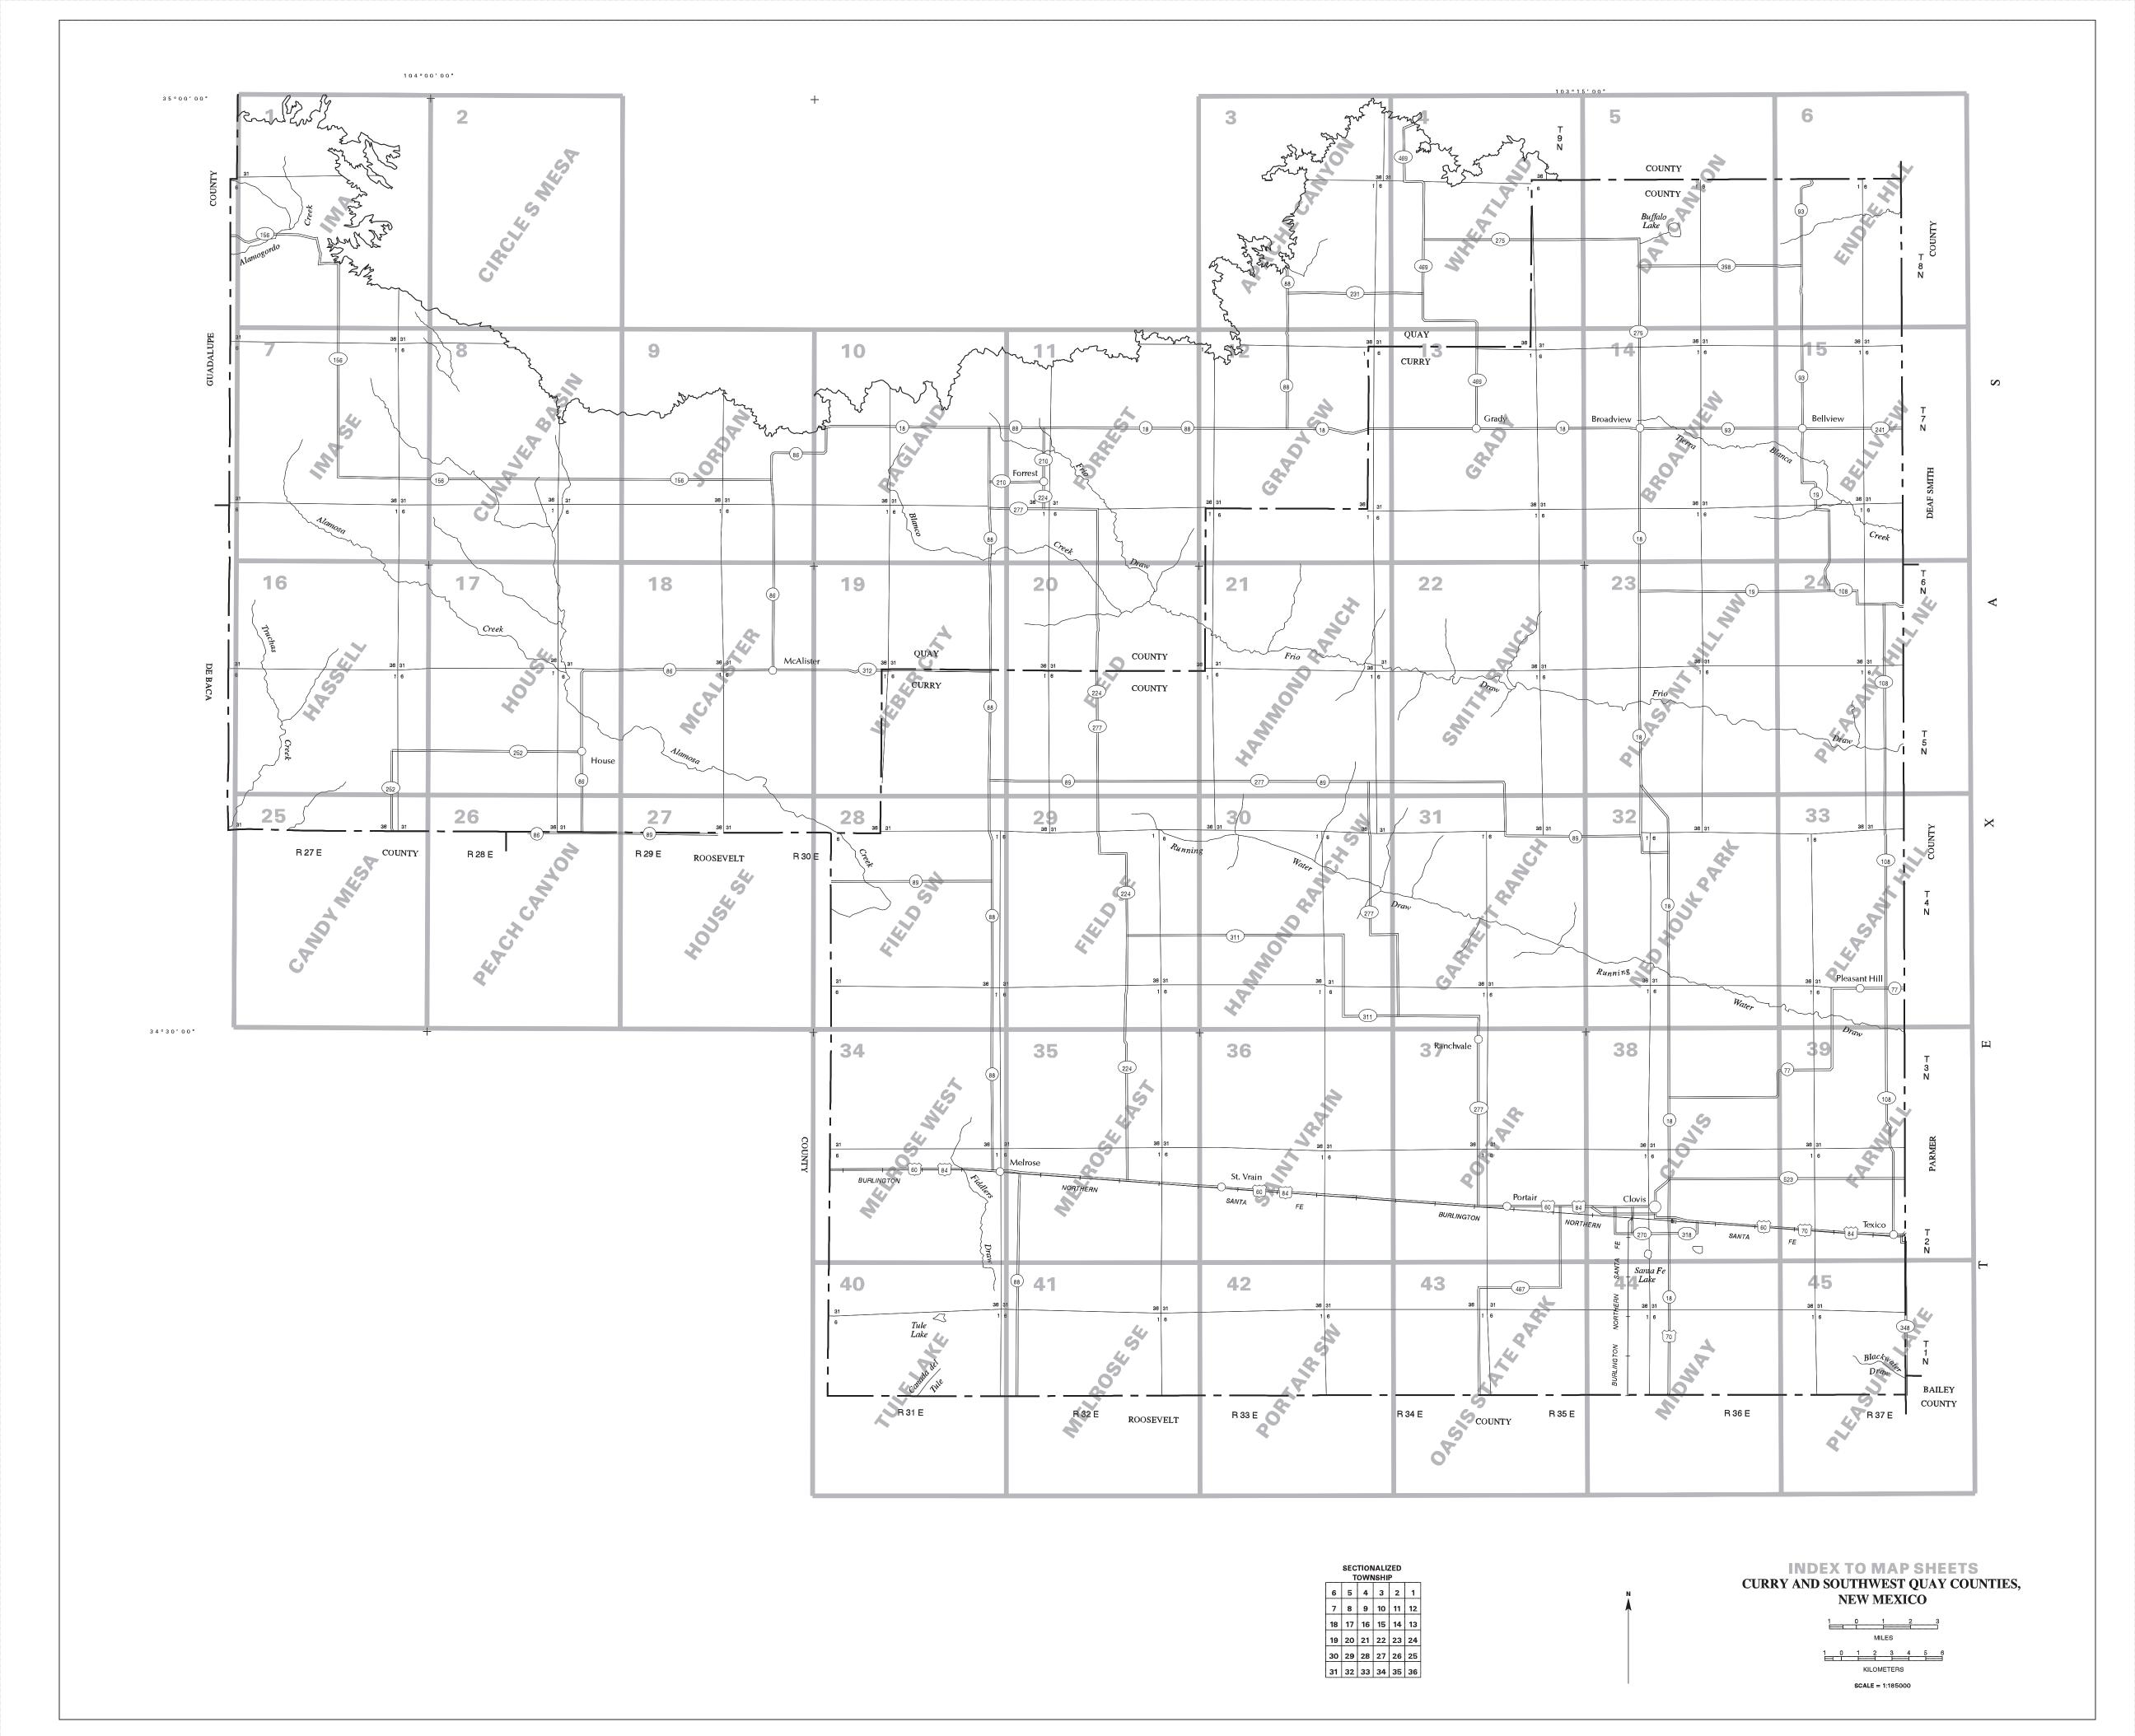

SOIL LEGEND

Map symbols consist of numbers or letters. The first letter is the initial letter of the component name. The second letter is generally lowercase. The third letter, when used, is capitalized and represents slope class. Symbols that are all capitalized are either miscellaneous units or represent more broadly defined map units.

SYMBOL NAME

Regnier-Rock outcrop-Lacoca complex, 30 to 80 percent slopes Tucumcari-Hassell clay loams, 0 to 5 percent slopes Tucumcari-Redona association, 0 to 5 percent slopes 28 Lacoca-San Jon-Rock outcrop complex. 5 to 20 percent slopes Chispa-Redona association, 0 to 3 percent slopes 32 Regnier-Lacoca-Rock outcrop complex, 3 to 25 percent slopes Alama silt loam, 1 to 5 percent slopes Ima-Gallen association, 2 to 7 percent slopes Redona-Armesa association, 0 to 5 percent slopes Chispa-Armesa-Redona association, 2 to 7 percent slopes 61 AcA Berwolf-Roswell association, 1 to 15 percent slopes Acuff loam, 0 to 1 percent slopes AcB AfA Acuff loam, 1 to 3 percent slopes Amarillo fine sandy loam, 0 to 1 percent slopes Amarillo fine sandy loam, 1 to 3 percent slopes AnB AvA Amarillo loamy fine sand, 1 to 3 percent slopes Arvana fine sandy loam, 0 to 1 percent slopes Bippus clay loam, 0 to 2 percent slopes, occasionally flooded DRC Drake soils, 1 to 8 percent slopes EsA Estacado loam, 0 to 1 percent slopes EsB FrA Estacado loam, 1 to 3 percent slopes Friona loam, 0 to 1 percent slopes Gomez loamy fine sand, 0 to 3 percent slopes GrA Grier clay, 0 to 2 percent slopes Kimberson gravelly loam, 0 to 3 percent slopes LcA LoA Lazbuddie clay, 0 to 1 percent slopes Lofton clay loam. 0 to 1 percent slopes McLean clay, 0 to 1 percent slopes, occasionally ponded MsD Milsand loamy fine sand, 1 to 8 percent slopes Milsand-Arch complex, 1 to 20 percent slopes MsE NtC NtD Nutivoli fine sand, 3 to 8 percent slopes Nutivoli fine sand 5 to 12 percent slopes Olton clay loam, 0 to 1 percent slopes OcB Olton clay loam, 1 to 3 percent slopes PcA Pep clay loam, 0 to 1 percent slopes PcB PeA Pep clay loam, 1 to 3 percent slopes Pep loam, 0 to 1 percent slopes PeB PMG Pep loam, 1 to 3 percent slopes Potter-Mobeetie association, 8 to 45 percent slopes Portales loam, 0 to 1 percent slopes PoA Posey fine sandy loam, 0 to 1 percent slopes PsB Posey fine sandy loam, 1 to 3 percent slopes Posey fine sandy loam, 3 to 8 percent slopes RaA Randall clay, 0 to 1 percent slopes, frequently ponded Ranco clay, 0 to 1 percent slopes, frequently ponded Slaughter loam, 0 to 2 percent slopes SnC Spantara fine sand, 1 to 5 percent slopes Sparenberg clay, 0 to 1 percent slopes, occasionally ponded Sparks loam, 0 to 2 percent slopes

CONVENTIONAL AND SPECIAL SYMBOLS LEGEND

SPECIAL SYMBOLS FOR SOIL **CULTURAL FEATURES** SURVEY AND SSURGO BOUNDARIES MISCELLANEOUS CULTURAL FEATURES SOIL DELINEATIONS AND SYMBOLS AcA AfA National, state, or province Farmstead, house LANDFORM FEATURES County or parish Church Bedrock escarpment Minor civil division School Other than bedrock escarpment Reservation (national forest or park state forest or park) Other religion Short steep slope Ranger Station Located object Limit of soil survey (label) Gully 2222222 and/or denied access area Petroleum Tank Field sheet matchline and neatline Depression closed A Previously published survey Lookout tower Sinkhole OTHERBOUNDARY Δ | Dorn | | + | + Oil and/or natural gas wells Airport, airfield Borrow pit \boxtimes χ Cemetery Figure 1 Gravel pit X City/county park Lighthouse STATE COORDINATE TICK Mine or quarry 1 890 000 FEET LAND DIVISION CORNER HYDROGRAPHIC FEATURES L _ + _ L (section and land grants) Landfill 0 GEOGRAPHIC COORDINATE TICK STREAMS TRANSPORTATION MISCELLANEOUS SURFACE FEATURES Perennial stream, double line Divided roads Blowout Perennial stream, single line Label only Other roads × Intermittent stream Label only Clay spot Trail Drainage end Label only Gravelly spot ROAD EMBI EMS AND DESIGNATIONS 1 DRAINAGE AND IRRIGATION 79 173 Interstate Marsh or swamp Double-line canal 287 Rock outcrop (includes sandstone and shale) Federal Perennial drainage and/or irrigation Label only Saline spot (52) Sandy spot Intermittent drainage and/or irrigation Label only County, farm or ranch 1283 ÷ Severely eroded spot RAILROAD SMALL LAKES, PONDS, AND RESERVOIRS Slide or slip Ø Sodic spot POWER TRANSMISSION LINE Perennial water Ξ Spoil area 0 Miscellaneous water PIPELINE 0 Stony spot Flood pool line 00 Very stony spot FENCE MISCELLANEOUS WATER FEATURES Wet spot LEVEES Spring 0-Without road Well artesian With road Well, irrigation With railroad Single side slope DAMS LANDFORM FEATURES 11 Prominent hill or peak (3) Soil sample site

FEET

1 0

North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle.

QUADRANGLE LOCATION

Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets.


7 IMA SE

7 8 9 8 CUNAVEA BASIN 9 JORDAN

INDEX TO ADJOINING 7.5 MAPS

INDEX TO ADJOINING 7.5 MAPS


Joins sheet 19 Weber City This soil survey was compiled by the U.S. Department of Agriculture, Natural Resources Conservation Service SCALE 1:24000 and cooperating agencies. Base maps are orthophotographs prepared by the U.S. Department of the Interior, Geological Survey, from 1996-1997 aerial photography. Administrative boundaries were acquired from the State of New Mexico. Boundaries may have been edited to conform with features represented on the publication orthophotography or to enhance the clarity of the soils information. RAGLAND, NEW MEXICO 1 0 7.5 MINUTE SERIES SHEET NUMBER 10 OF 45 1000 0 1000 2000 3000 4000 5000 6000 7000 9 JORDAN 11 FORREST Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets. FEET 18 MCALISTER North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle. 18 19 20 19 WEBER CITY 20 FIELD QUADRANGLE LOCATION 1 0 INDEX TO ADJOINING 7.5 MAPS KILOMETERS

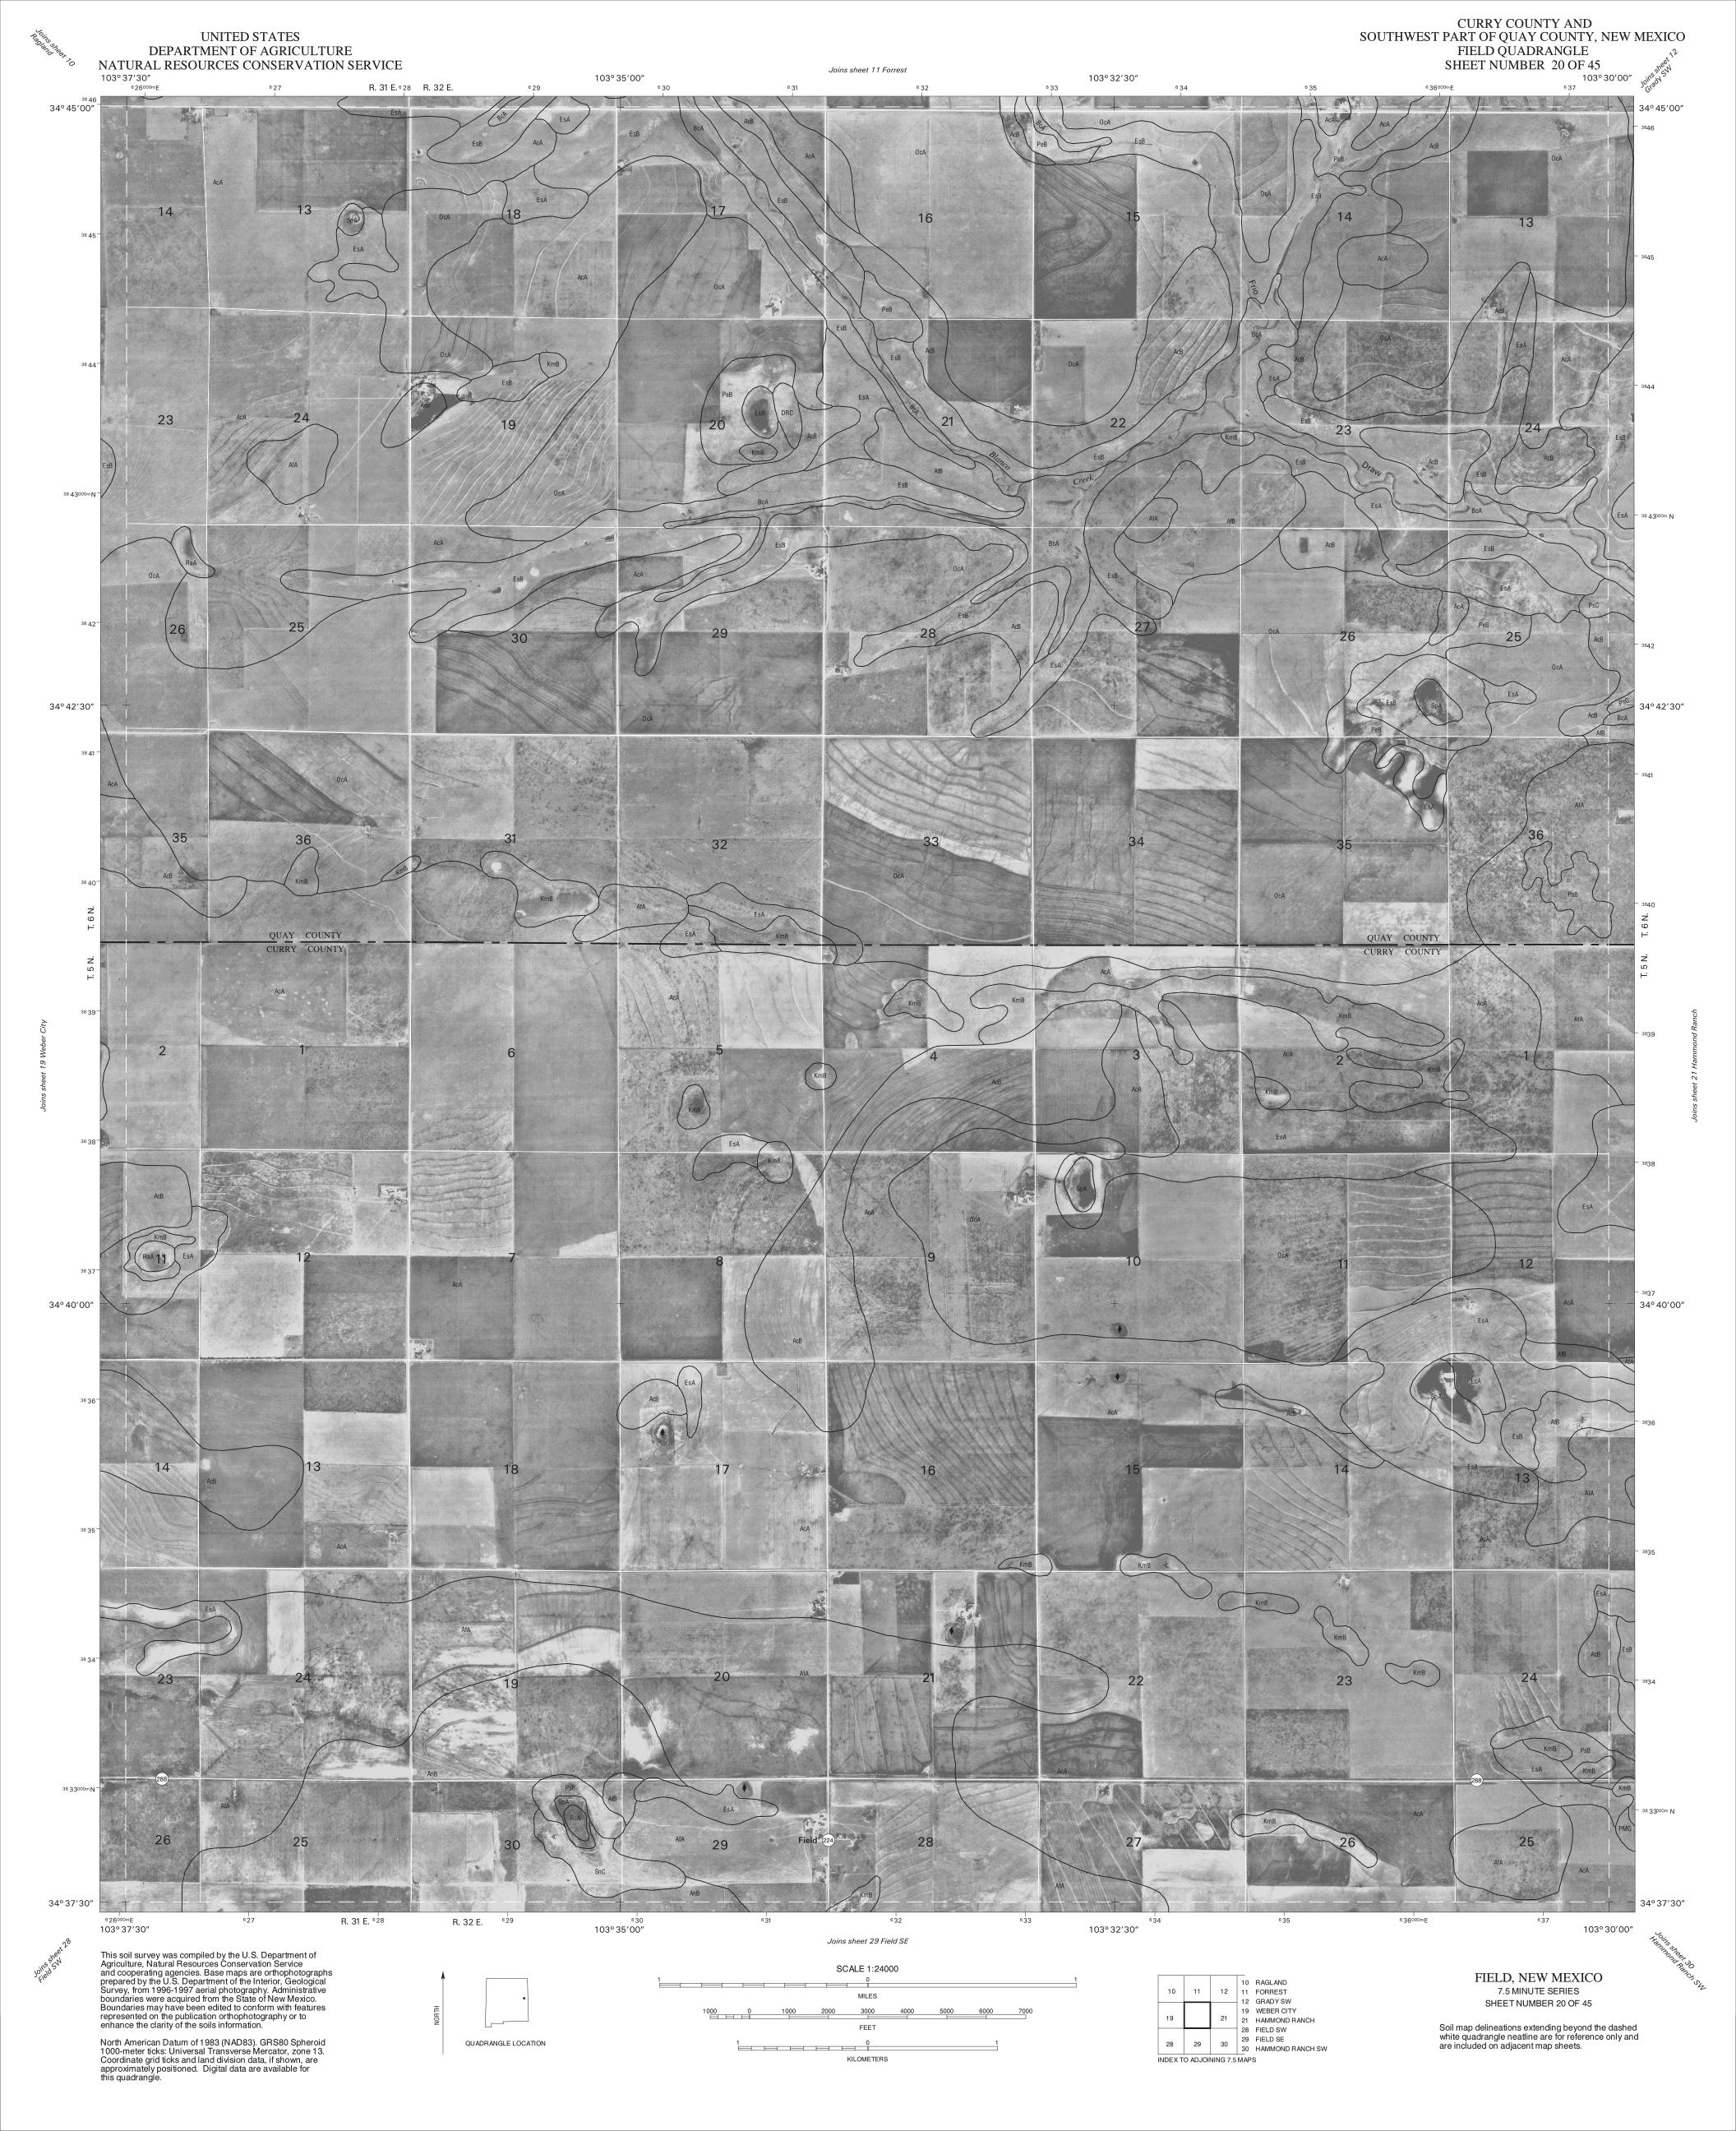


CURRY COUNTY AND SOUTHWEST PART OF QUAY COUNTY, NEW MEXICO **UNITED STATES** PLEASANT HILL NE QUADRANGLE
SHEET NUMBER 24 OF 45

103° 00′ 00″

882000mE
883000mE
103° 00′ 00″ DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE
103° 07'30" Joins sheet 15 Bellview 103° 05′00″ 103° 02′30″ 674 676 R. 36 E. R. 37 E. 6 75 679 3847 34° 45′00″ 34° 45′00″ 11 DEAF SMITH COUNTY
PARMER COUNTY 14 38 45 23 20 22 38 43000m N 34° 42′30″ 34° 42′30″ 34° 40′ 00″ 34° 40′00″ 38 36 38 35 38 33000m N 34° 37′ 30″ 672000mE 103°07′30″ R. 36 E. R. 37 E. ⁶77 103° 05′00″ 103° 02′30″ 103° 00′ 00″ Joins sheet 33 Pleasant Hill This soil survey was compiled by the U.S. Department of Agriculture, Natural Resources Conservation Service SCALE 1:24000 and cooperating agencies. Base maps are orthophotographs prepared by the U.S. Department of the Interior, Geological Survey, from 1996-1997 aerial photography. Administrative boundaries were acquired from the State of New Mexico. Boundaries may have been edited to conform with features represented on the publication orthophotography or to enhance the clarity of the soils information. PLEASANT HILL NE, NEW MEXICO 14 BROADVIEW 1 0 14 15 7.5 MINUTE SERIES 15 BELLVIEW SHEET NUMBER 24 OF 45 1000 0 1000 2000 3000 4000 5000 6000 7000 23 PLEASANTHILL NW 23 Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets. FEET 32 NED HOUK PARK North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle. 33 PLEASANTHILL QUADRANGLE LOCATION 1 0 32 33 INDEX TO ADJOINING 7.5 MAPS

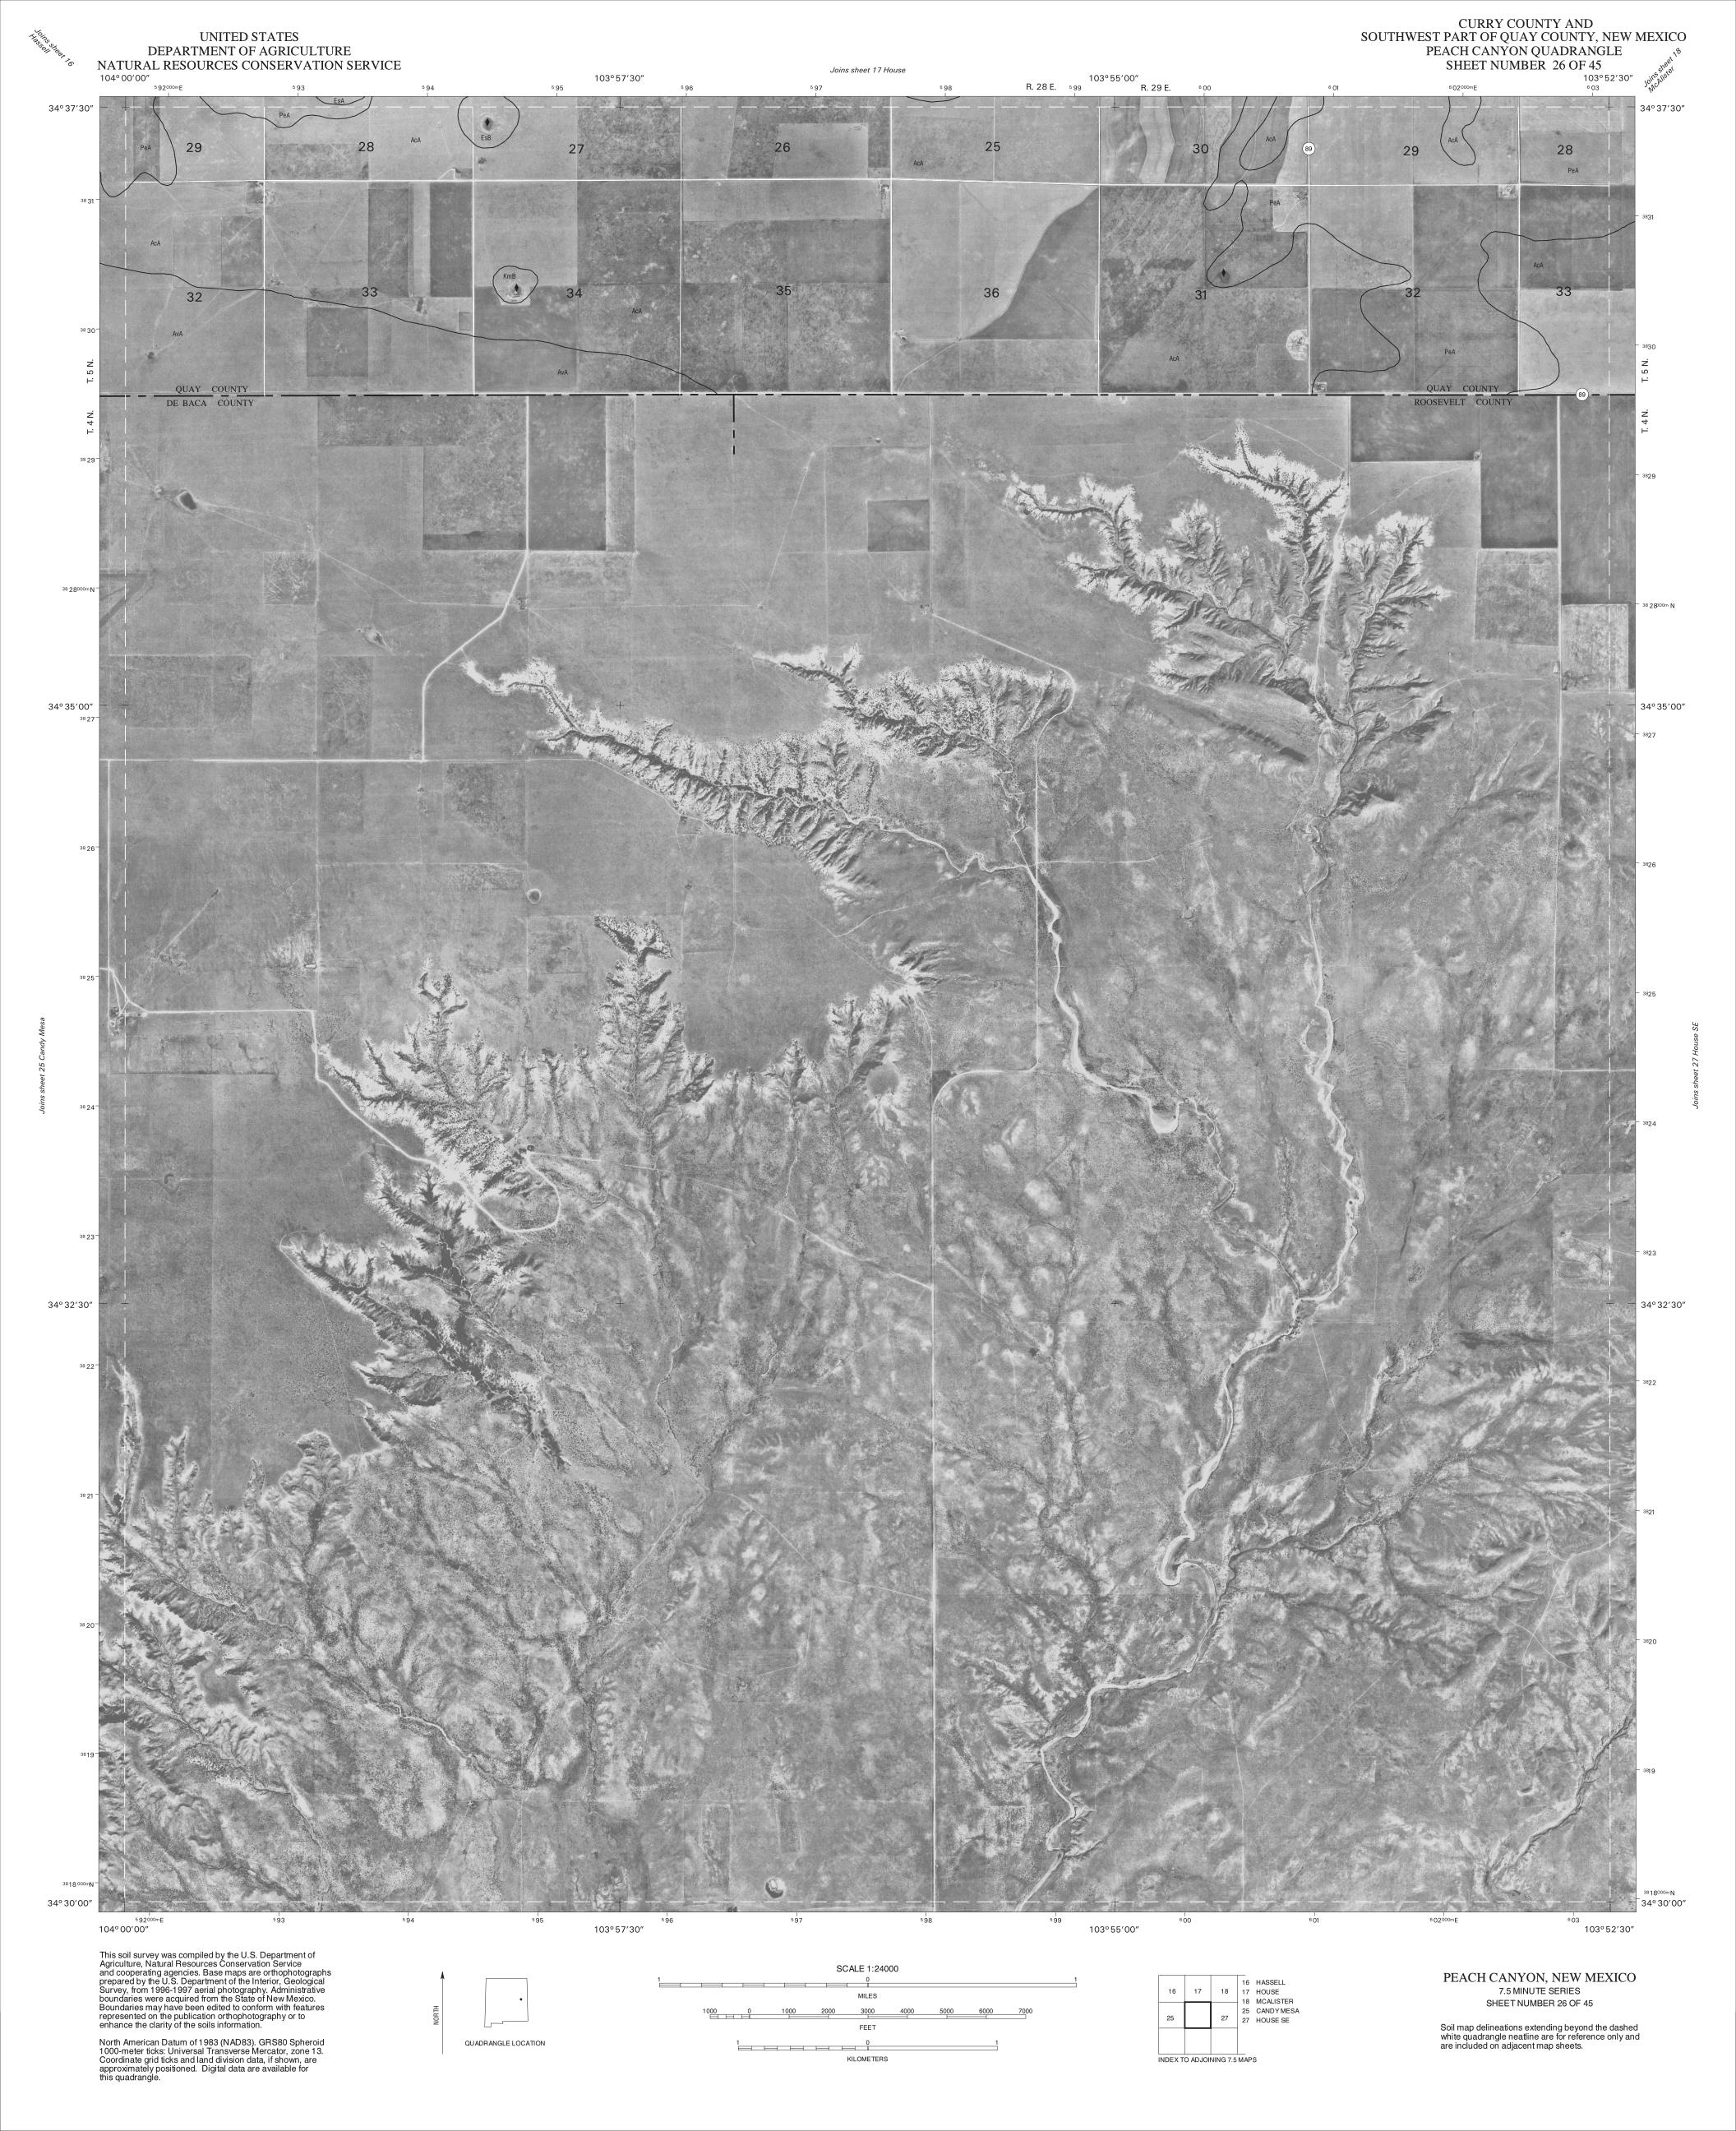

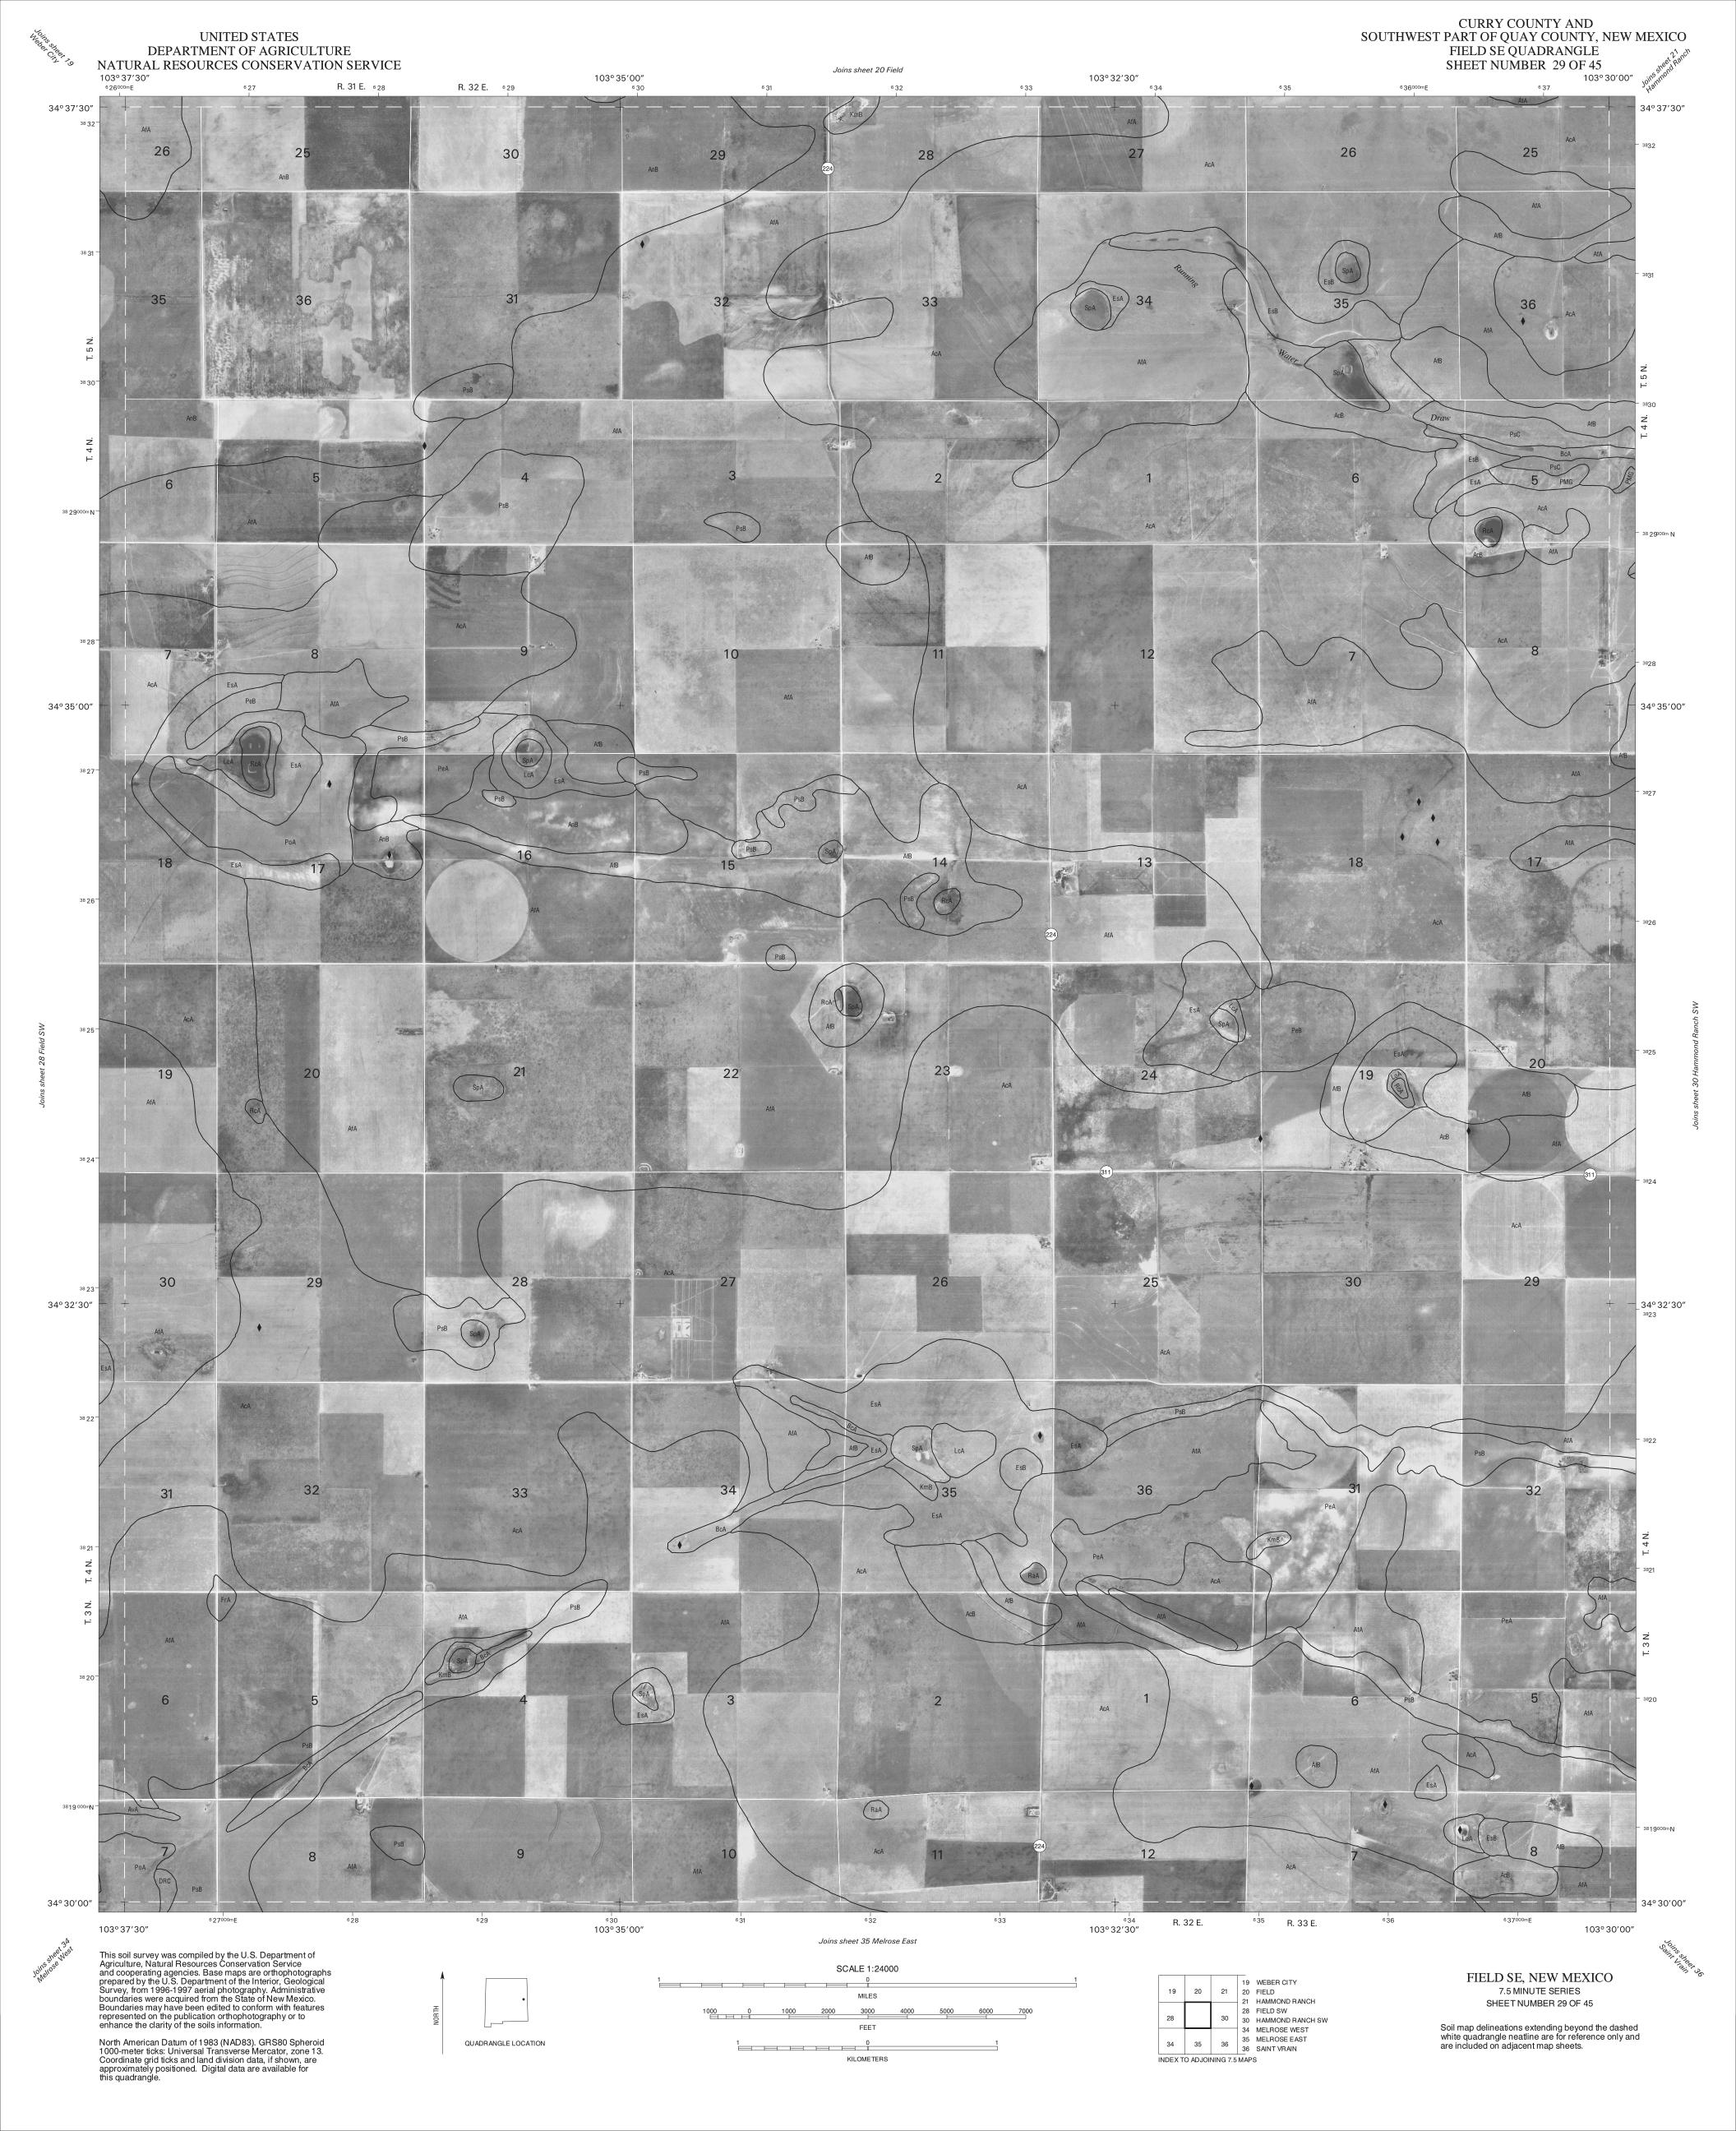



UNITED STATES DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE
103° 30'00" Joins sheet 30 Hammond Ranch SW 103° 27′ 30″ 103° 25′00″ 6 41 R. 33 E. R. 34 E. 6 45 34° 30′ 00″ 34° 30′ 00″ 17 16 20 22 3814 - 34° 27′30″ 34° 27′ 30″ 28 25 30 28 26 29 3813 32 36 33 35 34° 25′ 00″ 34° 25′00″ 60 84 13 20 28 34° 22′30″ R. 34 E. 103° 25′00″ 103°27′30″ 638000mE 103°30′00″ R. 33 E. 103° 22′30″ Joins sheet 42 Portair SW This soil survey was compiled by the U.S. Department of Agriculture, Natural Resources Conservation Service SCALE 1:24000 and cooperating agencies. Base maps are orthophotographs prepared by the U.S. Department of the Interior, Geological Survey, from 1996-1997 aerial photography. Administrative boundaries were acquired from the State of New Mexico. Boundaries may have been edited to conform with features represented on the publication orthophotography or to enhance the clarity of the soils information. SAINT VRAIN, NEW MEXICO 29 30 31 30 HAMMOND RANCH SW 31 GARRETT RANCH 1 0 7.5 MINUTE SERIES SHEET NUMBER 36 OF 45 1000 0 1000 2000 3000 4000 5000 6000 7000 35 MELROSE EAST 37 STATE OF THE ST Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets. FEET North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle. 42 43 43 PORTAIR SW 43 OASIS STATE PARK QUADRANGLE LOCATION 1 0 INDEX TO ADJOINING 7.5 MAPS



CURRY COUNTY AND
SOUTHWEST PART OF QUAY COUNTY, NEW MEXICO
CLOVIS QUADRANGLE
SHEET NUMBER 38 OF 45 UNITED STATES DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE
103°15′00″ Joins sheet 32 Ned Houk Park 103°12′30″ R. 35 E. 664 R. 36 E. 103° 07′30″ 103°10′00″ 34° 30′ 00″ 12 11 23 34° 27′ 30″ 34° 27′ 30″ 36 34° 25′00″ 38 05000m N ⁻ 661 000mE 103°15′00″ R. 35 E. 664 103° 07′30″ 103°10′00″ Joins sheet 44 Midway This soil survey was compiled by the U.S. Department of Agriculture, Natural Resources Conservation Service and cooperating agencies. Base maps are orthophotographs prepared by the U.S. Department of the Interior, Geological Survey, from 1996-1997 aerial photography. Administrative boundaries were acquired from the State of New Mexico. Boundaries may have been edited to conform with features represented on the publication orthophotography or to ephance the clarity of the soils information. 31 GARRETT RANCH
32 33 32 NED HOUK PARK
33 PLEASANT HILL
37 PORTAIR CLOVIS, NEW MEXICO 7.5 MINUTE SERIES SHEET NUMBER 38 OF 45 1000 0 1000 2000 3000 4000 5000 6000 7000 39 39 FARWELL 43 OASIS STATE PARK Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets. enhance the clarity of the soils information. FEET North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle. 44 MIDWAY 45 PLEASURE LAKE QUADRANGLE LOCATION 1 0 INDEX TO ADJOINING 7.5 MAPS



CURRY COUNTY AND SOUTHWEST PART OF QUAY COUNTY, NEW MEXICO 38 UNITED STATES OASIS STATE PARK QUADRANGLE SHEET NUMBER 43 OF 45 DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE 103° 22'30" 103°20′00″ °53 Joins sheet 37 Portair 103°17′30″ ⁶57 654 R. 34 E. R. 35 E. 655 ⁶58 34° 22′30″ 34° 22′ 30″ 27 28 38 03 34° 20′ 00″ 34° 20′ 00″ 10 10 16 CURRY COUNTY
ROOSEVELT COUNTY CURRY COUNTY ROOSEVELT COUNTY 34°17′30″ 34°17′30″ 34°15′00″ 661 103°15′00″ R. 34 E. ⁶⁵⁵ R. 35 E. 103°17′30″ 103° 20′00″ This soil survey was compiled by the U.S. Department of Agriculture, Natural Resources Conservation Service SCALE 1:24000 and cooperating agencies. Base maps are orthophotographs prepared by the U.S. Department of the Interior, Geological Survey, from 1996-1997 aerial photography. Administrative boundaries were acquired from the State of New Mexico. Boundaries may have been edited to conform with features represented on the publication orthophotography or to enhance the clarity of the soils information. 36 SAINT VRAIN
37 38 37 PORTAIR
38 CLOVIS
42 PORTAIR SW OASIS STATE PARK, NEW MEXICO 1 0 7.5 MINUTE SERIES SHEET NUMBER 43 OF 45 1000 0 1000 2000 3000 4000 5000 6000 7000 44 44 MIDWAY Soil map delineations extending beyond the dashed white quadrangle neatline are for reference only and are included on adjacent map sheets. North American Datum of 1983 (NAD83). GRS80 Spheroid 1000-meter ticks: Universal Transverse Mercator, zone 13. Coordinate grid ticks and land division data, if shown, are approximately positioned. Digital data are available for this quadrangle. 1 0 QUADRANGLE LOCATION INDEX TO ADJOINING 7.5 MAPS

